








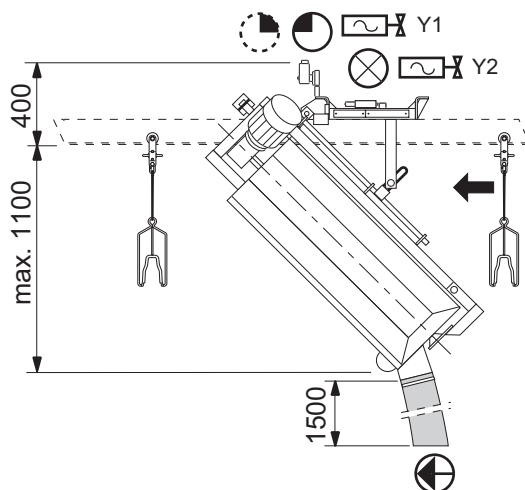

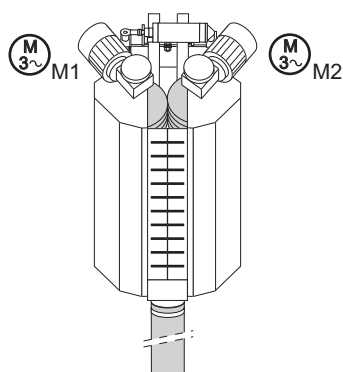

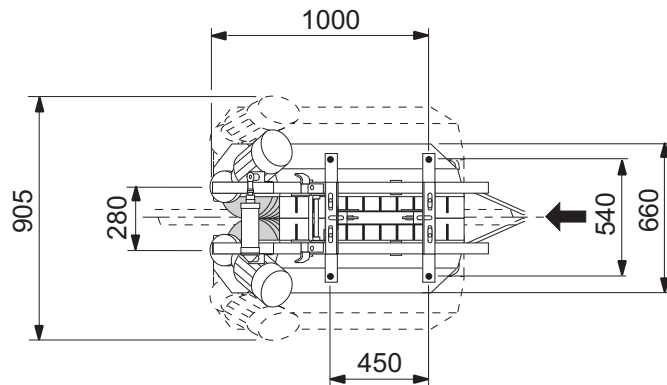

Dimensions in mm



SI units [US units]

MEDIUM			UNIT	TEMPERATURE	CONNECTION	CONSUMPTION
motor		M1, M2			2 x (4 x 2.5 mm ²) [2 x (4 x 14 AWG)]	2 x 0,75 kW [2 x 1.0 HP]
AC valve		Y1, Y2	24 VAC [110 VAC]		2 x (3 x 1,5 mm ²)	2 x 8 W [2 x 0.01 HP]
cold water			100 - 300 kPa [14.5 - 43.5 PSI]	1 - 20°C [34 - 68°F]	 ø10 mm	0,1 m ³ /h [0.5 gpm]
hot water*				1 - 65°C [34 - 150°F] adjustable		
compressed air			500 - 700 kPa [72.5 - 101.5 PSI]		 ø8 mm	< 0,5 Nm ³ /h [< 0.29 CFM]
drainage					 ø150 mm	
airborne noise emission			LpA ≤ 70 dB(A)			
mass: 170 kg [375 lb.]			suspension points	●	load per point	50 kg [110 lb.]

* hot water only if shackle washer is also used for cleaning with hot water during breaks or end of production

Technical Data

Marel Poultry B.V.
Boxmeer, The Netherlands

Marel, Inc.
Gainesville, USA

3690492_01_C