






# Opening machine

VO-20 RS  
VO-15 RS (8")

C1075  
C1076

Dimensions in mm

Type	sigma / T profile			tube track		
	0	60	90	0	60	90
VO 15/20 RS	x	x	x	x	-	-

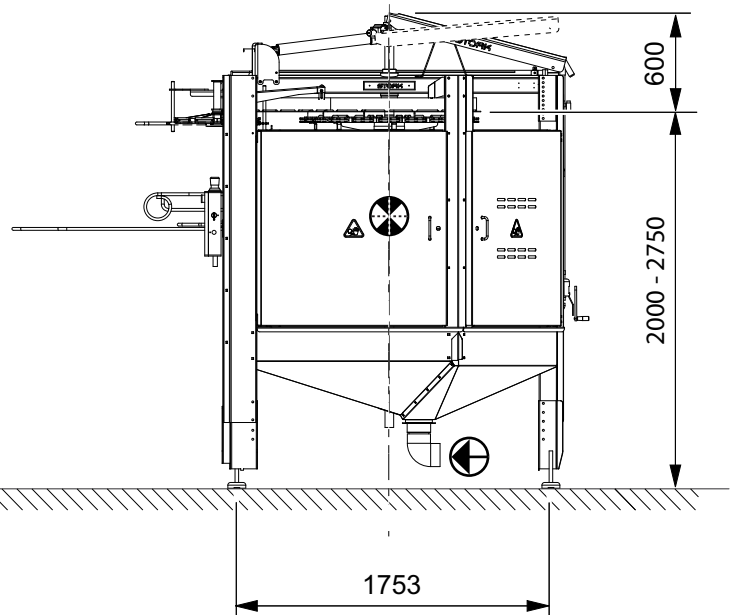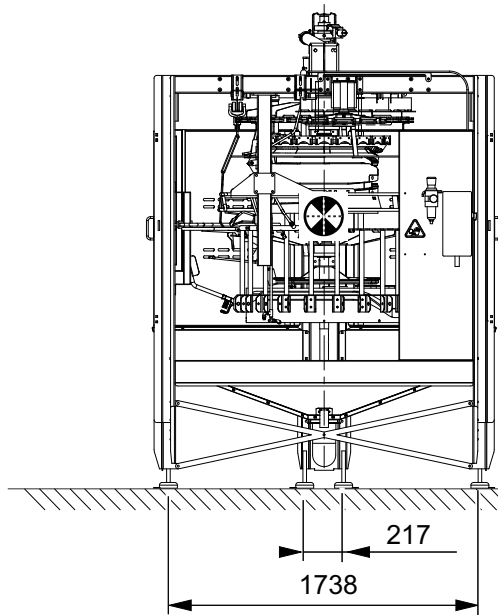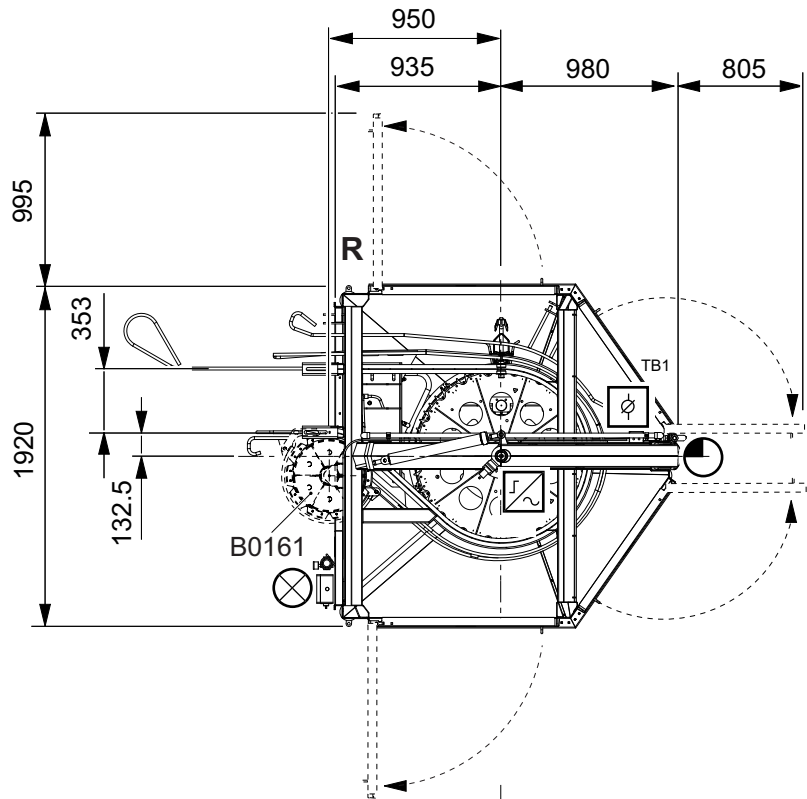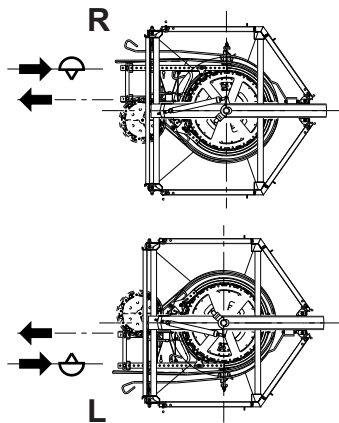

## Technical Data

Marel Poultry B.V.  
Boxmeer, The Netherlands

Marel, Inc.  
Gainesville, USA











3690400\_02\_E

## Opening machine

**VO-20 RS**  
**VO-15 RS (8")**

**C1075**  
**C1076**

SI units [US units]

MEDIUM			UNIT	TEMPERATURE	CONNECTION	CONSUMPTION
AC sensor		S1	24 VAC [110 VAC]		factory wired	0,5 W
terminal box		TB1			3 x 1 mm <sup>2</sup> [3 x 16 AWG]	
compressed air			400 - 500 kPa [58 - 72.5 PSI]		 ø8 mm	< 0,1 Nm <sup>3</sup> /h [< 0,05 CFM]
cold water			100 - 300 kPa [14.5 - 43.5 PSI]	1 - 20°C [34 - 68°F]	 Rp <sup>3</sup> / <sub>8</sub> [3/8 NPT]	0,75 m <sup>3</sup> /h [3.3 GPM]
drainage					 ø 110 mm [4" pvc pipe]	
centre of gravity						
airborne noise emissions			LpA = 73 dB(A)			
mass			1125 kg [2480 lb.]			

## Technical Data

Marel Poultry B.V.  
Boxmeer, The Netherlands

Marel, Inc.  
Gainesville, USA

**3690400\_02\_E**