









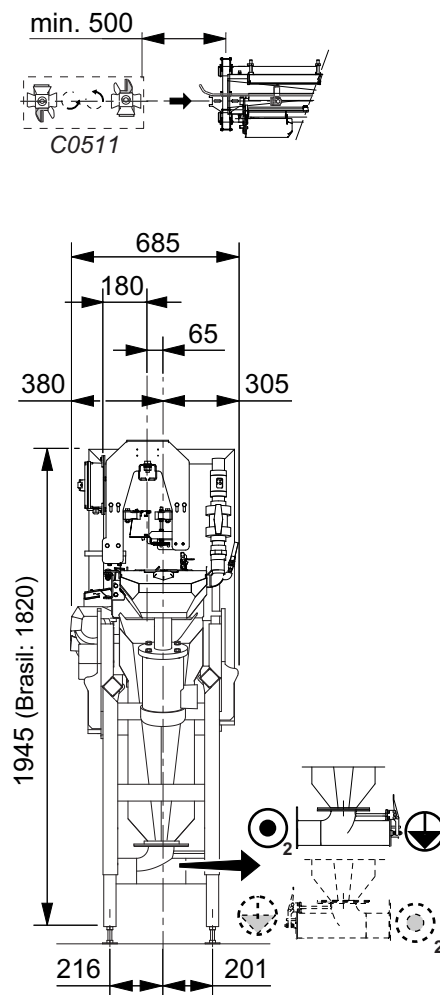

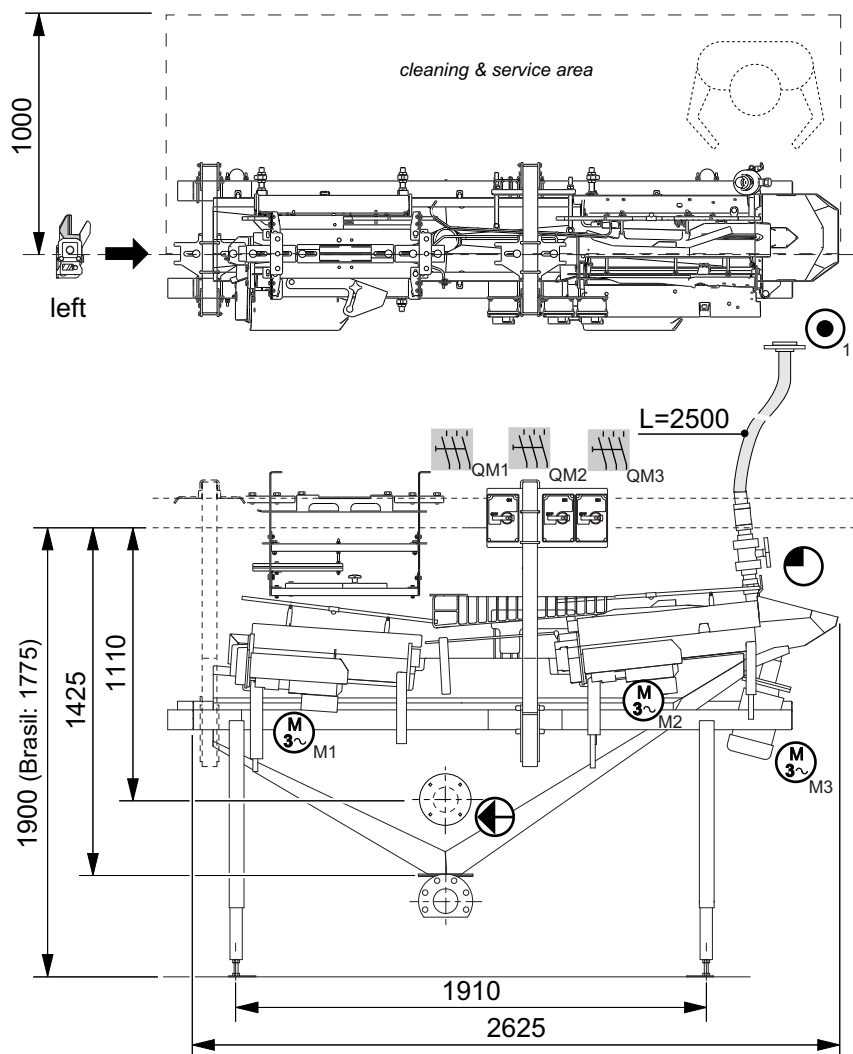





Dimensions in mm



SI units [US units]

MEDIUM		UNIT	TEMPERATURE	CONNECTION	CONSUMPTION
motor	 1	M1, M2		Factory wired to QM1, QM2	2 x 1,1 kW [1,5 Hp]
motor	 2	M3		Factory wired to QM3	0,75 kW [1 Hp]
3-pole switch		QM1, QM2, QM3		3x (4 x 2,5 mm <sup>2</sup> ) [3x (4 x 14 AWG)]	
cold water			100 - 300 kPa [14.5 - 43.5 PSI]	 ø8 mm tube [1/4 NPT]	0,6 m <sup>3</sup> /h [2.6 GPM]
vacuum	 1		-80 to -75 kPa 150 - 190 mmHg [6 - 7.5 in.Hg]	 DN100 PN10 [4" pvc elbow]	300 m <sup>3</sup> /h [177 CFM]
vacuum	 2		D2100	 DN100 PN10 [4" pvc elbow]	300 m <sup>3</sup> /h [177 CFM]
drainage				 DN100 PN10 [4" pvc elbow]	
drain				 ø 100 mm	
airborne noise emissions			LpA = 79 dB(A)		

# Technical Data

Marel Poultry B.V.  
Boxmeer, The Netherlands

Marel, Inc.  
Gainesville, USA

3690352\_04\_B