
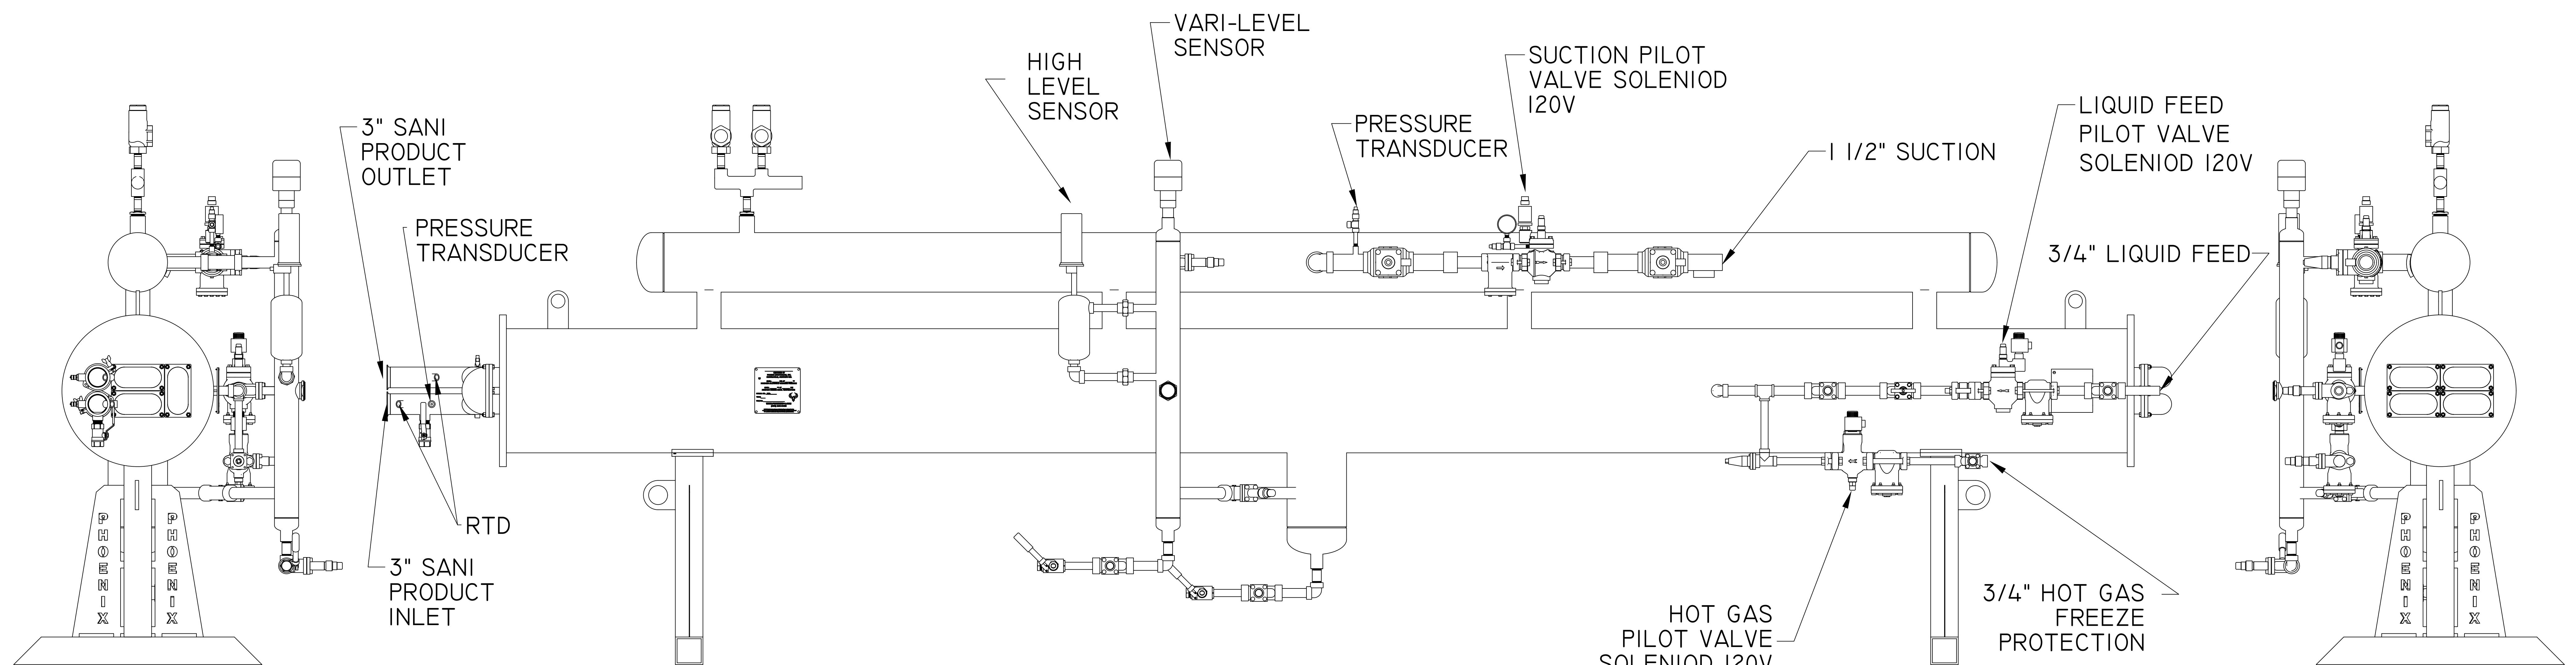


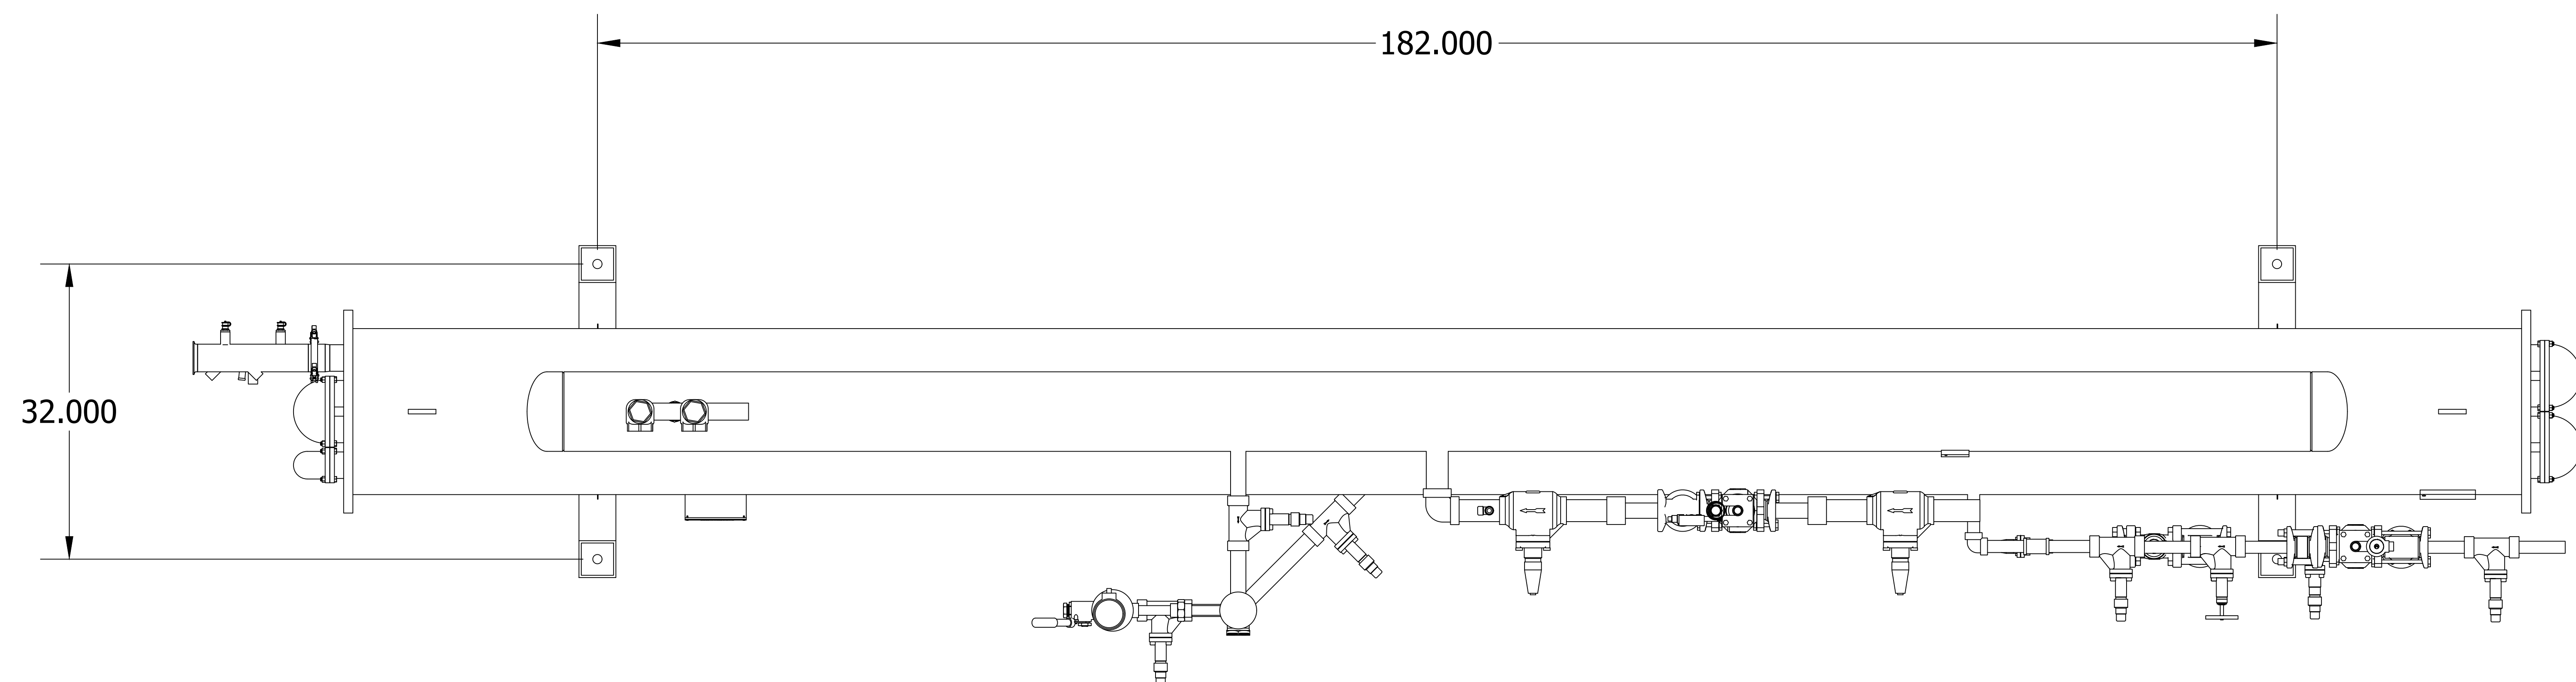

SPECIFICATIONS

- (I) CAPACITY= 16 T.R. @ 23° OF SUCTION
- (2) NH3 CHARGE= 430 LBS
- (3) LIQUID FEED= HIGH PRESSURE OR LOW PRESSURE
- (4) PRESSURE RATING= 250 PSI @ 350 °F
- (5) SHIPPING WEIGHT= 3000 LBS
- (6) OPERATING WEIGHT= 3900 LBS
- (7) SUCTION MODULATION IS DIGITALLY TEMP. CONTROLLED
- (8) ALL STAINLESS FRAME CONSTRUCTION
- (9) CONTROL PANELS INCLUDED
- (10) ALL CONTROL VALVES HAVE HAND ISOLATION VALVES
- (II) UNIT COMES INSULATED FROM THE FACTORY
- (12) INCLUDES 2 PRESSURE TRANSDUCERS AND 2 RTDS FOR TEMPERATURE CONTROL

FROM PANEL TO HEAT EXCHANGER:

4 RUNS OF SHIELDED 16 GAUGE 4 CONDUCTOR FOR RTD AND PRESSURE TRANSDUCER


RUNS FOR 3 REFRIGERATION VALVE SOLENOIDS WILL DEPEND ON TYPES OF VALVES

1 RUN OF 16 GAUGE 2 CONDUCTOR SHIELDED TO VARI-LEVEL SENSOR

1 RUN OF 16 GAUGE 4 CONDUCTOR FOR HIGH LEVEL SENSOR

ELECTRICAL SPECIFICATION

120 V - 1Ø - 60 Hz - 5 AMP

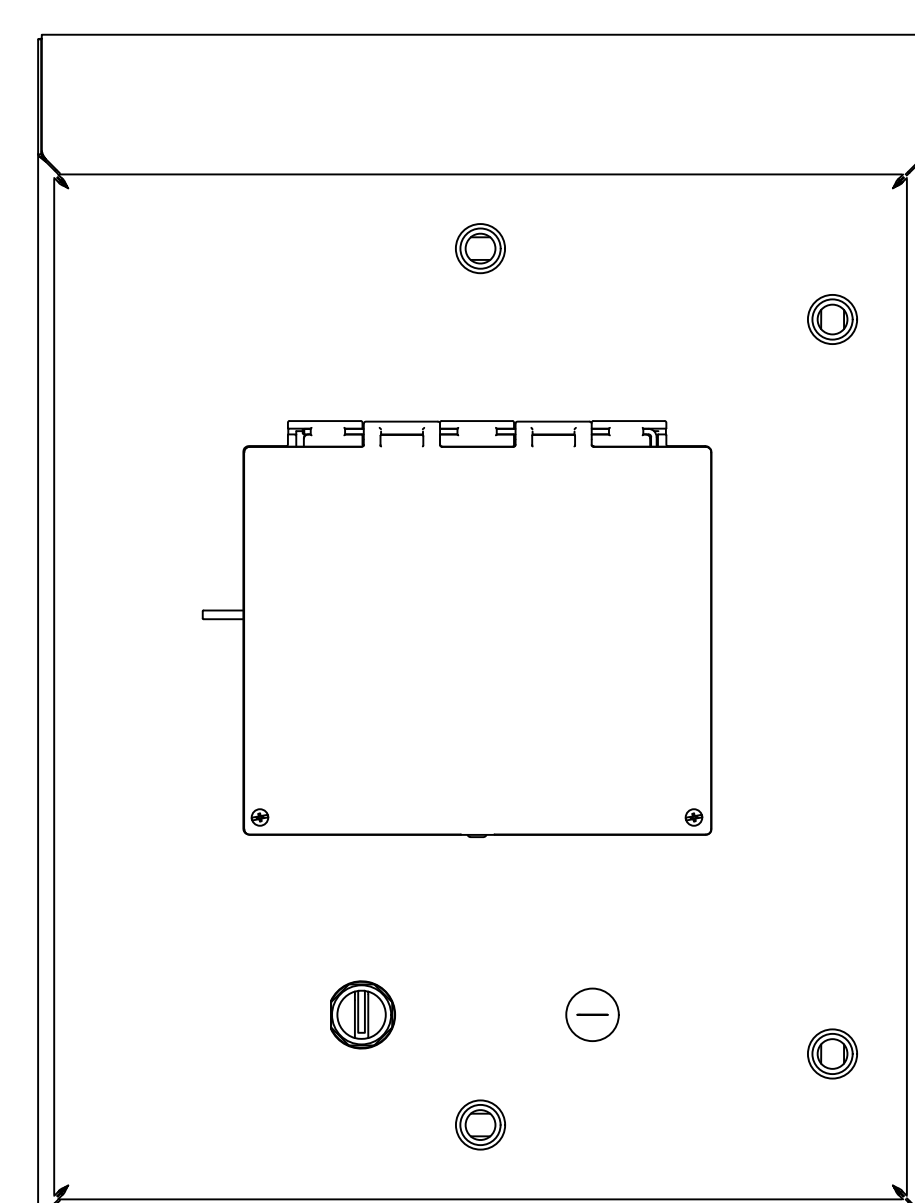

	PHOENIX INNOVATIONS	
	4254 S. ARKANSAS AVE. RUSSELLVILLE, AR 72802	
	PART NO.	504952
	DESCRIPTION:	PGI-016X
TOLERANCE IF NOT OTHERWISE STATED +/- 0.063in	MATERIAL:	
	ENGINEER:	ISAAC ROGERS
	CREATION DATE:	5/17/2024

ALL INFORMATION CONTAINED HEREIN IS PROPRIETARY, AND AS SUCH, MAY NOT BE REPRODUCED IN WHOLE OR IN PART, OR DISCLOSED TO OTHERS, WITHOUT THE PRIOR WRITTEN CONSENT OF PHOENIX INNOVATIONS