
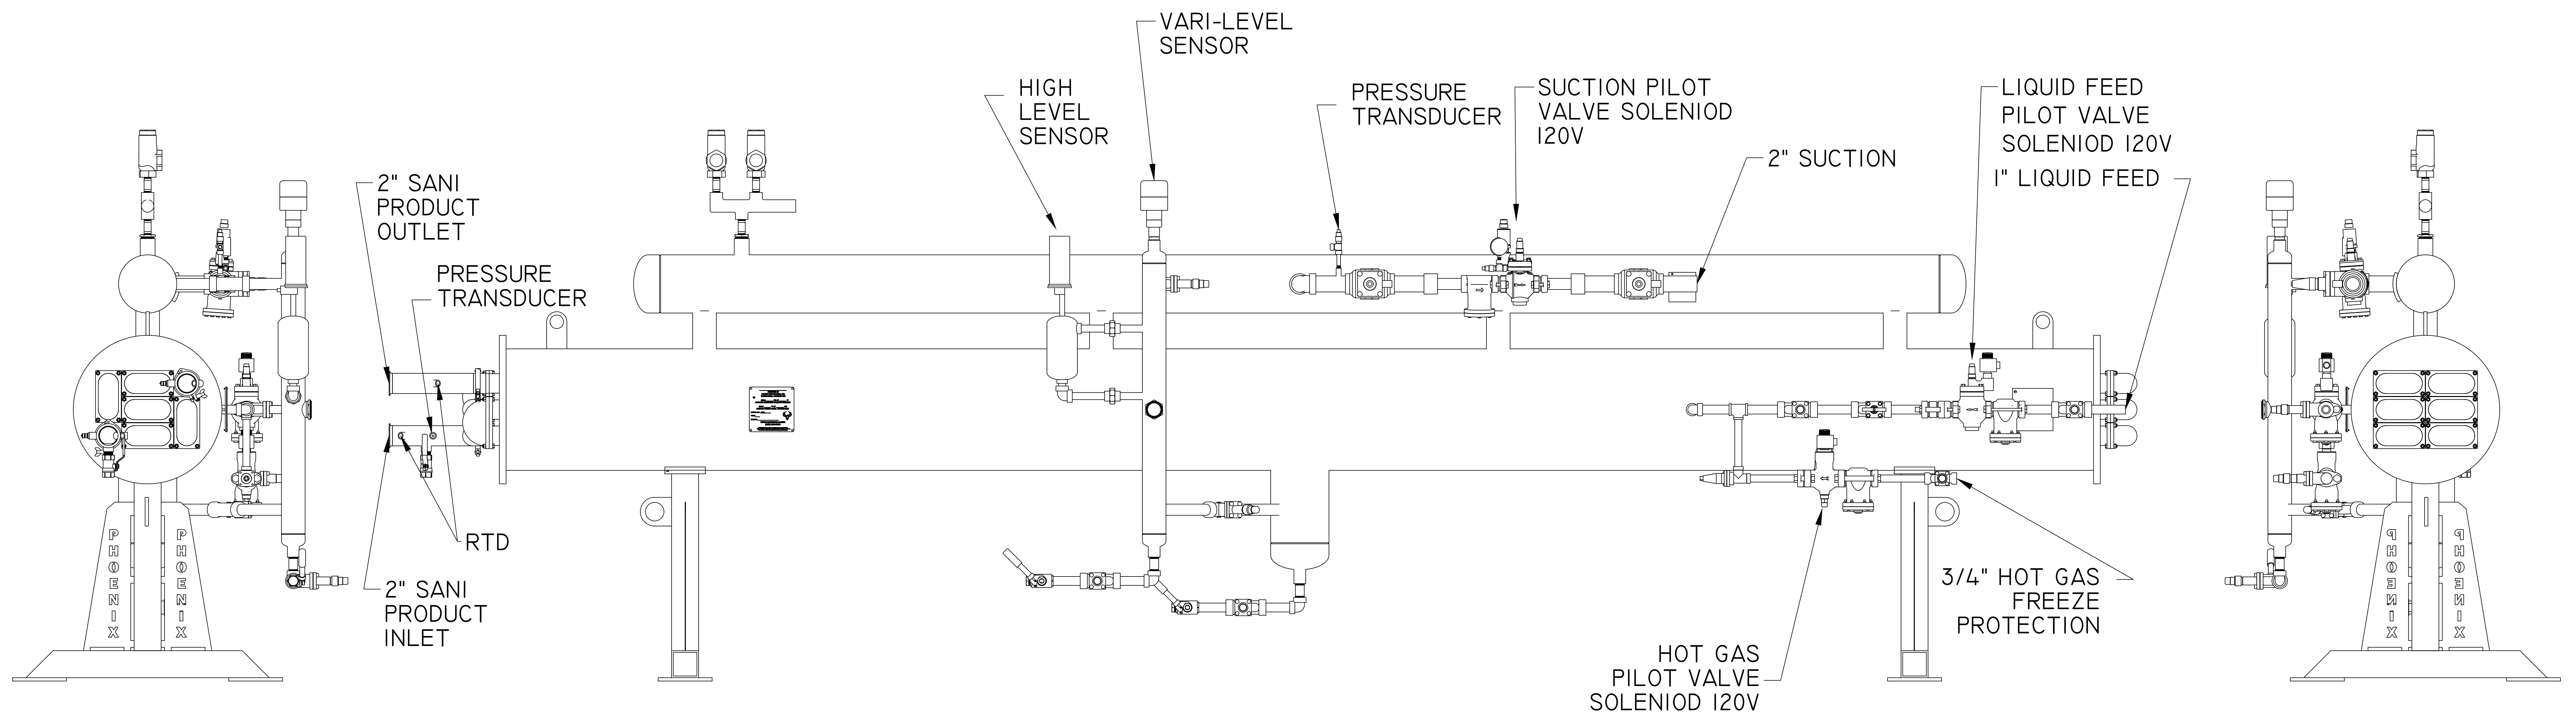


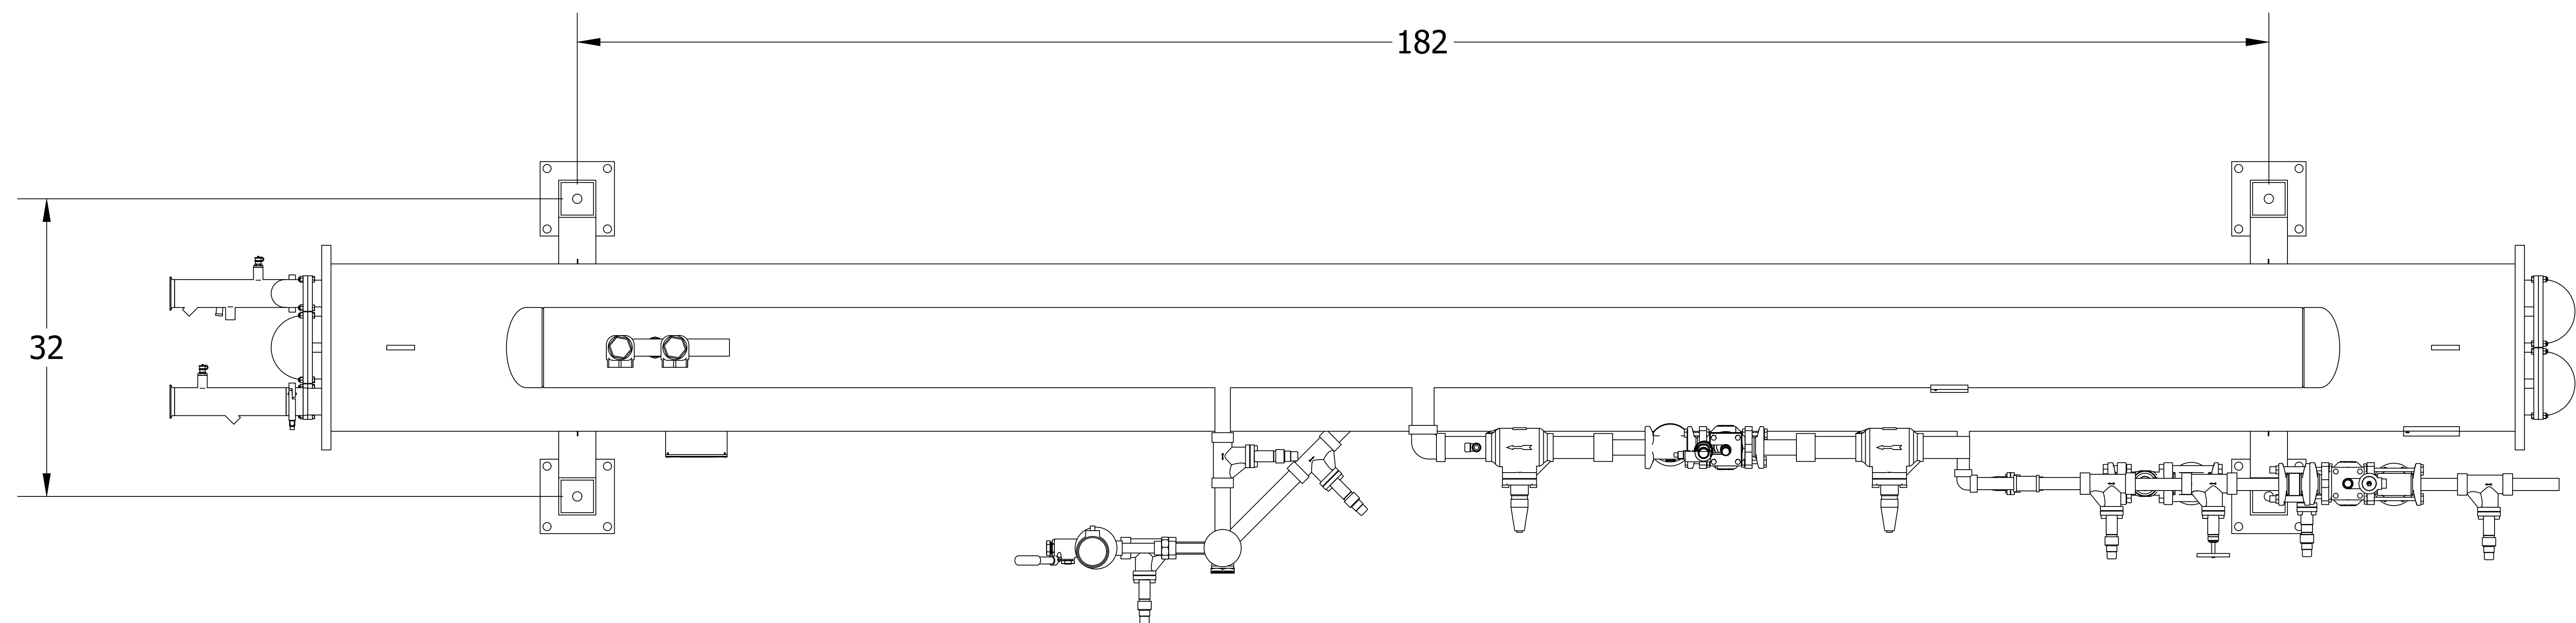

#### SPECIFICATIONS

- (1) CAPACITY= 24 T.R. @ 23° OF SUCTION
- (2) NH3 CHARGE= 1098 LBS
- (3) LIQUID FEED= HIGH PRESSURE OR LOW PRESSURE
- (4) PRESSURE RATING= 250 PSI @ 350 °F
- (5) SHIPPING WEIGHT= 3412 LBS
- (6) OPERATING WEIGHT= 5061 LBS
- (7) SUCTION MODULATION IS DIGITALLY TEMP. CONTROLLED
- (8) ALL STAINLESS FRAME CONSTRUCTION
- (9) CONTROL PANELS INCLUDED
- (10) ALL CONTROL VALVES HAVE HAND ISOLATION VALVES
- (II) UNIT COMES INSULATED FROM THE FACTORY
- (12) INCLUDES 2 PRESSURE TRANSDUCERS AND 2 RTDs FOR TEMPERATURE CONTROL

#### FROM PANEL TO HEAT EXCHANGER:

4 RUNS OF SHIELDED 16 GAUGE 4 CONDUCTOR FOR RTD AND PRESSURE TRANSDUCER

RUNS FOR 3 REFRIGERATION VALVE SOLENOIDS WILL DEPEND ON TYPES OF VALVES

1 RUN OF 16 GAUGE 2 CONDUCTOR SHIELDED TO VARI-LEVEL SENSOR

1 RUN OF 16 GAUGE 4 CONDUCTOR FOR HIGH LEVEL SENSOR

#### ELECTRICAL SPECIFICATION

120 V - 1Ø - 60 HZ - 5 AMP



**PHOENIX INNOVATIONS**

4254 S. ARKANSAS AVE. RUSSELLVILLE, AR 72802

PART NO.  
504511

DESCRIPTION: PGI-024

MATERIAL:

ENGINEER: ISAAC ROGERS

CREATION DATE: 5/17/2024

TOLERANCE IF NOT OTHERWISE STATED  
+/- 0.063in

SHEET 1 OF 1

ALL INFORMATION CONTAINED HEREIN IS PROPRIETARY, AND AS SUCH, MAY NOT BE REPRODUCED IN WHOLE OR IN PART, OR DISCLOSED TO OTHERS, WITHOUT THE PRIOR WRITTEN CONSENT OF PHOENIX INNOVATIONS