


PARTS LIST - STAINLESS STEEL MODELS SSF AND SSHF

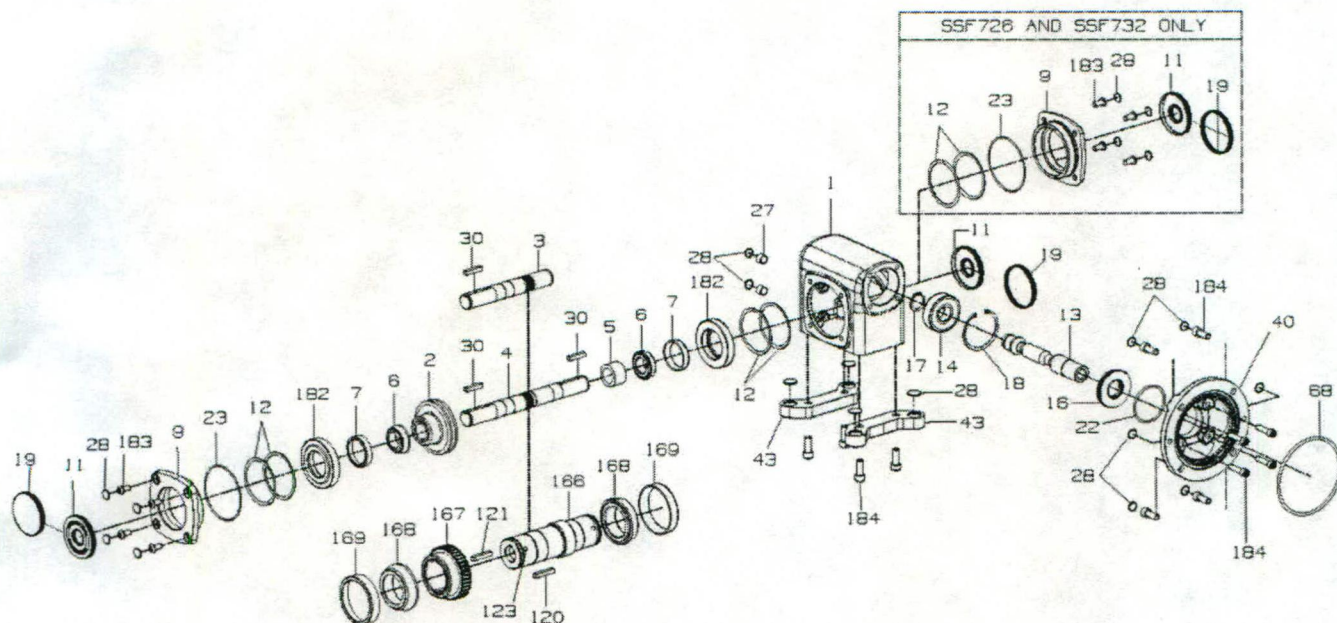

Part No.	Description
1	HOUSING
2	WORM GEAR
3	SINGLE PROJECTING OUTPUT SHAFT
4	DOUBLE PROJECTING OUTPUT SHAFT
5	GEAR SPACER
6	OUTPUT BEARING (CONE)
7	OUTPUT BEARING (CUP)
9	BEARING CARRIER (OPEN)
11	OUTPUT OIL SEAL
12	ADJUSTMENT SHIMS
13	INPUT WORM SHAFT
14	INPUT BEARING
16	INPUT OIL SEAL
17	RETAINING RING (EXTERNAL)
18	RETAINING RING (INTERNAL)
19	BORE PLUG
22	INPUT "O" RING
23	OUTPUT "O" RING
27	PIPE PLUG

Part No.	Description
28	PROTECTIVE CAP PLUG
30	OUTPUT KEY
40	MOTOR FLANGE
43	HORIZONTAL BASE
68	MOTOR FLANGE "O" RING
120	KEY (EXTERNAL)
121	KEY (INTERNAL)
123	SOCKET SETSCREW
166	HOLLOW OUTPUT SHAFT (H) VERSION ONLY
167	WORM GEAR
168	OUTPUT BEARING (CONE)
169	OUTPUT BEARING (CUP)
182	REDUCER BUSHING (MODELS 718 & 721 SOLID SHAFT ONLY)
183	HSBHCS
184	SHCS

Oil Capacity	
Unit Size	Fluid Oz.
SSF718	11.2
SSHF718	10.5
SSF721	16.3
SSHF721	15.2
SSF726	32.9
SSHF726	31.1
SSF732	71.4
SSHF732	67.4

700 Series Single Reduction Catalog Number Explanation


HQC 7 32 R - 30 Z F P - B7 H 3 - P20 700 SERIES STYLE Blank - Projecting I/P & O/P shafts (No flange) H - Projecting I/P, BostMount hollow O/P shaft, (No flange) S - Projecting I/P, hollow O/P shaft (No flange) F - Flanged reducer (Quill type), projecting O/P shaft HF - Flanged reducer (Quill type), BostMount hollow O/P shaft SF - Flanged reducer (Quill type), hollow O/P shaft QC - Flanged reducer (Coupling type), projecting O/P shaft HQC - Flanged reducer (Coupling type), BostMount hollow O/P shaft RF - Flanged reducer (Coupling type), Projecting O/P shaft, 752-760 sizes only SSF* - Stainless Flanged reducer (Quill type), Projecting O/P shaft SSH* - Stainless flanged reducer (Quill type) BostMount hollow O/P shaft C Prefix - Cast iron flange and base (* SSF/SSH sizes 718, 721, 726, 732 only)	CENTER DISTANCE (inches) 10 - 1.00 13 - 1.33 15 - 1.54 18 - 1.75 21 - 2.06 24 - 2.38 26 - 2.62 30 - 3.00 32 - 3.25 38 - 3.75 52 - 5.16 60 - 6.00	REDUCTION RATIO TO 1 5 10 15 20 25 30 40 50 60	FAN (732-760 sizes only) Blank - No fan F - Fan kit	LUBRICATION Blank - No Lube Z - PosiVent® (factory filled with Klubersynth UH1 6-460) K - Klubersynth UH1 6-460	H SERIES OUTPUT BORE CODE For H700 Series only. Specified in 1/16" increments. See Worm Gear Drives Catalog for complete offering. Example: 1-1/4" = P20																												
BASE Blank - No base kit required A - Horizontal base - Worm under B - Horizontal base - Worm over C - Vertical High base - I/P right D - Vertical Low base - I/P right E - Vertical High base - I/P left F - Vertical Low base - I/P left R/L - BostMount Output Bracket X - Input Vertical Up Y - Input Vertical Down V - Hollow O/P with base - I/P left W - Hollow O/P with base - I/P right M - Hollow O/P with CFA-I/P left N - Hollow O/P with CFA-I/P right		NEMA MOUNTING <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>BORE CODE</th> <th>NEMA MOUNTING</th> <th>INPUT BORE</th> <th>KEYWAY</th> </tr> </thead> <tbody> <tr> <td>B4</td> <td>42CZ</td> <td>.500"</td> <td>1/8 x 1/16</td> </tr> <tr> <td>B5</td> <td>56C</td> <td>.625</td> <td>3/16 x 3/32</td> </tr> <tr> <td>B7</td> <td>140TC/180C</td> <td>.875</td> <td>3/16 x 3/32</td> </tr> <tr> <td>B9</td> <td>180TC/210C</td> <td>1.125</td> <td>1/4 x 1/8</td> </tr> <tr> <td>B11</td> <td>210TC/250UC</td> <td>1.375</td> <td>5/16 x 5/32</td> </tr> <tr> <td>B13</td> <td>250TC</td> <td>1.625</td> <td>3/8 x 3/16</td> </tr> </tbody> </table>		BORE CODE	NEMA MOUNTING	INPUT BORE	KEYWAY	B4	42CZ	.500"	1/8 x 1/16	B5	56C	.625	3/16 x 3/32	B7	140TC/180C	.875	3/16 x 3/32	B9	180TC/210C	1.125	1/4 x 1/8	B11	210TC/250UC	1.375	5/16 x 5/32	B13	250TC	1.625	3/8 x 3/16	MOUNTING POSITIONS Blank - No Lubrication Supplied For Factory Prelubrication Indicate Mounting Position 1 - Standard Mounting 2-6 - Refer to Mounting Positions in Catalog	OUTPUT SHAFT ASSEMBLY (When facing Input) G* - O/P Projection - Left H* - Double O/P Projection J* - O/P Projection - Right * Add "S" after letter for Stainless Steel Shaft (ex. GS, HS, JS)
BORE CODE	NEMA MOUNTING	INPUT BORE	KEYWAY																														
B4	42CZ	.500"	1/8 x 1/16																														
B5	56C	.625	3/16 x 3/32																														
B7	140TC/180C	.875	3/16 x 3/32																														
B9	180TC/210C	1.125	1/4 x 1/8																														
B11	210TC/250UC	1.375	5/16 x 5/32																														
B13	250TC	1.625	3/8 x 3/16																														

700 Series Double Reduction Catalog Number Explanation

HQCWA 7 26 B 100 Z F P - B5 H 3 - P20 700 SERIES STYLE WA - Parallel shafts, projecting I/P & O/P HWA - Parallel shafts, projecting I/P, BostMount Hollow O/P SWA - Parallel shafts, projecting I/P, hollow O/P WC - Right Angle shafts, projecting I/P & O/P HWC - Right Angle shafts, projecting input, BostMount hollow output shaft SWC - Right Angle shafts, projecting I/P, hollow O/P FWA - Parallel shafts, Quill type I/P, projecting O/P HFWA - Parallel shafts, Quill type I/P, BostMount Hollow O/P SFWA - Parallel shafts, Quill type I/P, hollow O/P FWC - Right Angle shafts Quill type I/P, projecting O/P HFWC - Right Angle shafts, Quill type input, BostMount hollow output shaft SFWC - Right Angle shafts, Quill type I/P, hollow O/P QCWA - Parallel shafts, Coupling type I/P, projecting O/P HQCWA - Parallel shafts, Coupling type I/P, BostMount hollow O/P QCWC - Right Angle shafts, Coupling type I/P, projecting O/P HQCWC - Right Angle shafts, Coupling type input, BostMount hollow output shaft C Prefix - Cast iron flange and base	CENTER DISTANCE (inches) 13 - 1.33 18 - 1.75 21 - 2.06 26 - 2.62 30 - 3.00 32 - 3.25 38 - 3.75 52 - 5.16 60 - 6.00	REDUCTION RATIO TO 1 100 1200 150 1800 200 2000 300 2400 400 3000 600 3600 900	FAN (732 - 760 only) Blank - No Fan F - Fan Kit E - End Cap available 732 and 738 only, when no fan is used	LUBRICATION Blank - No Lube Z - PosiVent® (factory filled with Klubersynth UH1 6-460) K - Klubersynth UH1 6-460	BASE Blank - No base kit required A & B - Horizontal bases C & E - Vertical High bases D & F - Vertical Low bases R/L - BostMount Output Bracket X - Input Vertical Up Y - Input Vertical Down V/W - Hollow O/P with base M/N - Hollow O/P with CFA	NEMA MOUNTING <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>BORE CODE</th> <th>NEMA MOUNTING</th> <th>INPUT BORE</th> <th>KEYWAY</th> </tr> </thead> <tbody> <tr> <td>B4</td> <td>42CZ</td> <td>.500"</td> <td>1/8 x 1/16</td> </tr> <tr> <td>B5</td> <td>56C</td> <td>.625</td> <td>3/16 x 3/32</td> </tr> <tr> <td>B7</td> <td>140TC/180C</td> <td>.875</td> <td>3/16 x 3/32</td> </tr> <tr> <td>B9</td> <td>180TC/210C</td> <td>1.125</td> <td>1/4 x 1/8</td> </tr> </tbody> </table>	BORE CODE	NEMA MOUNTING	INPUT BORE	KEYWAY	B4	42CZ	.500"	1/8 x 1/16	B5	56C	.625	3/16 x 3/32	B7	140TC/180C	.875	3/16 x 3/32	B9	180TC/210C	1.125	1/4 x 1/8	OUTPUT SHAFT ASSEMBLY (When facing Input) G* - O/P Projection - Left H* - Double O/P Projection J* - O/P Projection - Right * Add "S" after letter for Stainless Steel Shaft (ex. GS, HS, JS)	H SERIES OUTPUT BORE CODE* For H700 Series only. Specified in 1/16" increments See Worm Gear Drives Catalog for complete offering. Example: 1-1/4" - P20 *H Series Only
BORE CODE	NEMA MOUNTING	INPUT BORE	KEYWAY																									
B4	42CZ	.500"	1/8 x 1/16																									
B5	56C	.625	3/16 x 3/32																									
B7	140TC/180C	.875	3/16 x 3/32																									
B9	180TC/210C	1.125	1/4 x 1/8																									
MOUNTING POSITIONS Blank - No Lubrication Supplied For Factory Prelubrication Indicate Mounting Position 1 - Standard Mounting 2 - 6 - Refer to Mounting Positions in Catalog		MOUNTING POSITIONS Blank - No Lubrication Supplied For Factory Prelubrication Indicate Mounting Position 1 - Standard Mounting 2 - 6 - Refer to Mounting Positions in Catalog																										

Note: Contact factory for other model numbers.

Stainless Steel 700 Series Single Reduction Catalog Number Explanation

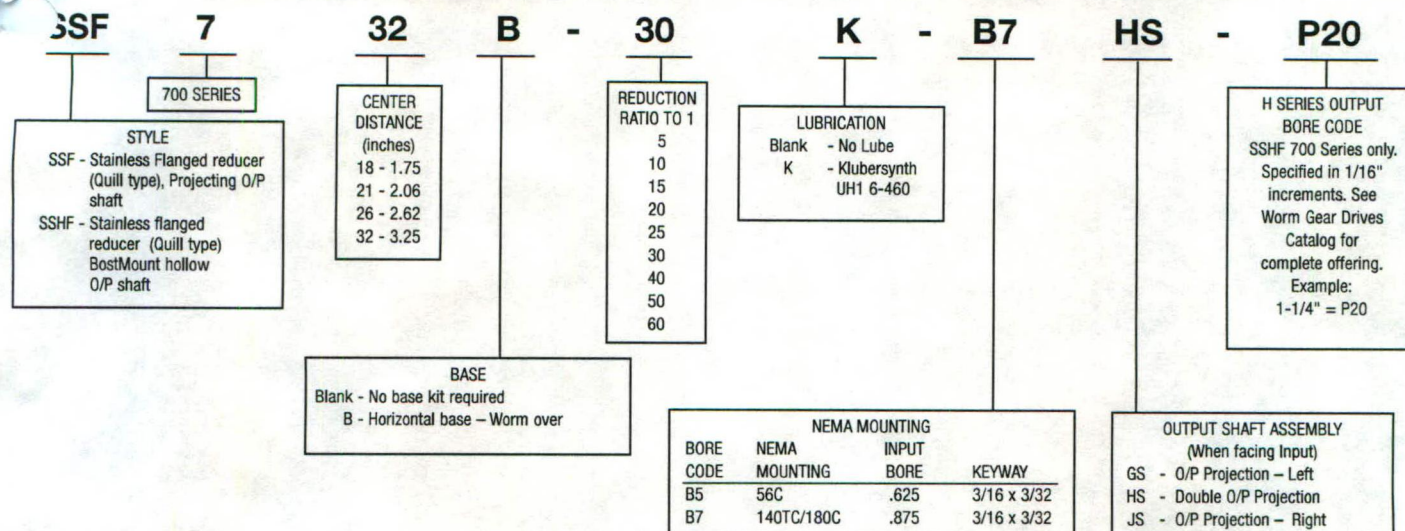

Warranty

The Company warrants that all 700 Series speed reducers will be free from defects in material and workmanship over the lifetime of the product.

Oil seals are considered to be replaceable maintenance items.

Any products which shall be proved to the Company's satisfaction to have been defective at the time of delivery in these respects will be replaced or repaired by the Company at its option. Freight is the responsibility of the customer. The Company's liability under this warranty is limited to such replacement or repair and it shall not be held liable in any form of action for direct or consequential damages to property or person. THE FOREGOING WARRANTY IS EXPRESSLY MADE IN LIEU OF ALL OTHER WARRANTIES WHATSOEVER, EXPRESS, IMPLIED AND STATUTORY AND INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. No employee, agent, distributor, or other person is authorized to give additional warranties on behalf of Boston Gear, nor to assume for Boston Gear any other liability in connection with any of its products, except an officer of Boston Gear by a signed writing.



Boston Gear
14 Hayward Street, Quincy, MA 02171
617.328.3300 fax 617.479.623
www.bostongear.com
An Altra Industrial Motion Company