




Simple Solutions for Poultry Processing

LIQUID FILTRATION SYSTEM

LFS-116

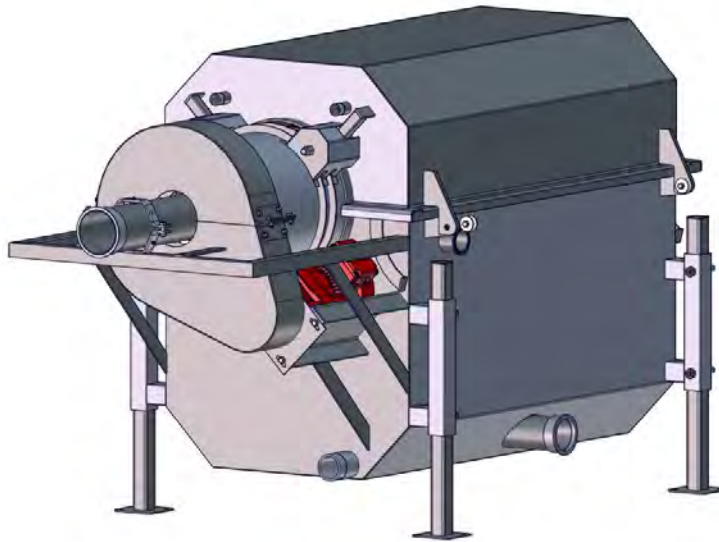

Wayne Farms
Union Springs, AL
USA

Sale Order #
74458S
Serial Number:
SN7928

Safety Instructions & Technical Manual

Prepared by: Angie Duval

UPDATE 06/10/20 BY ASHLEY WALTER

1	General Information
2	Operations and Instructions
3	Sanitation
4	Maintenance and Troubleshooting
5	Assembly Drawings
6	Controls and Electrical Schematics
7	Spare Parts
8	Technical Part Information

GENERAL INFORMATION INDEX

Sales Brochure.....	Page 4
Safety.....	Page 6
Safety Guidelines.....	Page 7
Equipment Training Record.....	Page 8
Limited Warranty.....	Page 9
USDA Compliance Letter.....	Page 10



2000 E. Fulton Street
Columbus, OH 43205 USA



Please call
+1 (614) 253-8590



Send us an email
Sales@PrimeEquipmentGroup.com



More info
PrimeEquipmentGroup.com

GENERAL INFORMATION

SALES BROCHURE

WATER SCREENING AND REUSE SYSTEMS

Models: LFS-112, -116, -125
AND LPS-112-TS



LFS-112 Separator



LFS-116 Screen View



LFS-112 System

Prime water screening and re-use systems remove solid particles greater than .008 inches (200 microns) in size, in volumes ranging from 50-750 GPM. A typical system includes a first-stage rotating stainless-steel wedgewire drum screen for larger particles, and second-stage vertical filters for finer particles. Additionally, Prime can customize systems to meet any plant need.

See Prime in action: View
www.PrimeEquipmentGroup.com/videos

Viewing online?
Click here

COMMON PROCESS WATER RE-USE SOURCES

BIRD WASHER (IOBW)
RINSE CABINETS
BIRD SCRUBBER
HOCK SCRUBBERS

CHILLER OVERFLOW
BIRD SCALDER
PAW PICKER SCALDER
AND MORE



LFS-112 Screen
with Collection System

PRIME ROI:

REDUCE OVERALL WATER CONSUMPTION THROUGHOUT PLANT
REDUCE WATER TREATMENT COSTS
IMPROVE FACILITY EFFICIENCIES AND SUSTAINABILITY
PROGRAMS



2000 E. Fulton Street
Columbus, OH 43205 USA



Please call
+1 (614) 253-8590



Send us an email
Sales@PrimeEquipmentGroup.com



More info
PrimeEquipmentGroup.com


GENERAL INFORMATION

SALES BROCHURE

WATER SCREENING AND REUSE SYSTEMS

Models: LFS-112, -116, -125
AND LPS-112-TS

DMP 200 GALLON LIQUID FILTRATION SYSTEM (MODEL LFS-112)

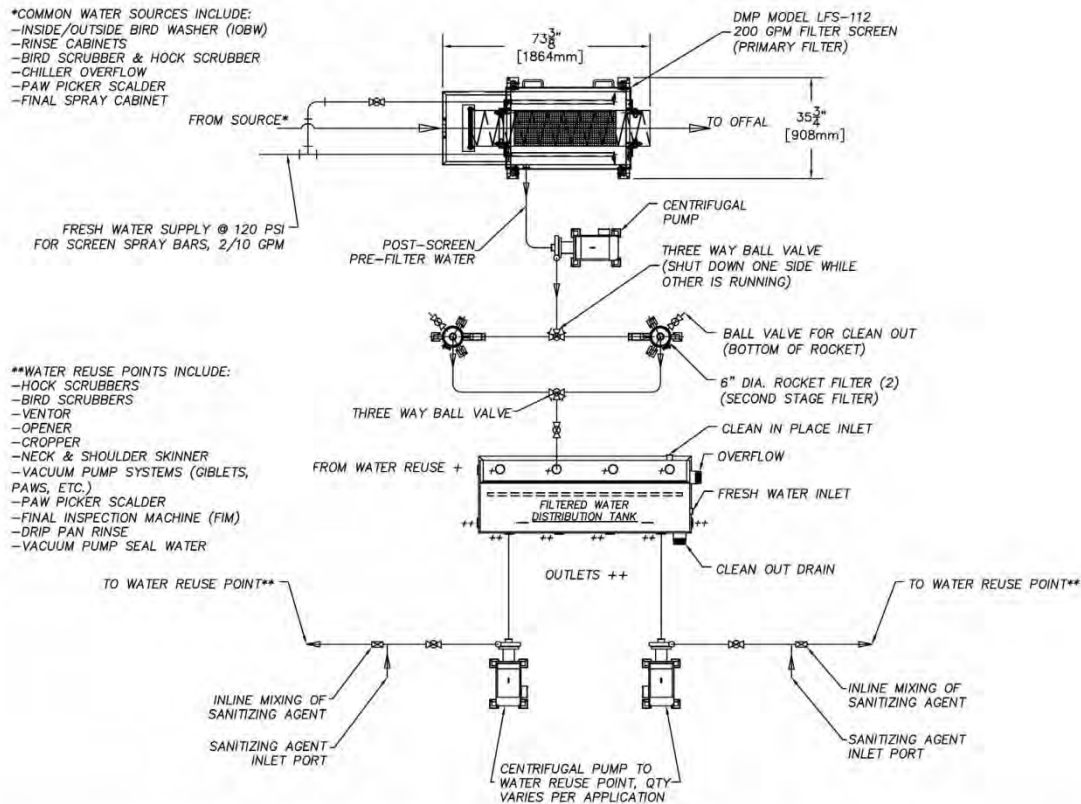

TECHNICAL SPECIFICATIONS

UNIT CAPACITIES

Electrical Requirements:	(1) 1/4 hp motor, 230 OR 460V, 3 PH, 60 Hz (LFS-125: 2 hp 208/230/460 V, 3 PH, 60 Hz)	Capacity - LFS-112:	Up to 200 GPM
Water Specifications:	(2) 3/4" connections, 200 PSI minimum	Capacity - LFS-116:	Up to 300 GPM
Pump Requirements - LFS-109:	(1) 15 hp sanitary pump, 230/460V, 3 ph, 60 Hz	Capacity - LFS-125:	Up to 750 GPM
Pump Requirements - LFS-112:	(1) 15 hp sanitary pump, 208/230/460V, 3 ph, 60 Hz		
Pump Requirements - LFS-116:	(1) 15 hp sanitary pump, 208/230/460V, 3 ph, 60 Hz		
Pump Requirements - LFS-125:	(2) 20 hp sanitary pump, 230/460V, 3 ph, 60 Hz		

GENERAL INFORMATION

SAFETY



DANGER!

WARNING!

All operations, maintenance and sanitation personnel **MUST** read and understand this manual and become familiar with the equipment before operating, maintaining or sanitizing.

Operators **MUST REMOVE** all **RINGS, WATCHES, NECKTIES, LOOSE GARMENTS**, and any other items that might become entangled in the moving parts of the machine. **NO CHAIN MESH GLOVES** should be worn while operating this machine.

Operators **MUST KEEP HANDS AWAY** from the **CUTTING AREA** and any **ROTATING** or **MOVING PARTS** at all times.

This machine is equipped with operating safety interlocks, which must be fully functional at all times. No attempt should ever be made to bypass safeties or run the machine with any guard removed.

Do not attempt to service machine unless power has been disconnected and locked out/ tagged out, and the machine has come to a complete stop.

Note: Exceptions to The Control of Hazardous Energy Source Standard 29 CFR 1910.147 (Lockout/Tagout Standard) are as follows below.

Minor tool changes, adjustments and other minor service activities that take place during normal production are not included in the Lockout/ Tag out Standard provided they are:

- Routine, repetitive and integral to the use of the equipment
- Performed using alternative measures that provide effective protection for the employee

Failure to heed these warnings and comply with the instructions for safe operation of this machine can and will cause serious bodily injury and or death.



2000 E. Fulton Street
Columbus, OH 43205 USA



Please call
+1 (614) 253-8590



Send us an email
Sales@PrimeEquipmentGroup.com



More info
PrimeEquipmentGroup.com

GENERAL INFORMATION

SAFETY GUIDELINES

1. All individuals that will be working on or around this machine must be informed of the following procedures and safety guidelines:
2. All operators and any other employees working around the LFS-116 must be informed of the location and operation of the safeties that are built in to the LFS-116.
 - a. All guards are equipped with safety switches and must be fully operational in order to operate the machine.
 - b. Safety switches should never be by-passed for any reason.
 - c. All operators and any other employees working on or around the LFS-116 must also be informed of the location of the emergency stop buttons. Once the emergency stop button has been pressed the machine will not operate. To restart the machine the emergency button must be reset.
 - d. Proper lock out tag out procedures must be followed at all times during repairs or during sanitation. On occasion product may build up in certain areas during operation; never place your hand in to a pinch point area without the machine being locked out.
3. **In combination with the Equipment Training Record it is the Owners responsibility to train and follow up on all operators of the machine, now and in the future, so that they understand the operating instructions and safety regulations of the LFS-116.**
4. On the following page please find an Equipment Training Record form. Please make one copy for each operator of the LFS-116 to review, complete and sign. Keep for your records.

GENERAL INFORMATION

EQUIPMENT TRAINING RECORD

All individuals that will be working on or around this machine must be informed of the following procedures and safety guidelines:

- All operators working on or around the LFS-116 must be informed of the location and operation of the safeties that are built in to the LFS-116.
- All guards are equipped with Safety switches and must be fully operational in order to operate the machine.
- Safety switches should never be by-passed for any reason.
- All operators working on or around the LFS-116 must be informed of the location of the emergency buttons. Once the emergency stop button has been pressed the machine will not operate. To restart the machine the emergency button must be reset.
- Proper lock out tag out procedures must be followed at all times during repairs or during sanitation. On occasion product may build up in certain areas during operation; never place your hand in to a pinch point area without the machine being locked out.
- All operations of Sanitation and Maintenance personal must be trained in the following areas. Prime Equipment Group recommends you keep a record of personal trained. Prime Equipment Group is also willing to assist with this training. Please feel free to call Prime Equipment Group for additional area.
 - a. Installation and application
 - b. Disassembly and sanitation
 - c. Instruction and parts manual
 - d. Daily periodic maintenance
 - e. Wearing parts
 - f. Assembly and operation
 - g. Safety features and precautions
 - h. Trouble shooting
 - i. Recommended spare parts inventory
 - j. Routine maintenance schedule

GENERAL INFORMATION

LIMITED WARRANTY

Products purchased from Manufacturer are warranted only by the Manufacturer's warranty that the Product provided herein is of their standard quality and operable and that the Product will be free from defects in workmanship and material. The warranty period, for Product sold by Manufacturer and not expressly made subject to a different warranty, is one hundred twenty (120) days from date of receipt by Customer. There is no insurance against or warranty of any type for production loss due to late or damaged Product shipments. The Manufacturer makes no express or implied statutory warranties other than as expressly set forth herein.

Manufacturer shall for a period of one hundred twenty (120) days from the date any Product sold hereunder is received by Customer, repair or replace at its option, free of charge and F.O.B. point of manufacture, any nonconforming or defective parts or Product that upon inspection by Manufacturer, are deemed to be nonconforming or defective. Manufacturer shall, however, only be required to repair or replace such parts or Products if Customer (i) owned the nonconforming or defective parts or Product continuously from the original date of delivery, (ii) stored and maintained such parts and Product in accordance with Manufacturer's recommendations and standard industry practices and (iii) notified Manufacturer in writing of any nonconformance or defective parts or Product within fifteen (15) days following the date the nonconformity or defect became reasonably apparent. Further the obligations of Manufacturer hereunder do not apply to the repair or replacement of Products within the aforementioned warranty period for (a) misuse, negligence or accident, (b) normal maintenance services, (c) normal replacement of service items in connection with such service, (d) normal deterioration due to wear and tear, (e) use of non-manufacturer (OEM) replacement parts. The remedy provided in this Warranty shall be the sole and exclusive remedy of Customer in the event of defective or nonconforming parts or Product, and shall be void if the Product has been altered in any manner or has been moved from its original location without the written approval of the Manufacturer. The repair or replacement of any parts or Products

under the foregoing provision does not extend the warranty beyond the warranty period described above. All electric motors, controls and other electrical services and their component parts, hydraulic motors, controls and other hydraulic services and their component parts, pneumatic controls, pneumatic services and other pneumatic components, bearings, gearboxes etc. are not included within this Warranty; the warranty with respect to these parts being limited to the manufacturer of these parts, a copy of which may be obtained from Manufacturer upon request. Customer will be responsible for the shipping/packaging costs associated with the safe and expedient return of warranted parts. The Warranty can only be claimed if genuine Manufacturer spare parts are used for repairs and maintenance of the Product.

MANUFACTURER'S UNDERTAKINGS AS CONTAINED IN THIS WARRANTY AS SPECIFIED ABOVE SHALL BE IN LIEU OF ANY OTHER GUARANTY OR WARRANTY, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE. IN ADDITION, IT IS EXPRESSLY AGREED BETWEEN THE PARTIES THAT THE MANUFACTURER HAS NOT MADE ANY REPRESENTATIONS OR WARRANTY AND THERE IS NO AGREEMENT THAT THE PRODUCT PURCHASED HEREUNDER WILL MEET ANY PARTICULAR STANDARD UNLESS CUSTOMER HAS SUPPLIED MANUFACTURER WITH WRITTEN SPECIFICATIONS OF THE PRODUCT AND THE MANUFACTURER HAS AGREED IN WRITING THAT THE PRODUCT WILL MEET SPECIFIC STANDARDS SPECIFIED BY THE CUSTOMER. CUSTOMER UNDERSTANDS AND ACKNOWLEDGES THAT THERE ARE NO WARRANTIES WHICH EXTEND BEYOND THE TERMS HEREOF UNLESS OTHERWISE NOTED IN PURCHASE AGREEMENT.

NO CLAIM OF ANY KIND, INCLUDING, BUT NOT LIMITED TO CLAIMS OF NEGLIGENCE AND BREACH OF CONTRACT, WHETHER AS TO PRODUCT DELIVERED OR SERVICES RENDERED OR FOR NON- DELIVERY OF PRODUCT OR NON-PERFORMANCE OF SERVICES SHALL BE GREATER THAN THE PURCHASE PRICE OF THE PRODUCT OR SERVICES IN RESPECT OF WHICH THE CLAIM IS MADE. WITHOUT LIMITING THE FOREGOING, MANUFACTURER'S LIABILITY HEREUNDER SHALL, UNDER NO CIRCUMSTANCES, EXCEED THE PURCHASE PRICE SET FORTH IN THIS QUOTATION. MANUFACTURER SHALL, IN NO EVENT, BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL, INDIRECT OR SPECIAL DAMAGES, LOSS OF BUSINESS PROFIT, PERSONAL INJURY, BUSINESS INTERRUPTION AND LOSS OF BUSINESS, EVEN IF MANUFACTURER HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES AND ANY CLAIM BY CUSTOMER TO SUCH DAMAGES, WHETHER BASED ON TORT, CONTRACT OR OTHERWISE IS HEREBY EXPRESSLY WAIVED AND EXCLUDED.



GENERAL INFORMATION

USDA COMPLIANCE LETTER



2000 E. Fulton St.
Columbus, OH 43205 U.S.A.
Tel: 614.253.8590
Fax: 614.253.6966

www.primeequipmentgroup.com

January 8, 2016

To whom it may concern,

This letter confirms that all materials associated with machines provided by Prime Equipment Group meet all of the requirements and guidelines for safe use in a food processing environment.

Our equipment design meets all USDA rules and regulation and is suitable for use in USDA plants. Please feel free to contact us at any time with questions or concerns.

Sincerely,

A handwritten signature in black ink, appearing to read 'Larry Woodruff', is written over the printed name and title.

Larry Woodruff
Vice President of Operations
Prime Equipment Group
Direct: 614.643.0134
Fax: 614.253.6966



2000 E. Fulton Street
Columbus, OH 43205 USA



Please call
+1 (614) 253-8590



Send us an email
Sales@PrimeEquipmentGroup.com



More info
PrimeEquipmentGroup.com

OPERATIONS AND INSTRUCTIONS INDEX

Introduction.....Page 13

Specifications.....Page 13



2000 E. Fulton Street
Columbus, OH 43205 USA



Please call
+1 (614) 253-8590



Send us an email
Sales@PrimeEquipmentGroup.com



More info
PrimeEquipmentGroup.com

OPERATIONS AND INSTRUCTIONS

INTRODUCTION

The Liquid Reclamation Filtration System is a horizontally mounted cabinet type machine. It includes a stainless steel wedgewire screen drum that rotates to separate the solids from the liquids. The drum rotates, which allows maximum separation or straining of the solids from the liquid. The liquid and solid type solution is injected into the screen drum through an inlet diverter tube or a trough. As the drum rotates, the liquids are "strained" through the screen and the solids are moved by flights out of the discharge end of the drum. High pressure water through the jet spray nozzles will act as cleaners of particles through to the interior of the drum. The cabinet can be adjusted up or down by the leg adjusters. Minimum height of the inlet tube is approximately 36" to 40". The exit end of the machine should be approximately ½" to ¾" higher than the entrance end. This allows for better removal and drier solids. The second stages of filters are vertical pressurized filters. The use of 3 way diverter valves allow the use of one at a time so one can be cleaned while the other is operating, thus no down time for cleaning. They are external fed and internally exited through the top. The top is easily removable and replaced after cleaning.

SPECIFICATIONS

1. Electrical Requirements

- a. Rotary Screen Drive Unit; Eurodrive Gearmotor; 1/3 HP - 230 Volt 3-Phase (Unit Epoxy Filled - Use "Pigtail" Attached) OR
- b. Rotary Screen Drive Unit; Eurodrive Gearmotor; 1/3 HP - 460 Volt 3-Phase; (Unit Epoxy Filled - Use "Pigtail" Attached)
- c. 7.5 HP sanitary pump with (2) diverter valves.
- d. 208/230- 460v 3 phase
- e. NOTE: "Lock Out" - "Tag Out" All Electrical.
- f. Electrical installation and repair to be performed only by a licensed electrician in accordance with manufacturer's specifications, national and local electrical codes.

OPERATIONS AND INSTRUCTIONS

SPECIFICATIONS

2. Water Requirements

- a. 2" Sanitary piping kit to tie into existing line
- b. Use fresh water on spray bars for wash of screen area. High pressure system is needed for this operation. (300 PSI +)
- c. The use of 5002 spray jets allows high pressure spray with minimal fresh water usage. Only 2/10 GPM each.
- d. For other options, please contact your representative.

3. Filtration Requirements

- a. Delrin gear to gear driven rotary screen.
- b. Secondary static cleanable filters (rockets) after pump. (clean at break- no down time)
- c. All screens can be easily removed for sanitation
- d. Self-contained CIP reservoir and pump. (if necessary for your application)
- e. 1/4 HP Sew/Eurodrive epoxy filled "water proof" drive unit.
- f. LFS-116 screen rated for 200 GPM.
- g. Spray bars with 5002 spray jets with fresh high pressure water to clean rotary screen. 15 HP sanitary pump included.
- h. 2- 3 way (diverter) sanitary ball valves included (located between rockets to allow cleaning of rocket screen at any time with no down time).

4. Reuse Specifications

- a. Reuse water lines should be marked as such.
- b. Reuse water lines cannot be connected to potable water lines, thus a system should be in place to change to potable water if reuse system has a failure or breakdown. Establish an ongoing test plan to check chlorine levels and microbiological contents per system or systems used.
- c. CIP or flush through system should be used daily as to keep lines clean and sanitary. Each facility should have an SOP or HACCP plan in place.

Sanitation Procedures.....Page 17



2000 E. Fulton Street
Columbus, OH 43205 USA



Please call
+1 (614) 253-8590



Send us an email
Sales@PrimeEquipmentGroup.com



More info
PrimeEquipmentGroup.com

SANITATION

SANITATION PROCEDURES

1. Turn off the machine before cleaning.
2. Remove all debris
3. Wash with USDA accepted agent to remove biofilm.

(Each official plant is responsible for determining the appropriate type of chemicals and sanitizer that they will be using in their process and maintaining the applicable documentation and support that these items are approved for their intended use. All plants must be able to demonstrate compliance with USDA/FSIS/ 9 CFR 416.4(c): Cleaning compounds, sanitizing agents, processing aids, and other chemicals used by an establishment must be safe and effective under the conditions of use. Such chemicals must be used, handled, and stored in a manner that will not adulterate product or create insanitary conditions. Documentation substantiating the safety of a chemical's use in a food processing environment must be available to FSIS inspection program employees for review.)

4. Rinse with water.
5. **DO NOT** spray water in motor

Scheduled Maintenance.....Page 20



2000 E. Fulton Street
Columbus, OH 43205 USA



Please call
+1 (614) 253-8590



Send us an email
Sales@PrimeEquipmentGroup.com



More info
PrimeEquipmentGroup.com



2000 E. Fulton Street
Columbus, OH 43205 USA



Please call
+1 (614) 253-8590



Send us an email
Sales@PrimeEquipmentGroup.com



More info
PrimeEquipmentGroup.com

MAINTENANCE AND TROUBLESHOOTING

SCHEDULED MAINTENANCE

In order to maintain optimum performance of this machine, the following preventative maintenance schedule should be kept.

1. DAILY (BEFORE EACH SHIFT)

- a. The spray nozzles should be checked to make sure they haven't become clogged and are spraying on the drum to keep it clean.
- b. Rocket filters should be checked for damage or bent areas at time of cleaning.
- c. Make sure all safety covers are in place and fastened.

2. WEEKLY

- a. The drum wheels that the drum rotates on should be checked to assure that the drum is rolling on them and that the bearings are freely turning.
- b. The top drum wheels are "spring loaded" and should be checked to make sure springs are moving freely and bearings are freely turning.
- c. The large and small drive gears should be checked for engagement and chipped or worn teeth.
- d. The rotating drum should be checked on an occasional basis for any damage that could occur to screen area or wear where wheels are rolling.
- e. Replace any worn or broken parts and tighten all loose bolts.








Quantity Explosion of BOM Levels

As of 12/28/16

Prime Equipment Group

ReportName:50172

<u>Level</u>	<u>No.</u>	<u>Description</u>	<u>BOM Qty.</u>	<u>Unit of Measure Code</u>
Item: No.: SN7928				
SN7928	LFS-116 LIQUID FILTRATION SYSTEM, 300 GPM			
1	17315-SN7928	ID PLT	1	EA
1	21994	ASSY,300 GALLON, LFS116	1	EA
1	49915	ROCKET SET,10",3"PIPING,.010	1	EA
1	CDSS025C075	STUD,WLD,FLG,CD,SS,1/4-20X0.75	2	EA
1	SPACER16FW25012	SPCR,1/8T X 1/4 ID X 1/2 OD	2	EA
1	STICKER-1	SAFETY STICKER,CUT FINGERS	2	EA
1	STICKER-3	SAFETY STICKER,GEAR	2	EA

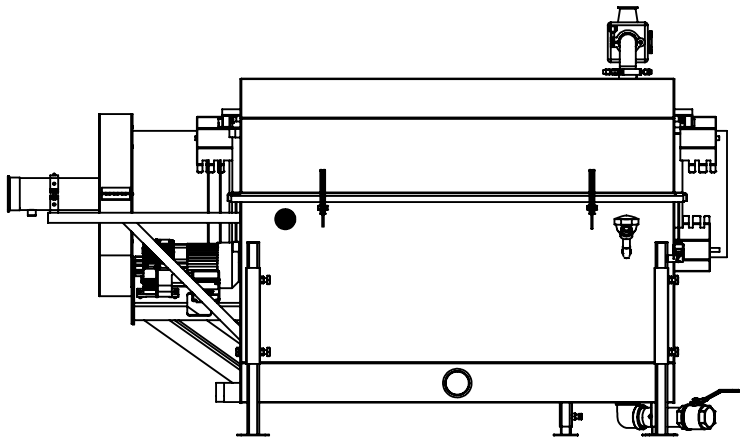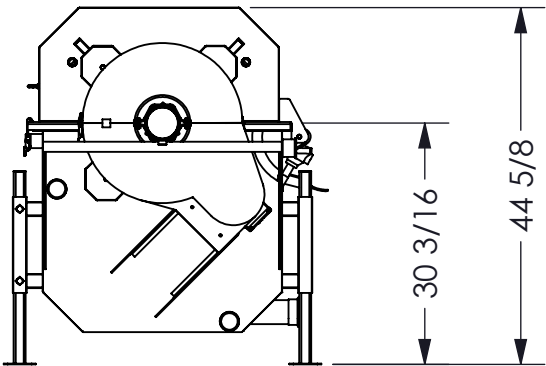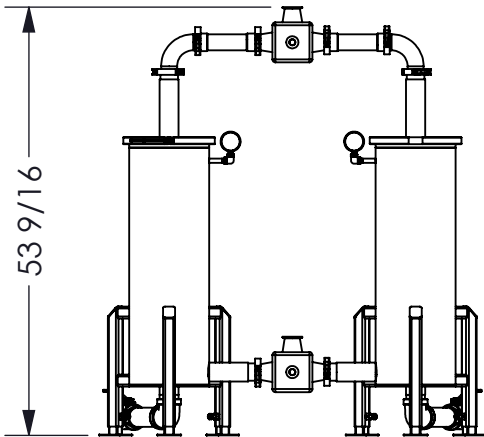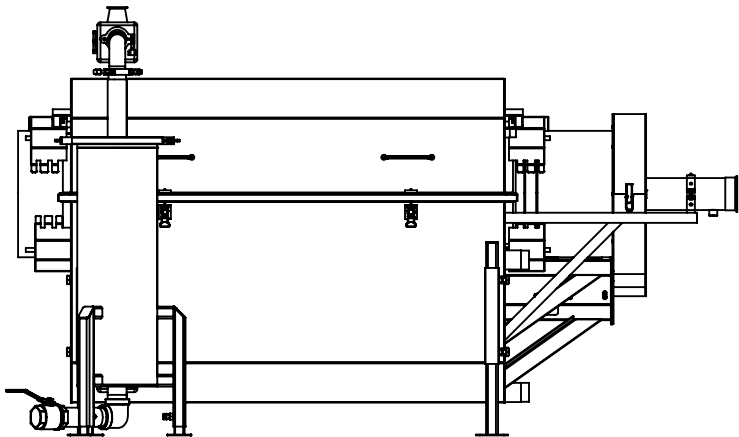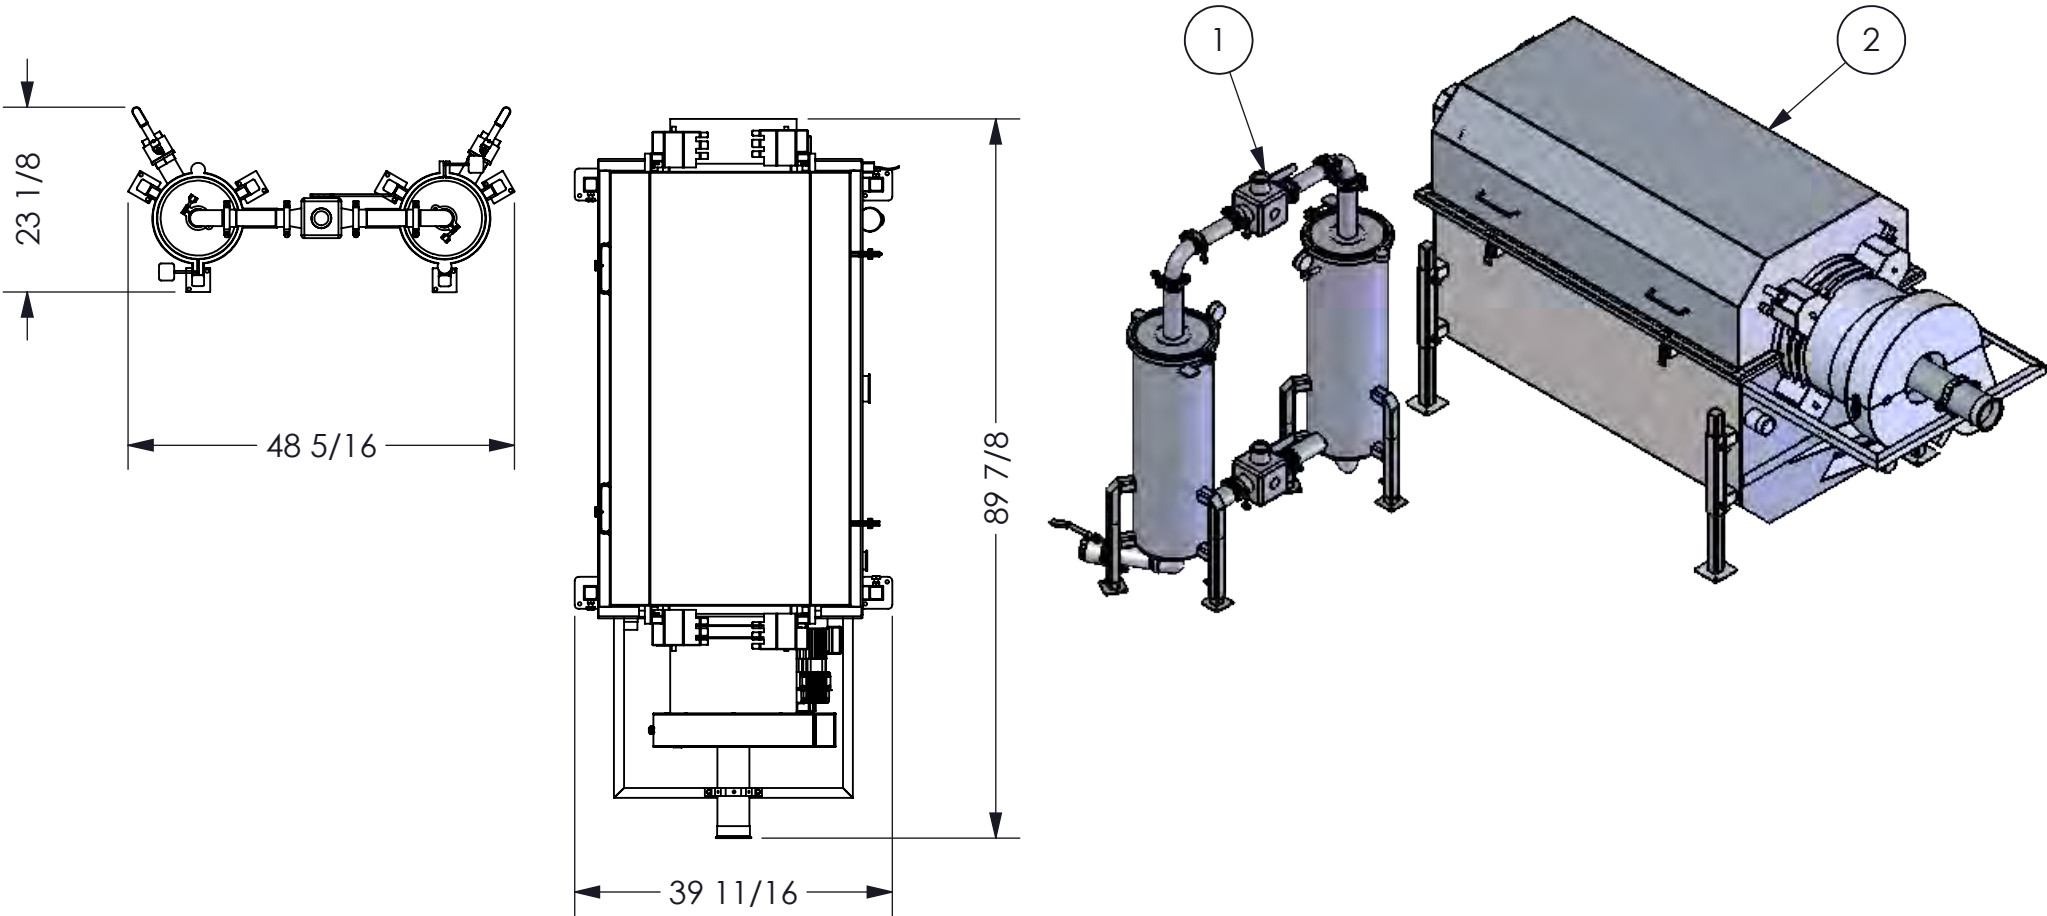

*NOT SHOWN

3	1*	49861	PIPING KIT,LFS-116,300 GPM
2	1	21994	ASSEMBLY,300 GALLON, LFS116
1	1	21340	Canister, Rocket, Complete ASSY, LFS-116
ITEM NO.	QTY.	PART NUMBER	DESCRIPTION

	-	tmeahl	11/1/2016	INITIAL RELEASE
Revision	ECN #	By	Date	Description of Change
Current Revision Information				
DIMENSIONS ARE IN INCHES 1 inch = 25.4 mm			TOLERANCES, UNLESS NOTED X.XX ±0.01 FRACT ±1/16 X.XXX ±0.005 ANGLE ±0.05°	SURFACE FINISH 250 MICROINCH. BREAK ALL SHARP EDGES 0.015. CONCENTRICITY 0.01 TIR.
SPECIFICATIONS UNLESS OTHERWISE NOTED				






PRIME
Equipment Group, Inc.

This document may contain trade secrets and confidential information that is the sole property of Prime Equipment Group, Inc. (Prime). Prime reserves all patent, copyright, trademark and other intellectual property rights in information contained in this document. Recipients of this document are NOT authorized to use, reproduce, copy, disclose or transmit, in whole or in part, the information contained herein without the prior written consent of Prime. All rights reserved. Copyright 2007 Prime Equipment Group, Inc.

Este documento pode conter segredos comerciais e informações confidenciais que é propriedade exclusiva da Prime Equipment

Os destinatários deste documento NÃO são divulgar ou transmitir, no todo ou em parte, consentimento por escrito da Prime. Todos os direitos reservados. Copyright 2007 Prime Equipment Group, Inc.

Material:	SEE BOM/DETAILS SEE BOM/DETAILS	LFS-116 SYSTEM LIQUID FILTRATION SYSTEM, 300 GPM		
Finish:	SEE BOM/DETAILS			
Heat Treat:	SEE BOM/DETAILS	Size	Part Number	Rev.
Drawn By:	tmeahl	B	SN7928	
Created:	11/1/2016	Class: -	SHEET 1 OF 1	

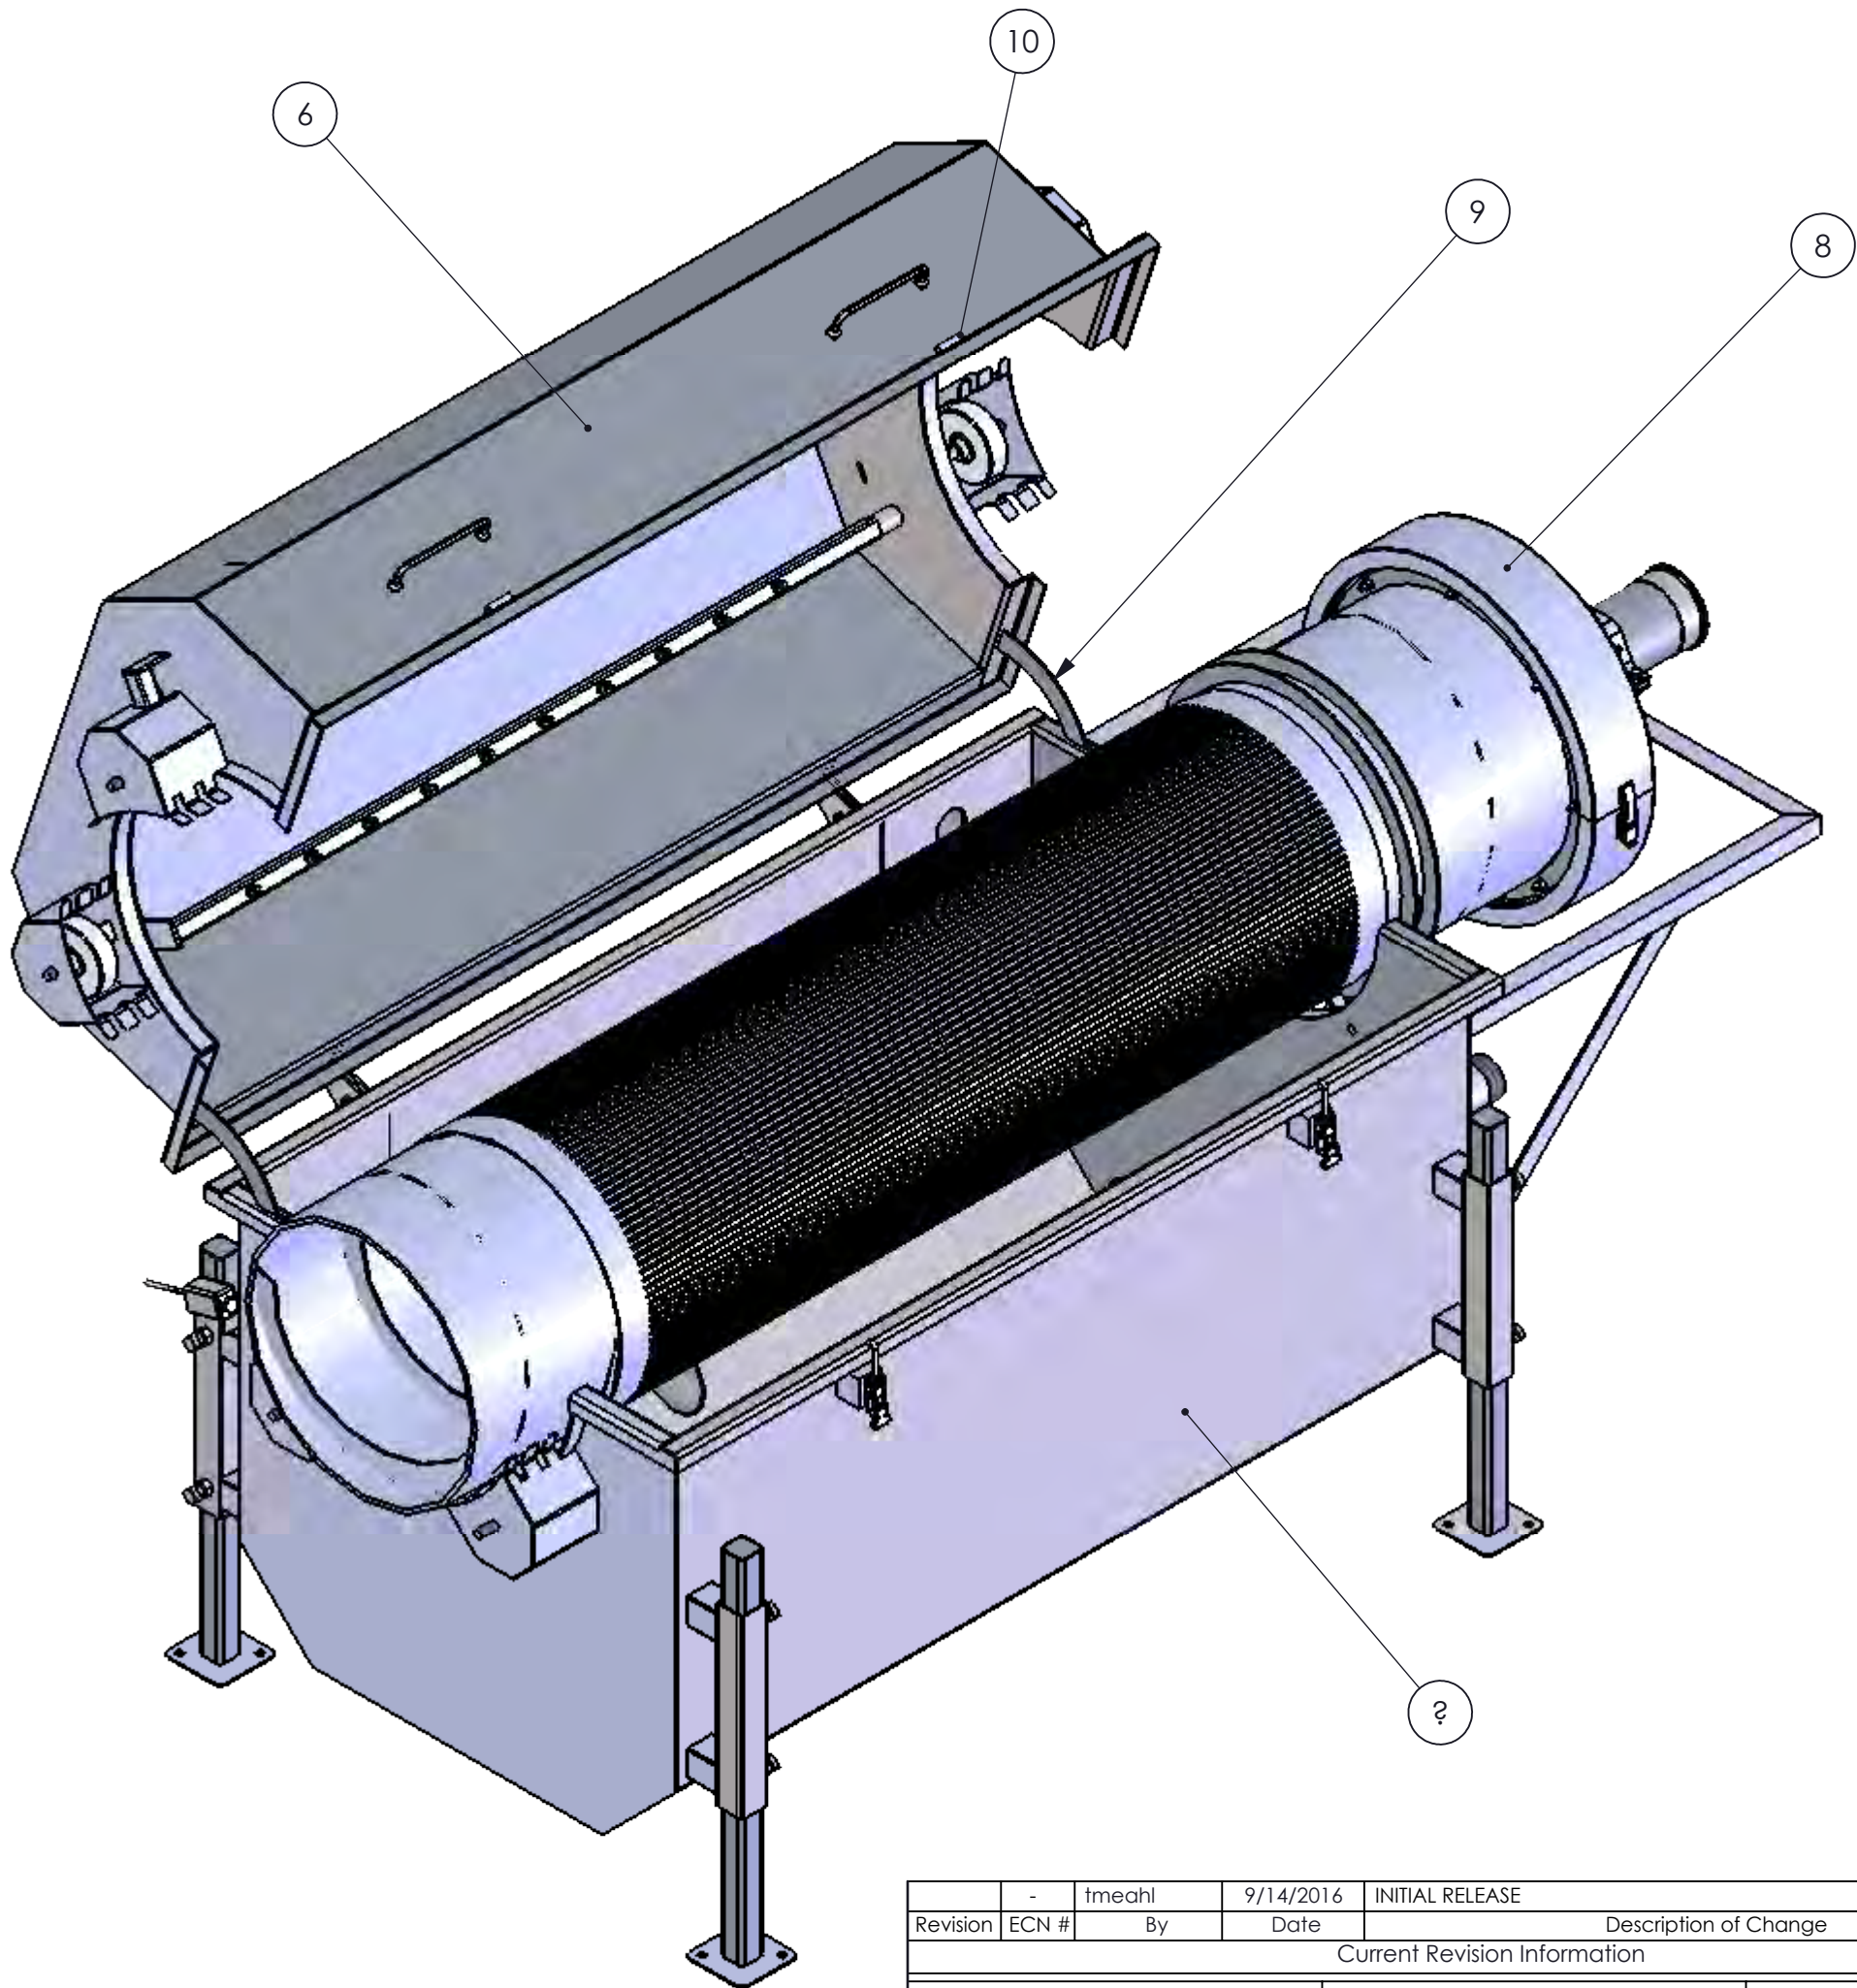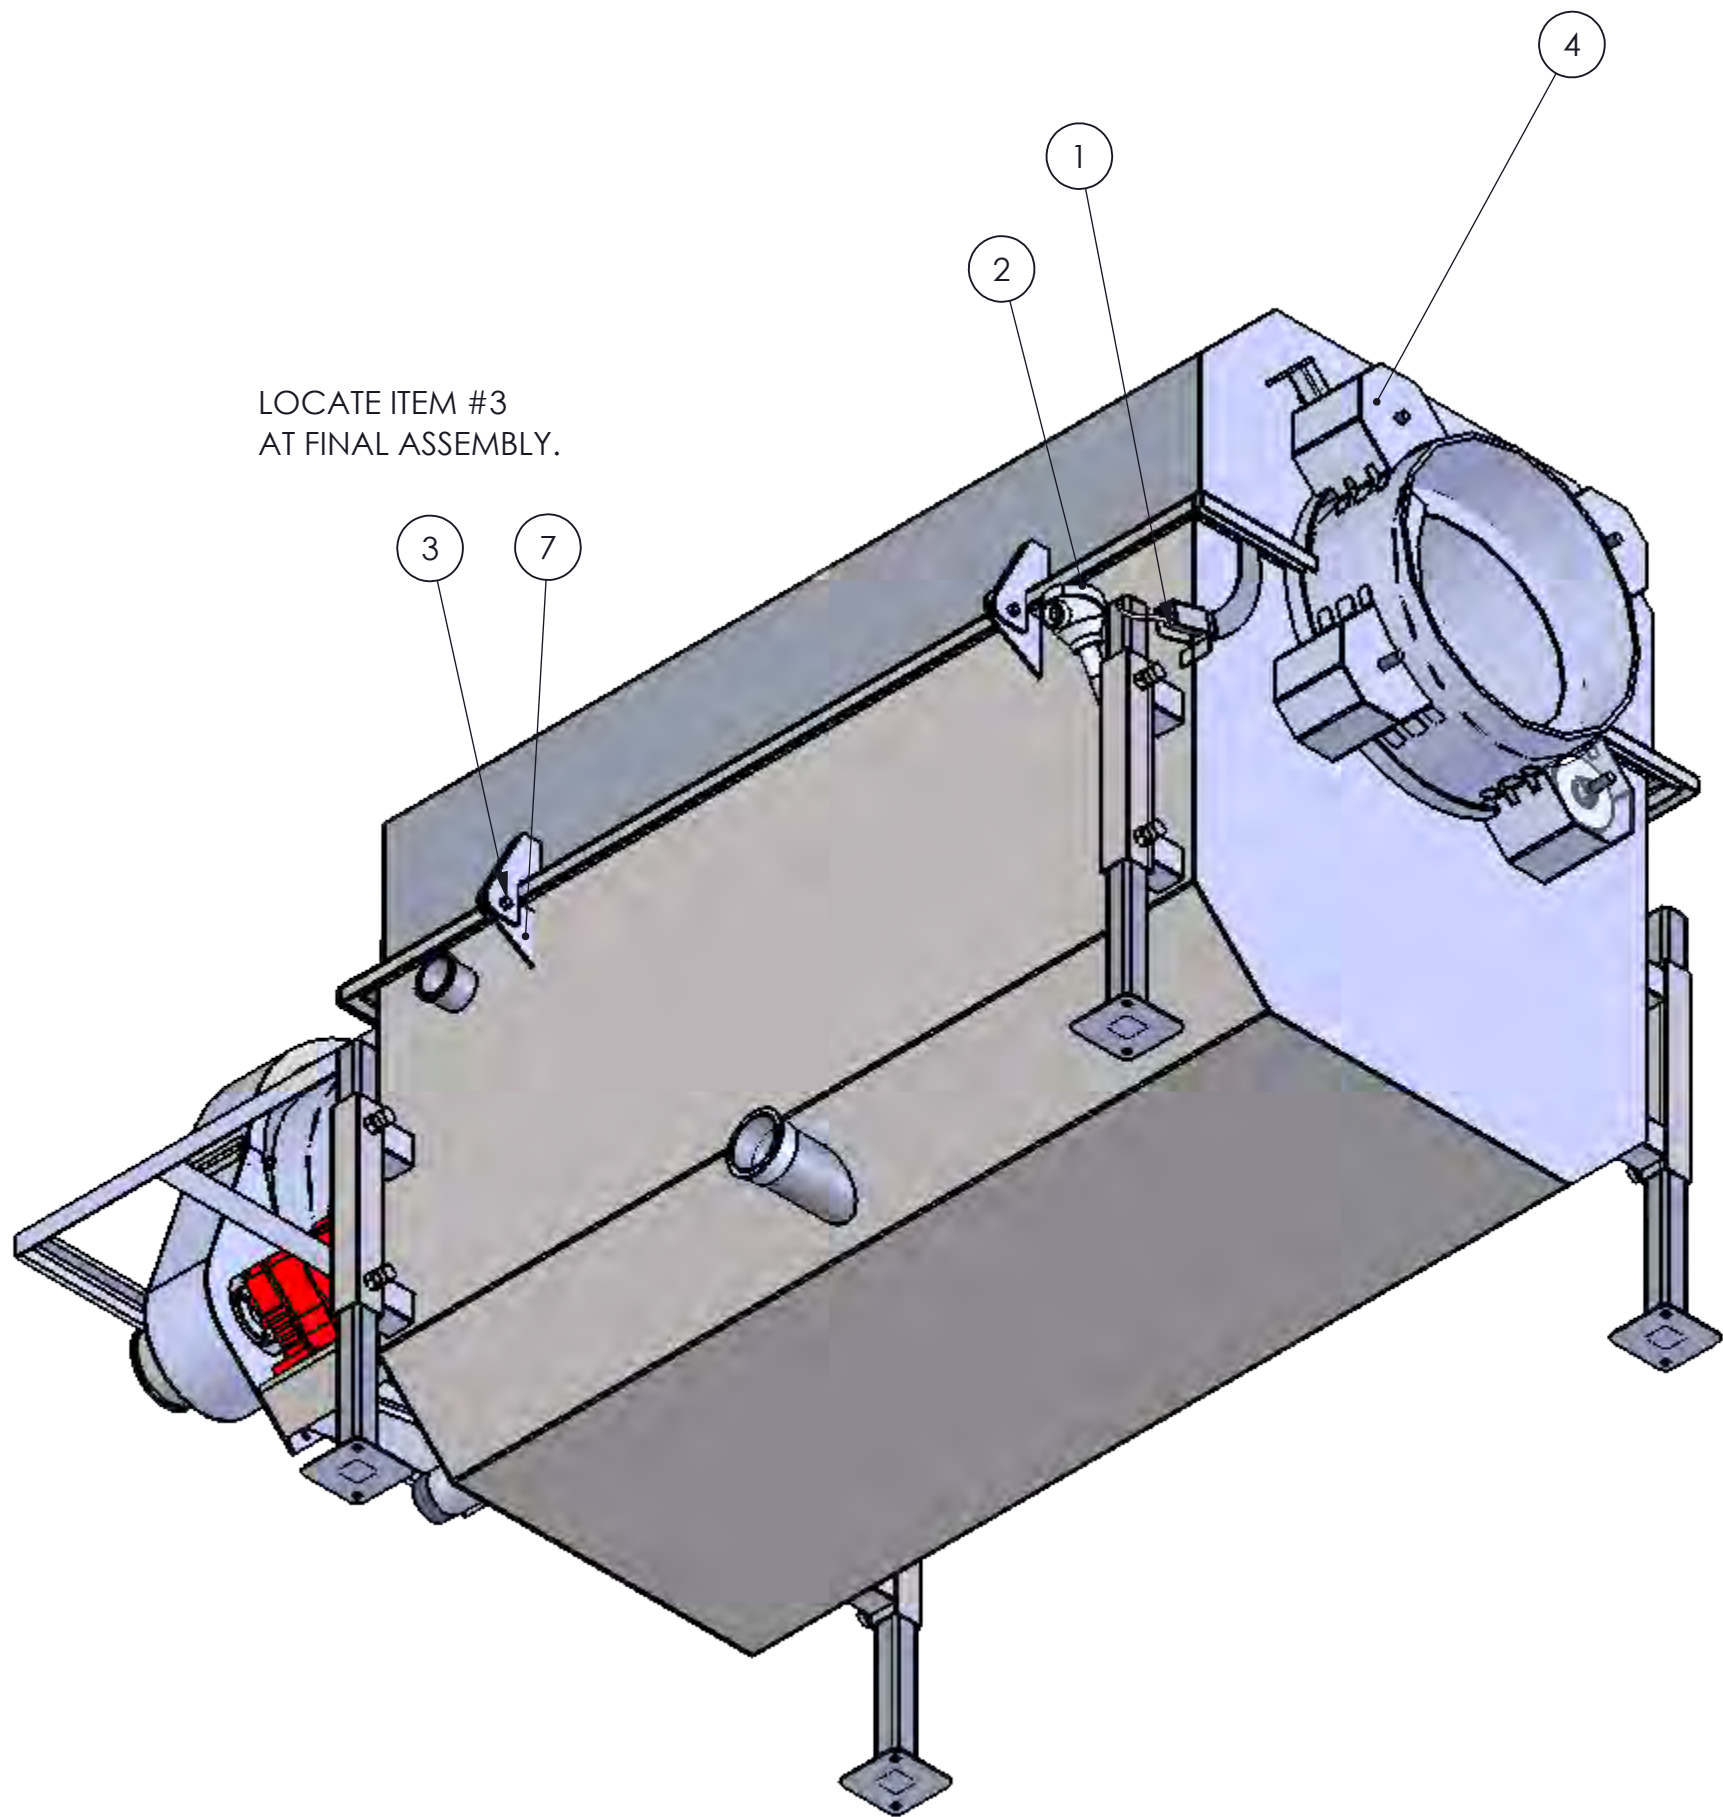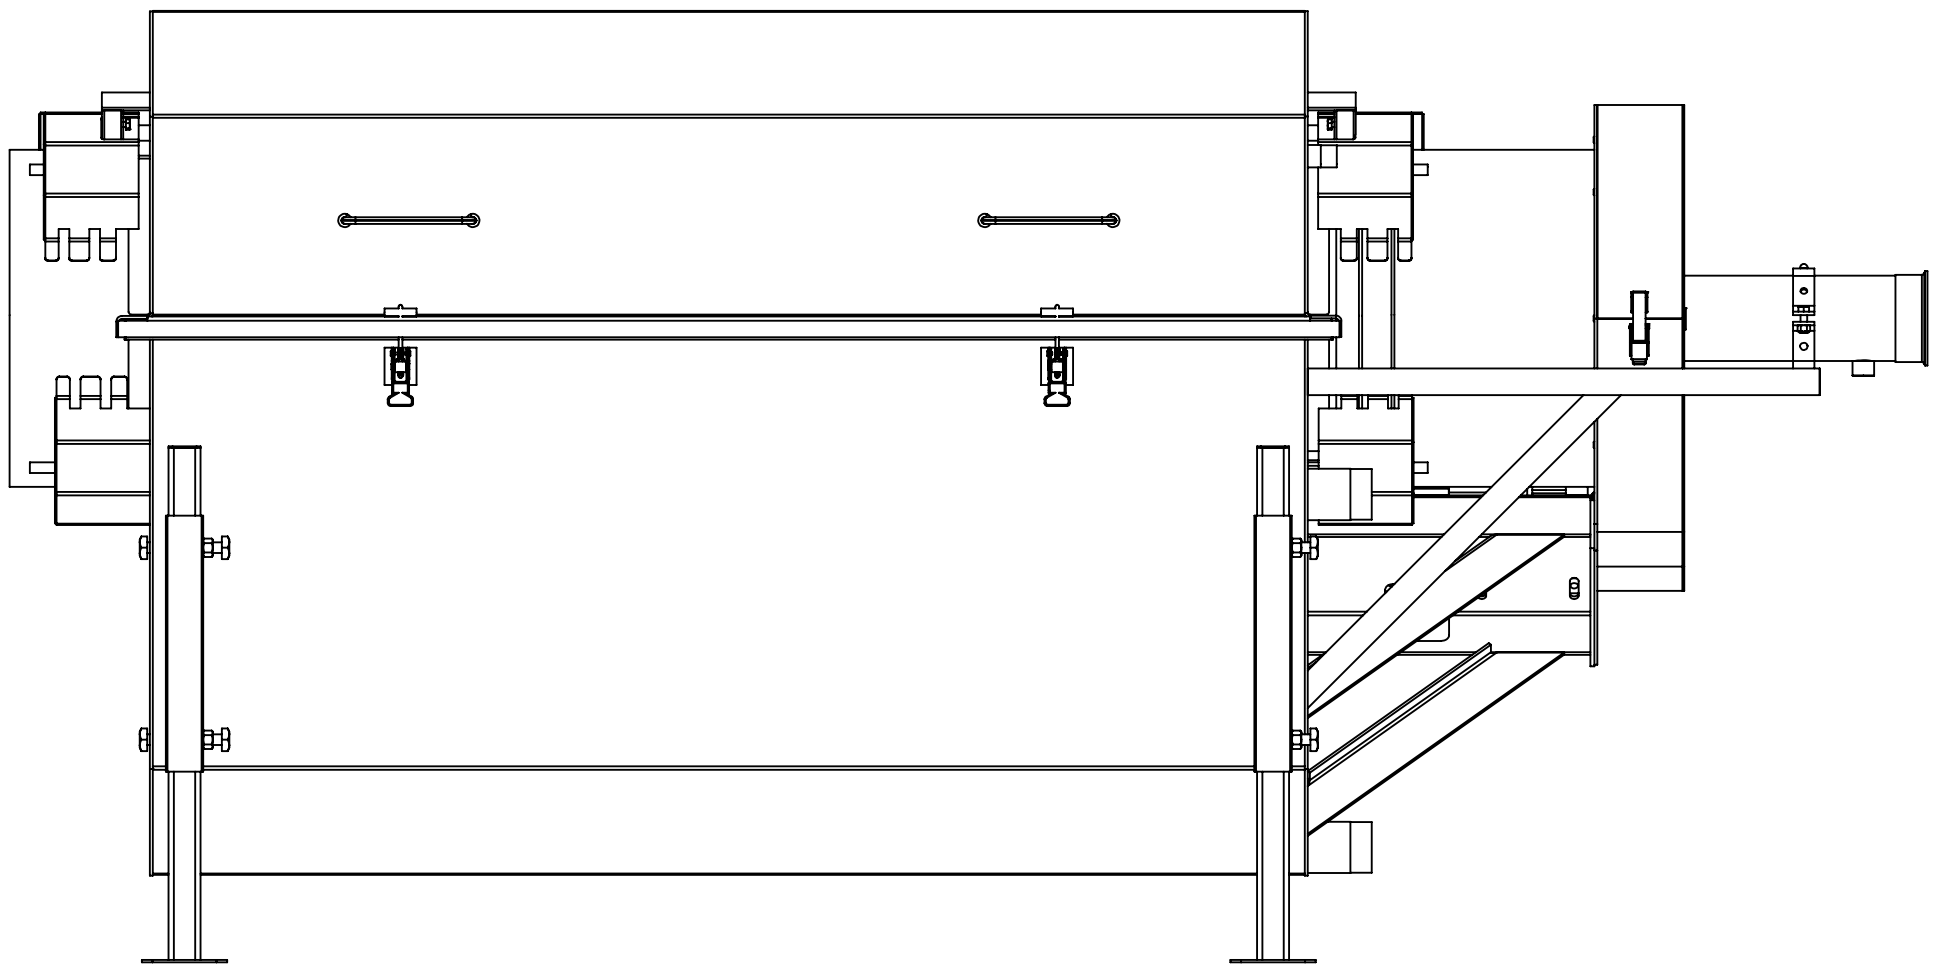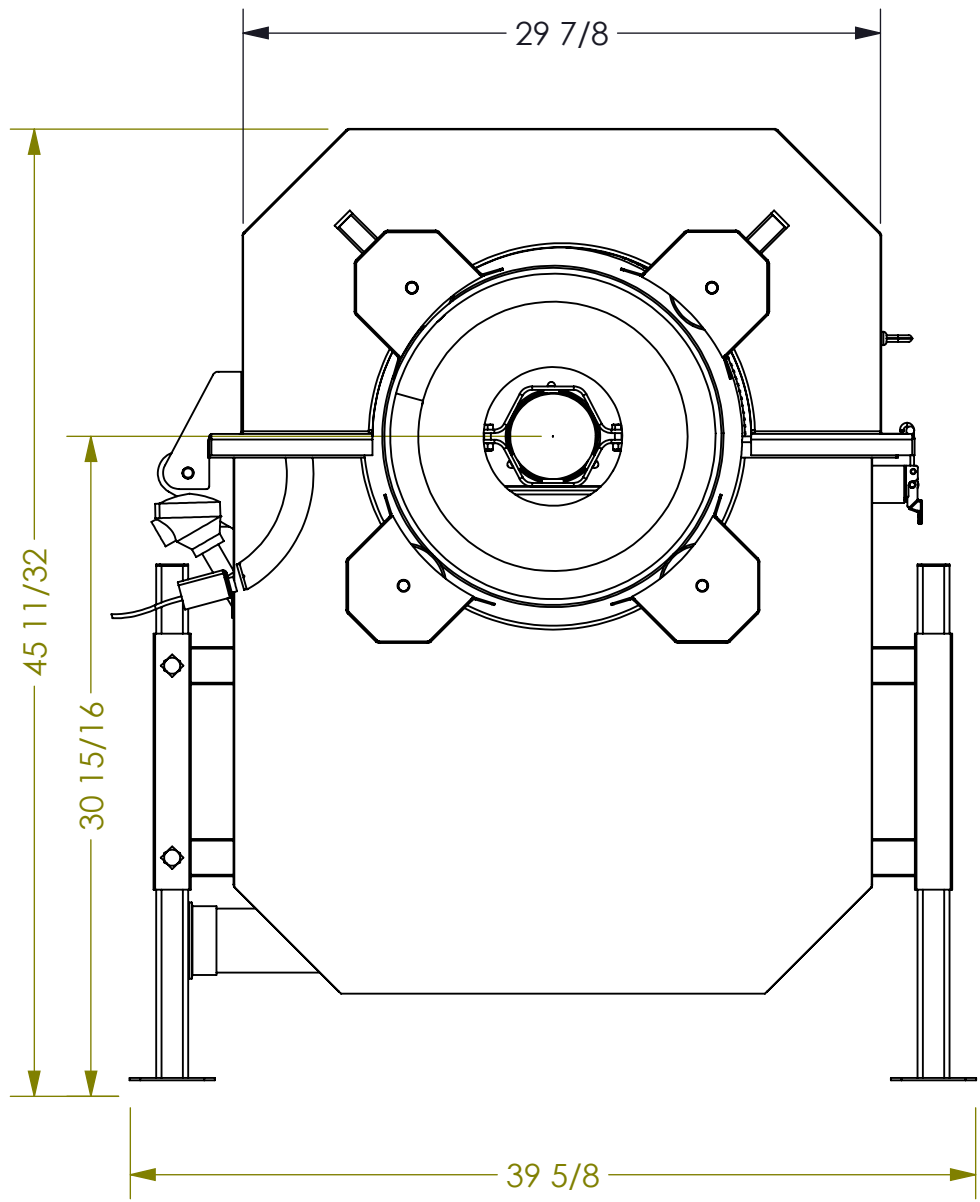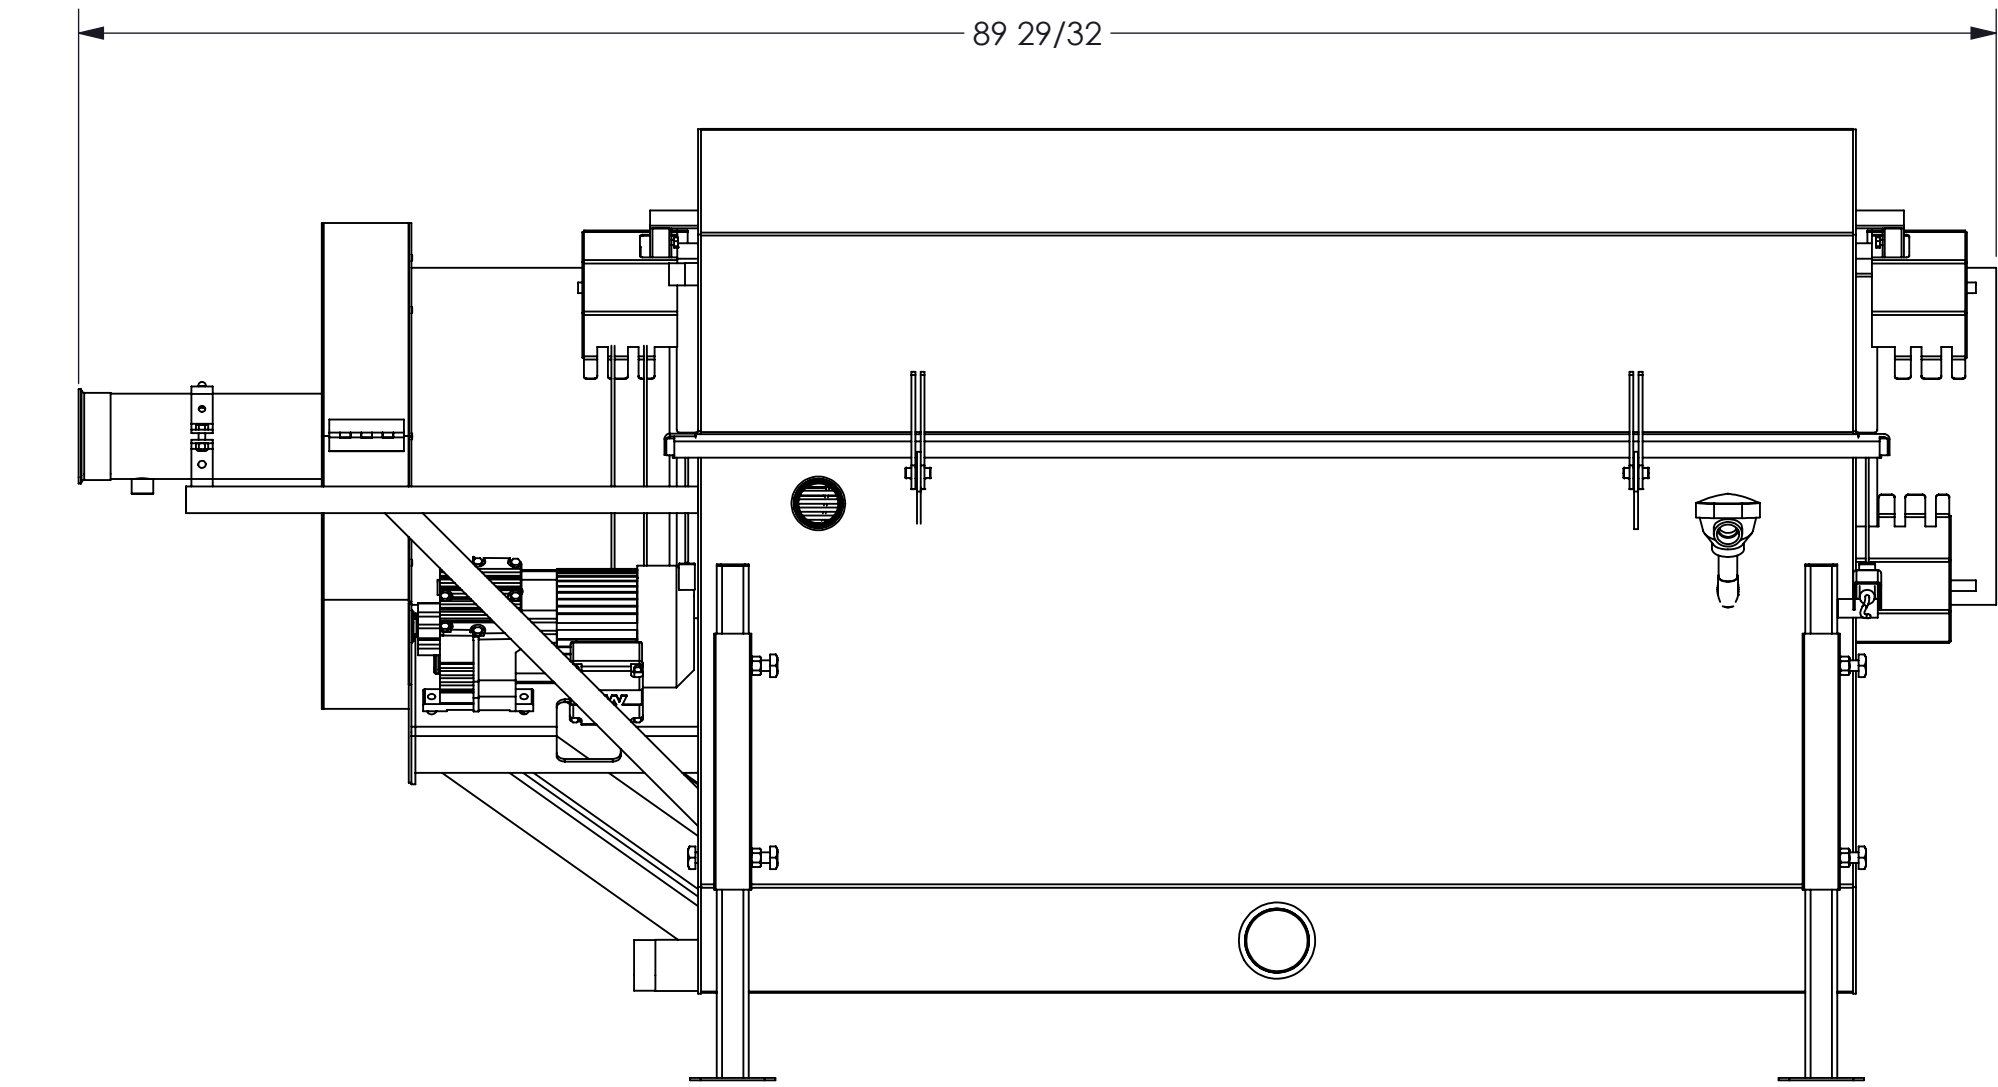


Revision	-	Imeehl	9/14/2016	INITIAL RELEASE		Description of Change	
ECN #		By	Date				
Current Revision Information							
DIMENSIONS ARE IN INCHES 1 inch = 25.4 mm			TOLERANCES, UNLESS NOTED				SURFACE FINISH 250 MICRON/INCH. BREAK ALL SHARP EDGES 0.015. CONCENTRICITY 0.01 TIR.
			X.XX ±0.01 FRACT ±1/16 X.XXX ±0.005 ANGLE ±0.05°				
SPECIFICATIONS UNLESS OTHERWISE NOTED							

PRIME
Equipment Group, Inc.

This document may contain trade secrets and confidential information that is the sole property of Prime Equipment Group, Inc. (Prime). Prime reserves all patent, copyright, trademark and other intellectual property rights in information contained in this document. Recipients of this document are NOT authorized to use, reproduce, copy, disclose or transmit, in whole or in part, the information contained herein without the prior written consent of Prime. All rights reserved. Copyright 2007 Prime Equipment Group, Inc.

Este documento pode conter segredos comerciais e informações confidenciais que é propriedade exclusiva da Prime Equipment Group, Inc. (Prime). Prime reserva todos os direitos autorais, marcas, patentes, direitos de propriedade intelectual e outros direitos de propriedade intelectual em informações contidas neste documento. Os destinatários deste documento NÃO são autorizados a usar, reproduzir, copiar, divulgar ou transmitir, no todo ou em parte, as informações contidas aqui sem o consentimento por escrito da Prime. Todos os direitos reservados. Copyright 2007 Prime Equipment Group, Inc.

Material:		SEE BOM/DETAILS	SEE BOM/DETAILS		ASSEMBLY,300 GALLON, LFS116	
Finish:		SEE BOM/DETAILS	SEE BOM/DETAILS			
Heat Treat:		SEE BOM/DETAILS	Size		Part Number	Rev.
Drawn By:		ahufkmans	D		21994	
Created:		1/5/2015	Class: ASSEMBLY		SHEET 1 OF 1	

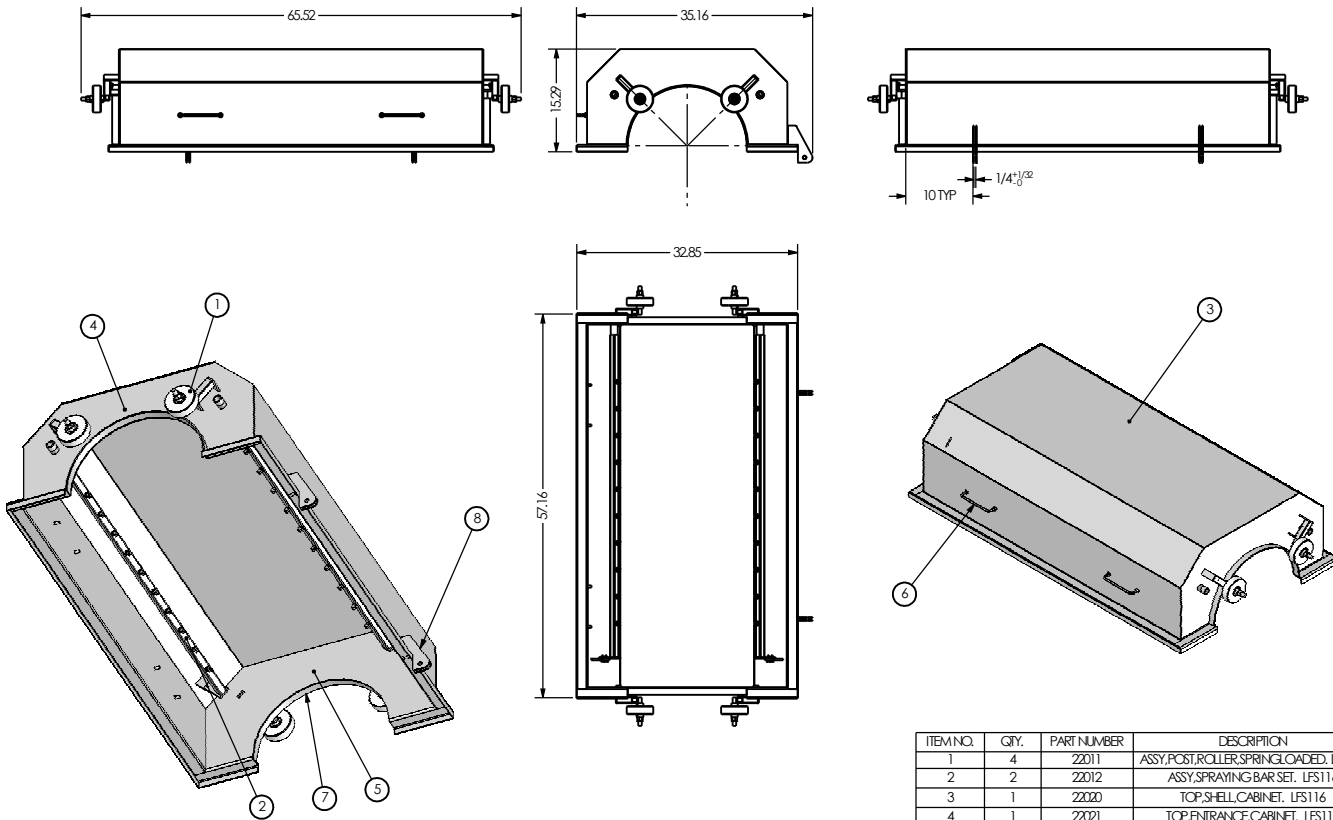

ITEM NO.	QTY.	PART NUMBER	DESCRIPTION
1	4	22011	ASSY,POST,ROLLER,SPRING LOADED, LFS116
2	2	22012	ASSY,SPRAYING BAR SET, LFS116
3	1	22020	TOP,SHELL,CABINET, LFS116
4	1	22021	TOP,ENTRANCE,CABINET, LFS116
5	1	22022	TOP,EXIT,CABINET, LFS116
6	2	22770	Pull Handle,6" Round Grip,SS
7	2	26442	RM,CABINET,LFS116
8	4	26457	PLATE,HINGE,COVER, LFS116
			ASSY COVER, LFS116

DESIGNED BY	1/1/2015	INITIAL RELEASE	1/1/2015
REVISION	1/1/2015	By	1/1/2015
CURRENT REVISION INFORMATION			
DESCRIPTION OF CHANGE			
DIMENSIONS ARE IN INCHES 1 INCH = 25.4 MM			
TOLERANCES, UNLESS NOTED XXX ±.010 XXXX ±.005 ANGLE .5005*			
SURFACE FINISH: 250 MICRON CH BREAK ALL SHARP EDGES CONCENTRICITY .001 IIR			
SPECIFICATIONS UNLESS OTHERWISE NOTED			

FIVE
EQUIPMENT GROUP, INC.


For information only, this drawing is not to be used for manufacturing purposes without the express written consent of Five Equipment Group, Inc. All rights reserved. Copyright 2015 Five Equipment Group, Inc.

For information only, this drawing is not to be used for manufacturing purposes without the express written consent of Five Equipment Group, Inc. All rights reserved. Copyright 2015 Five Equipment Group, Inc.


For information only, this drawing is not to be used for manufacturing purposes without the express written consent of Five Equipment Group, Inc. All rights reserved. Copyright 2015 Five Equipment Group, Inc.









For information only, this drawing is not to be used for manufacturing purposes without the express written consent of Five Equipment Group, Inc. All rights reserved. Copyright 2015 Five Equipment Group, Inc.

For information only, this drawing is not to be used for manufacturing purposes without the express written consent of Five Equipment Group, Inc. All rights reserved. Copyright 2015 Five Equipment Group, Inc.

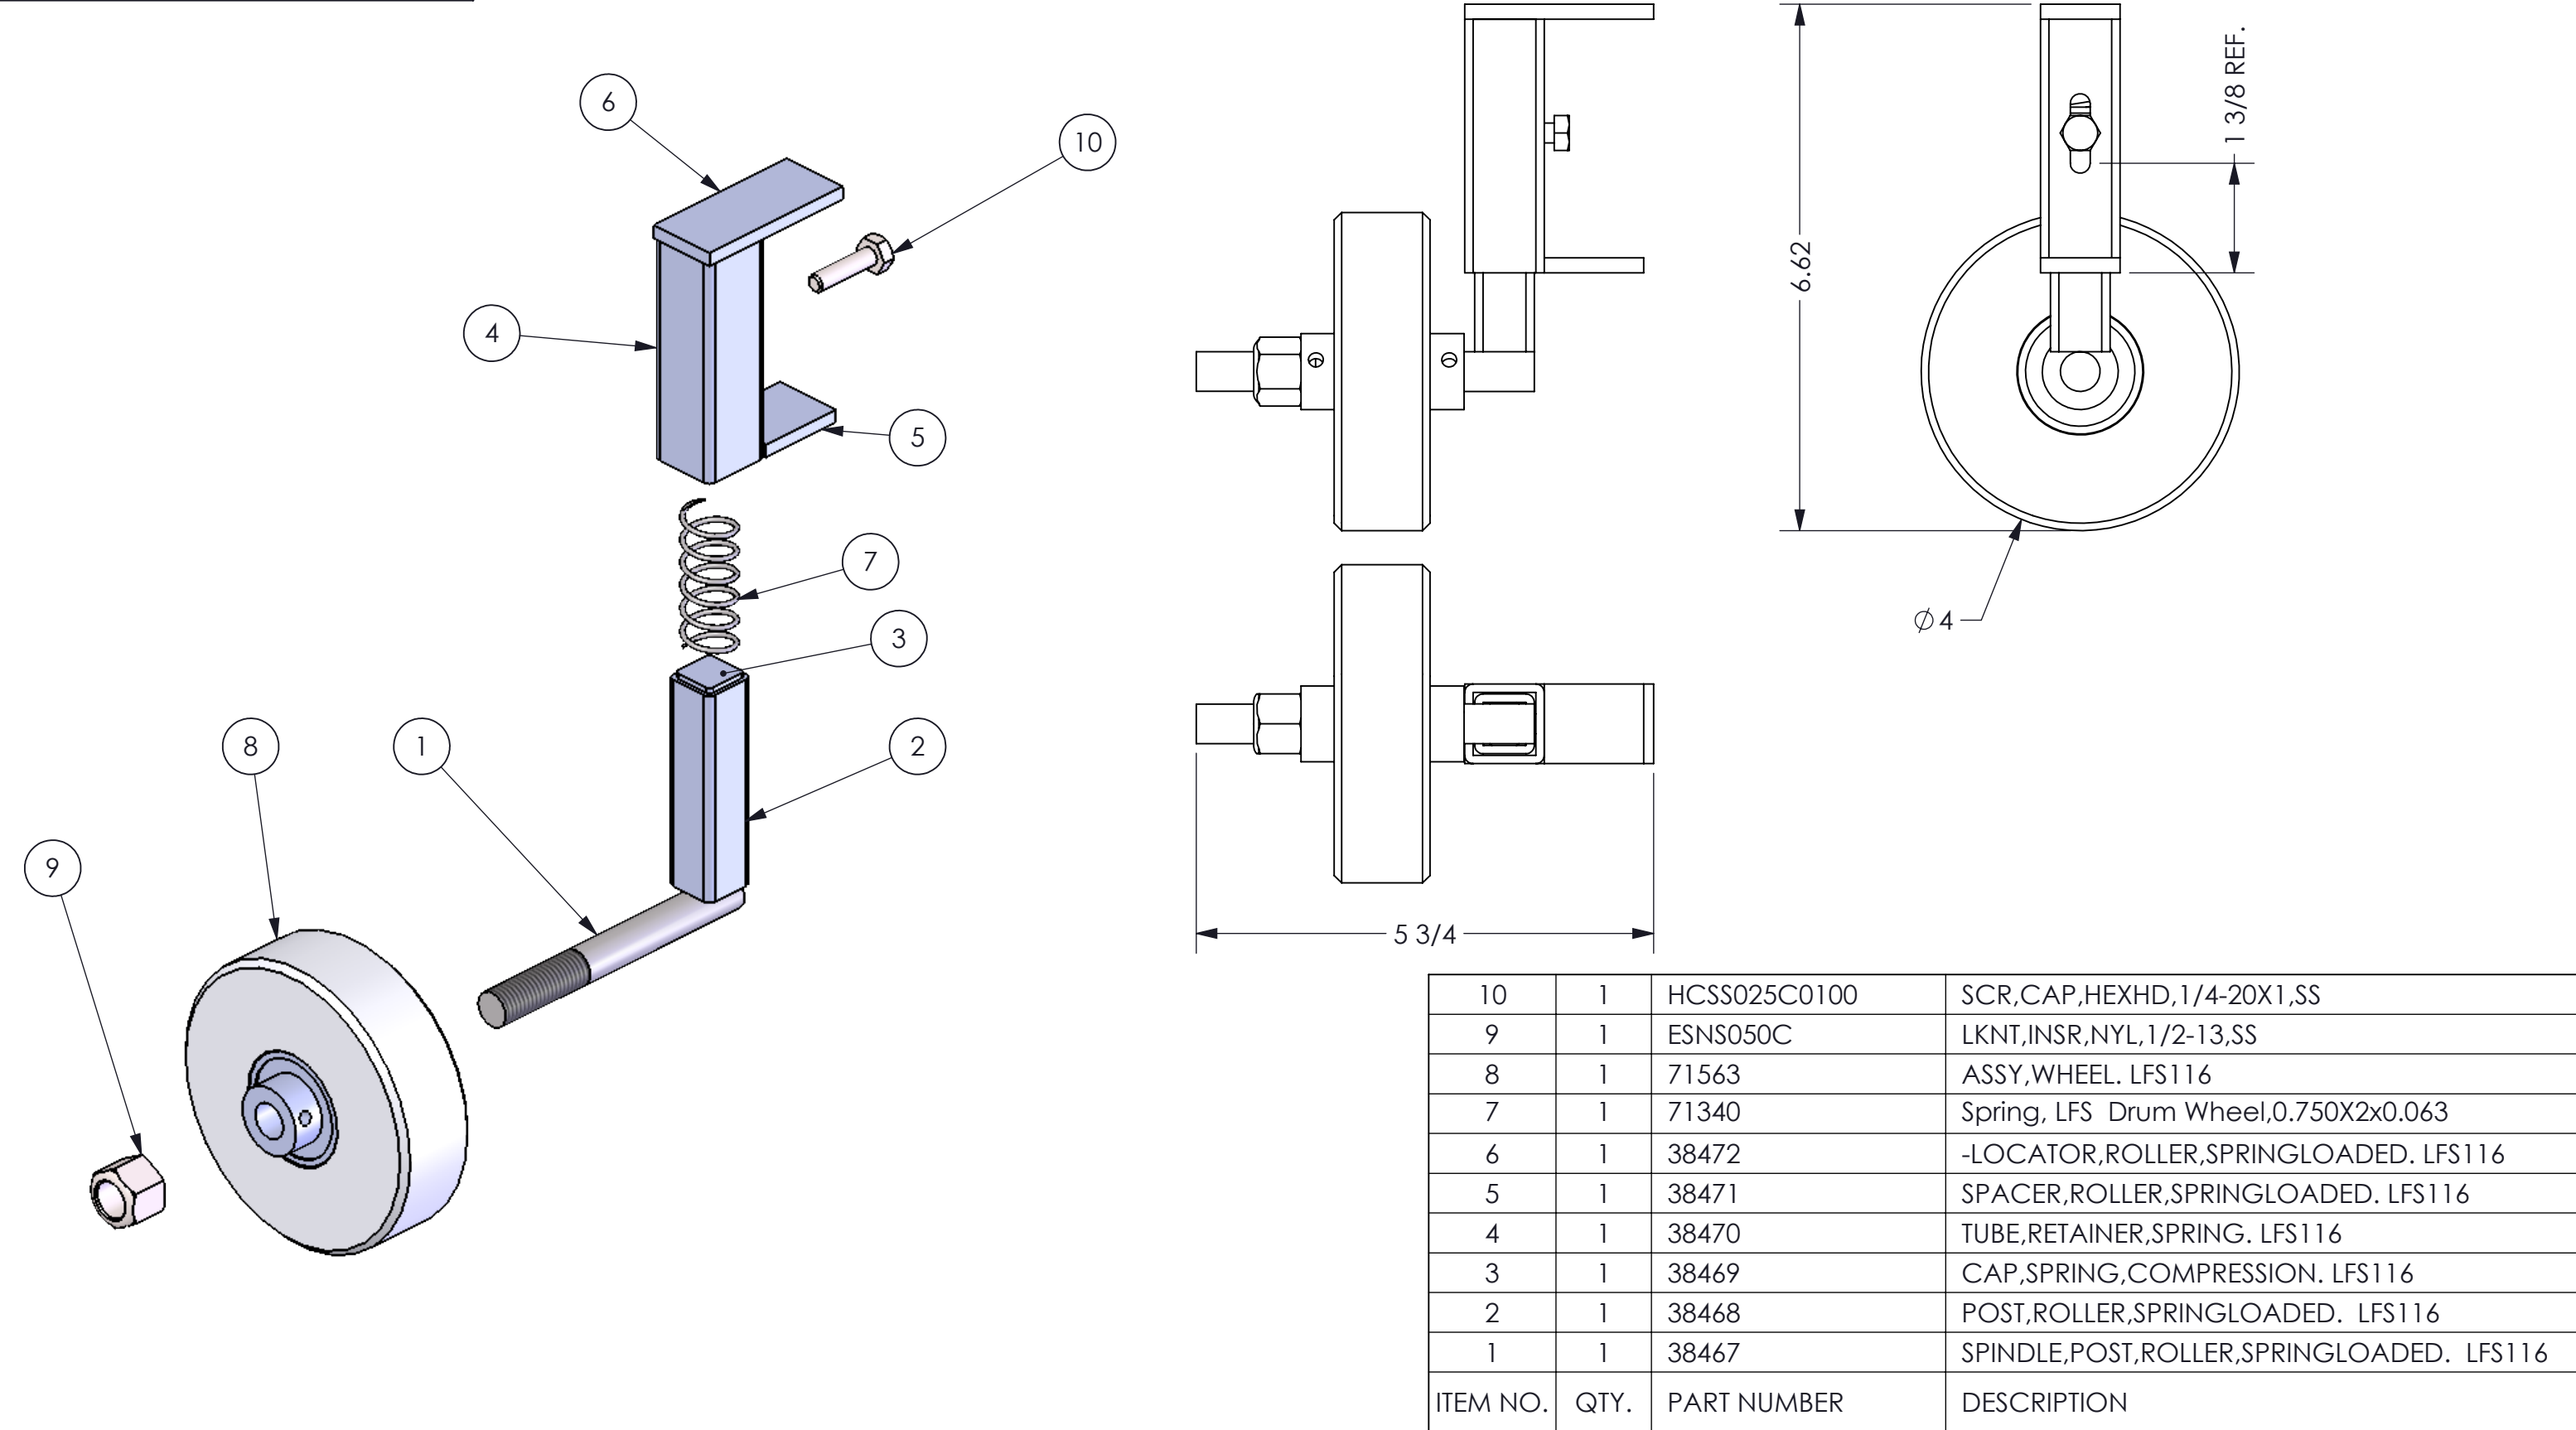





		-	tmeahl	1/11/2017	INITIAL RELEASE	PRIME Equipment Group, Inc. This document may contain trade secrets and confidential information that is the sole property of Prime Equipment Group, Inc. (Prime). Prime reserves all patent, copyright, trademark and other intellectual property rights in information contained in this document. Recipients of this document are NOT authorized to use, reproduce, copy, disclose or transmit, in whole or in part, the information contained herein without the prior written consent of Prime. All rights reserved. Copyright 2007 Prime Equipment Group, Inc. Este documento pode conter segredos comerciais e informações confidenciais que é propriedade exclusiva da Prime Equipment Os destinatários deste documento NÃO são divulgar ou transmitir, no todo ou em parte, consentimento por escrito da Prime. Todos os direitos reservados. Copyright 2007 Prime Equipment Group, Inc.	Material:		SEE BOM/DETAILS		ASSY,POST,ROLLER, SPRINGLOADED. LFS116					
Revision	ECN #	By	Date	Description of Change			Finish:		SEE BOM/DETAILS							
Current Revision Information									Heat Treat:		Size		Part Number		Rev.	
DIMENSIONS ARE IN INCHES 1 inch = 25.4 mm				TOLERANCES, UNLESS NOTED X.XX ±0.01 FRACT ±1/16 X.XXX ±0.005 ANGLE ±0.05°			SURFACE FINISH 250 MICROINCH. BREAK ALL SHARP EDGES 0.015. CONCENTRICITY 0.01 TIR.		SEE BOM/DETAILS		B		22011			
SPECIFICATIONS UNLESS OTHERWISE NOTED									Drawn By:		ahurkmans					
									Created:		1/7/2015		Class: ASSEMBLY		SHEET 1 OF 1	

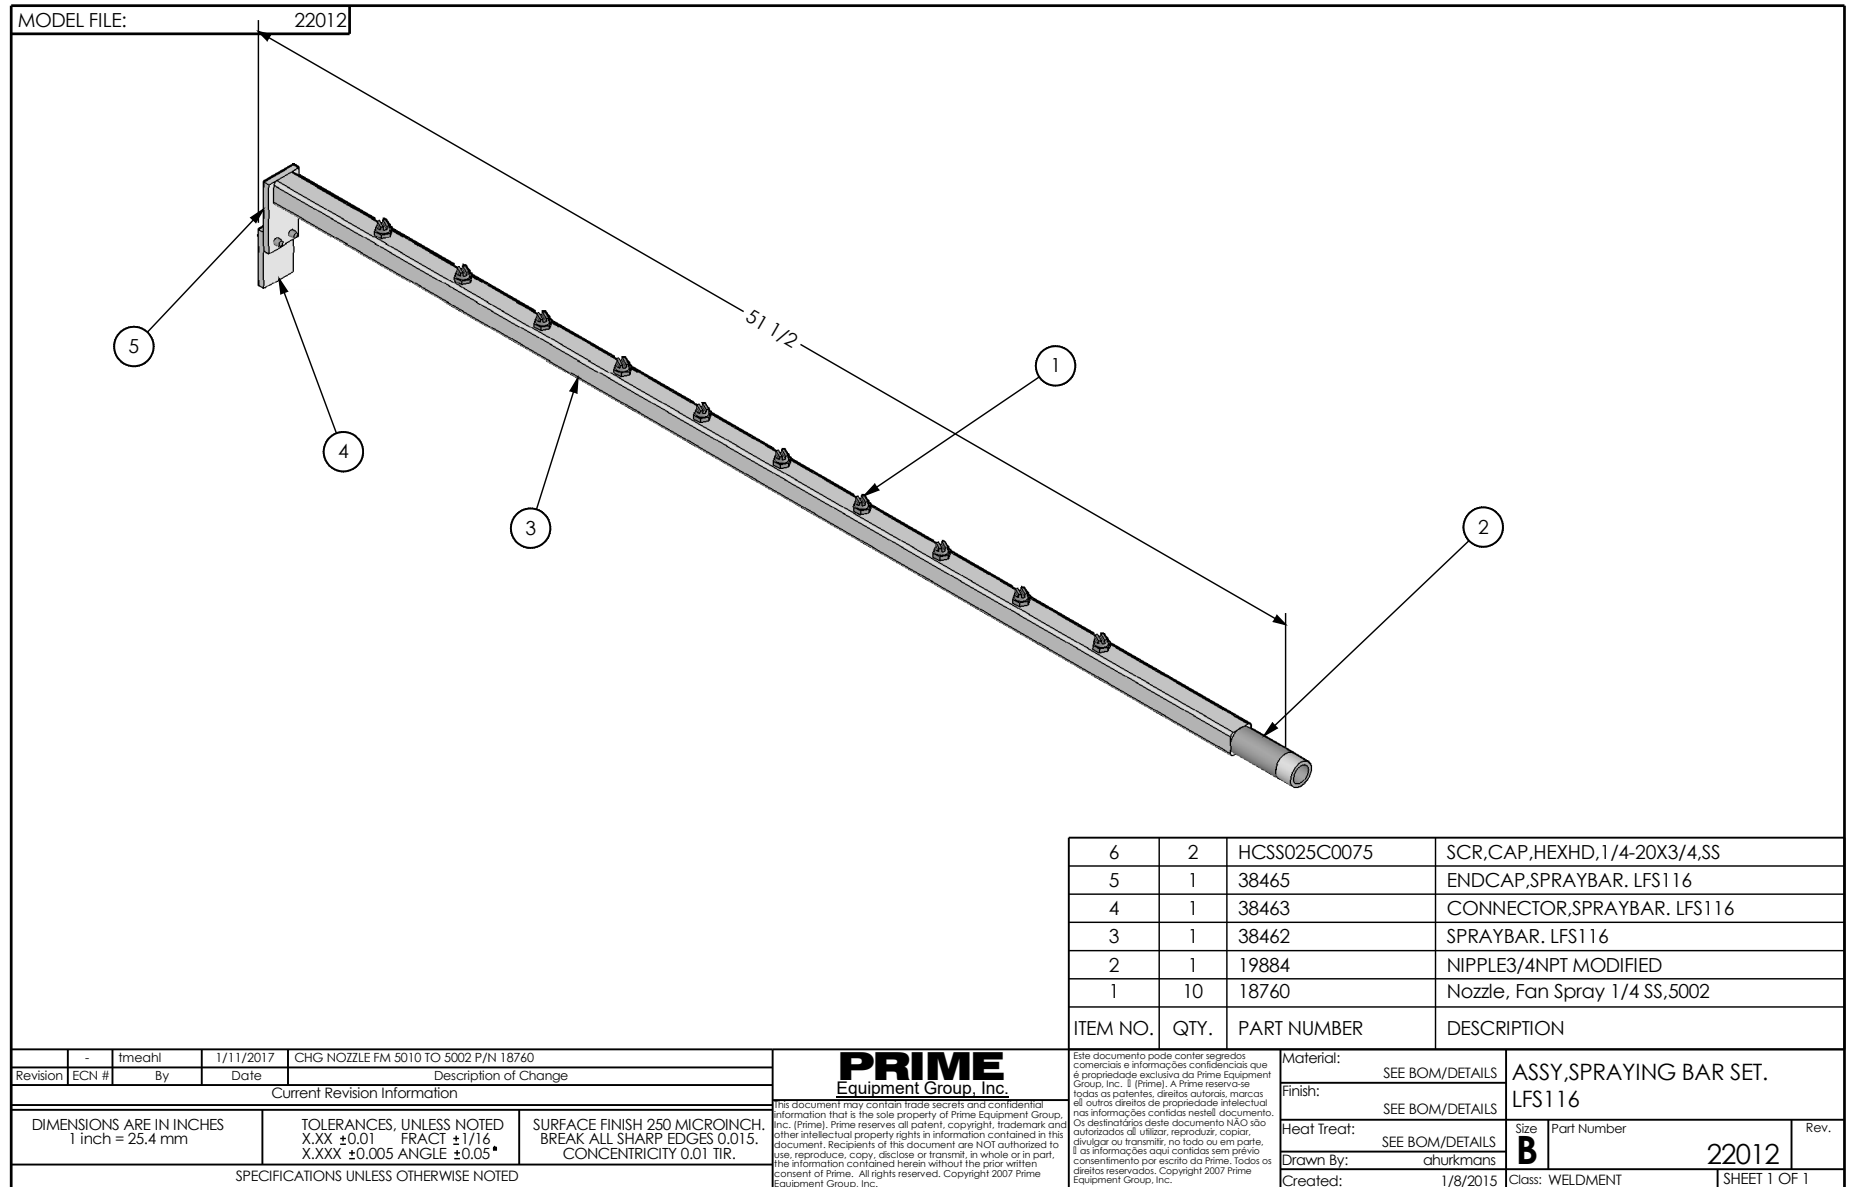

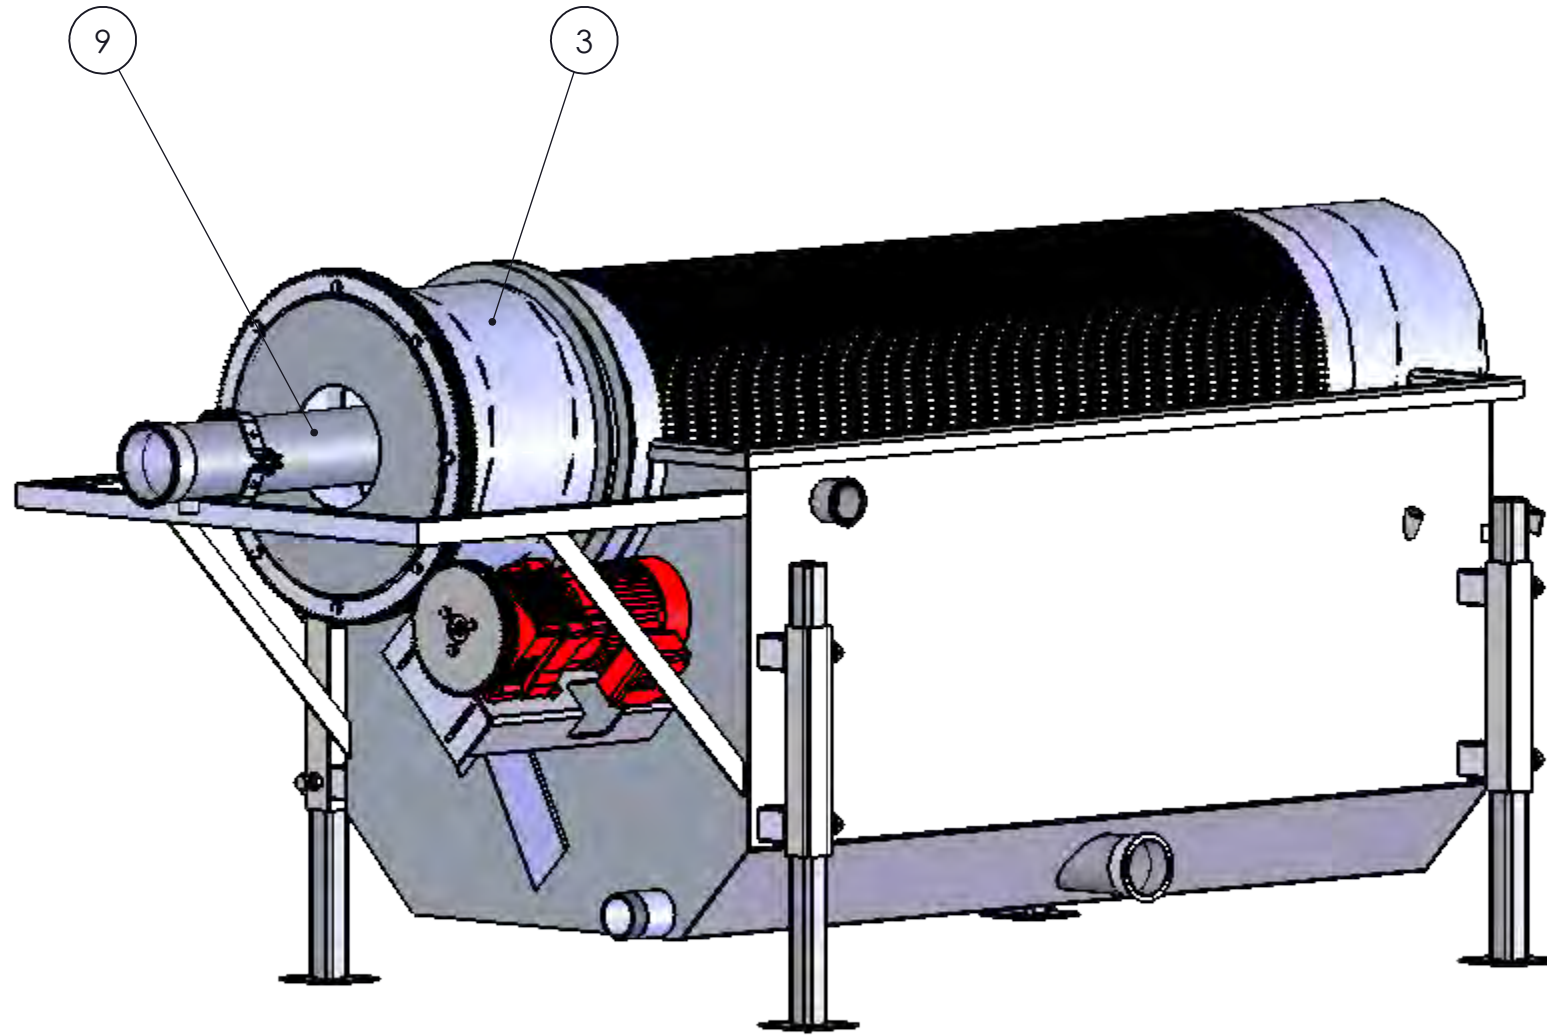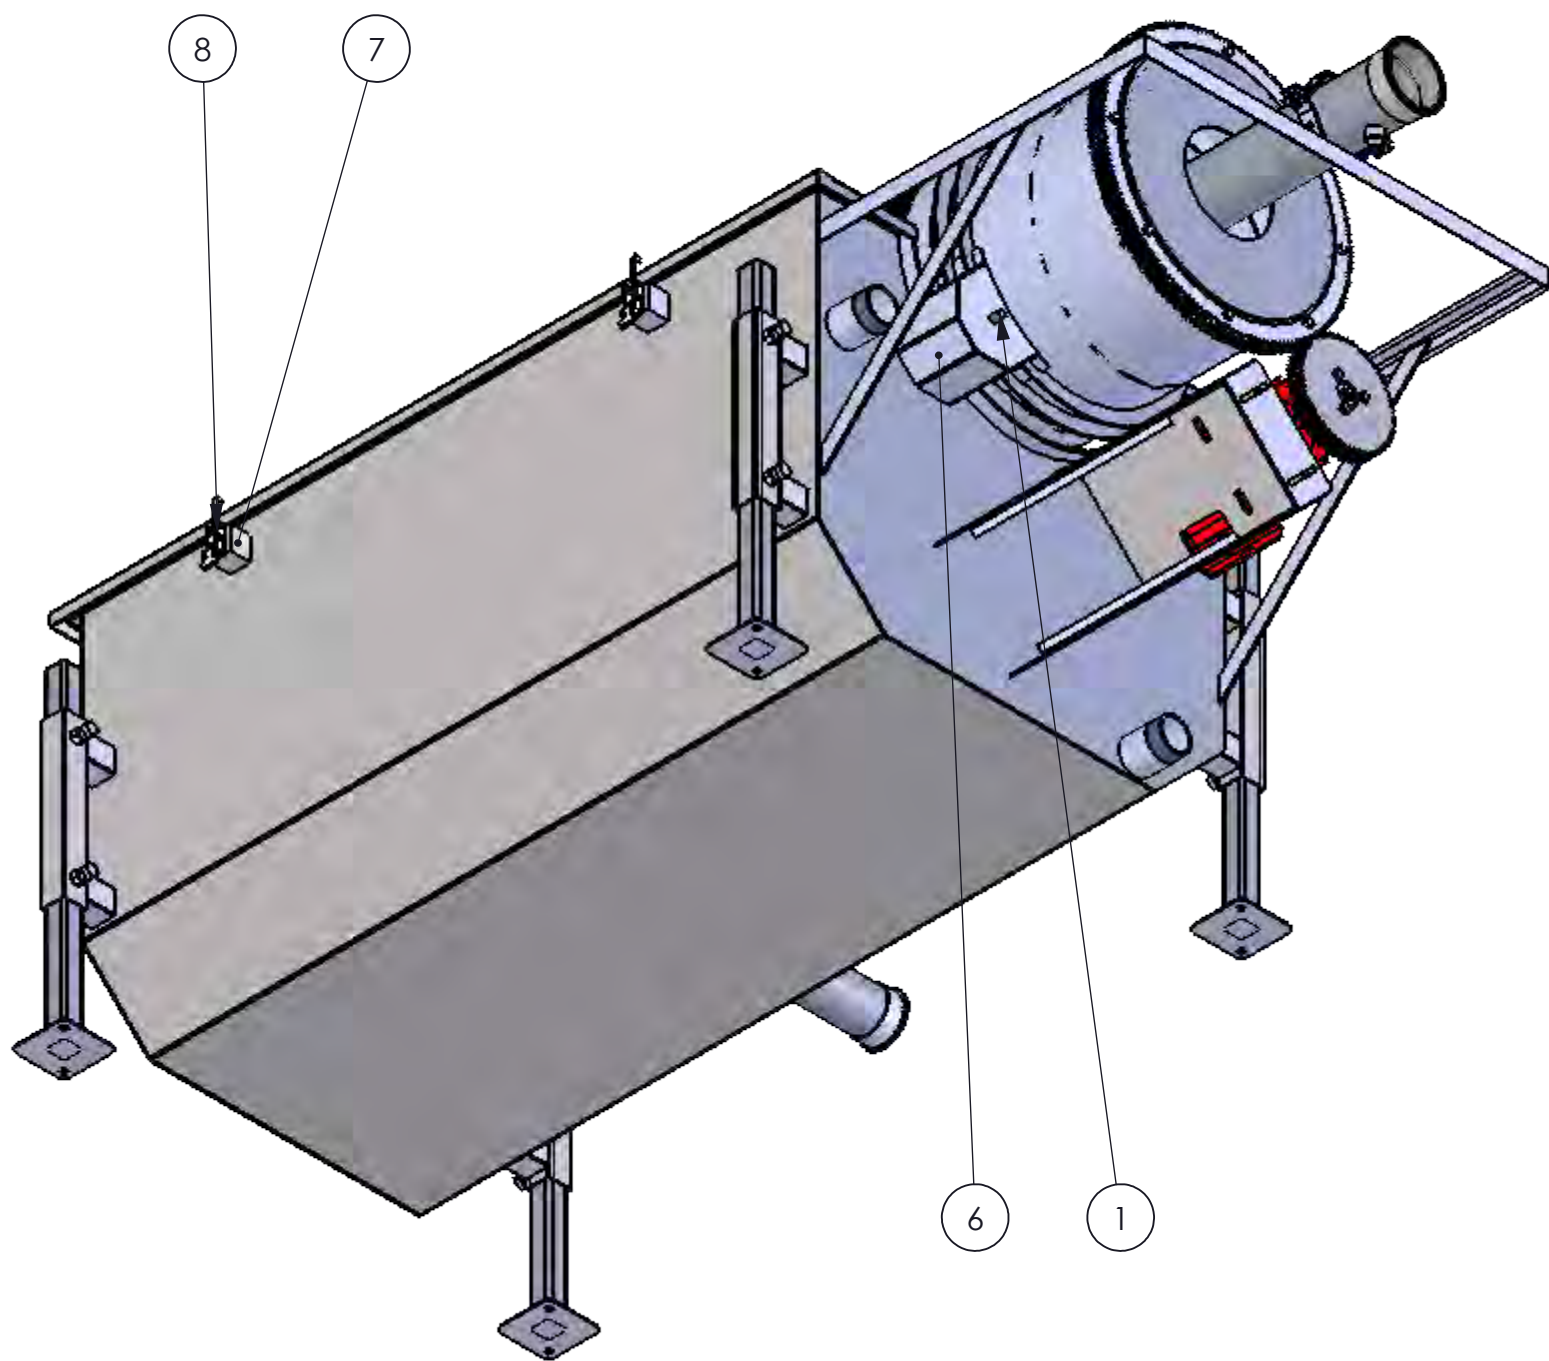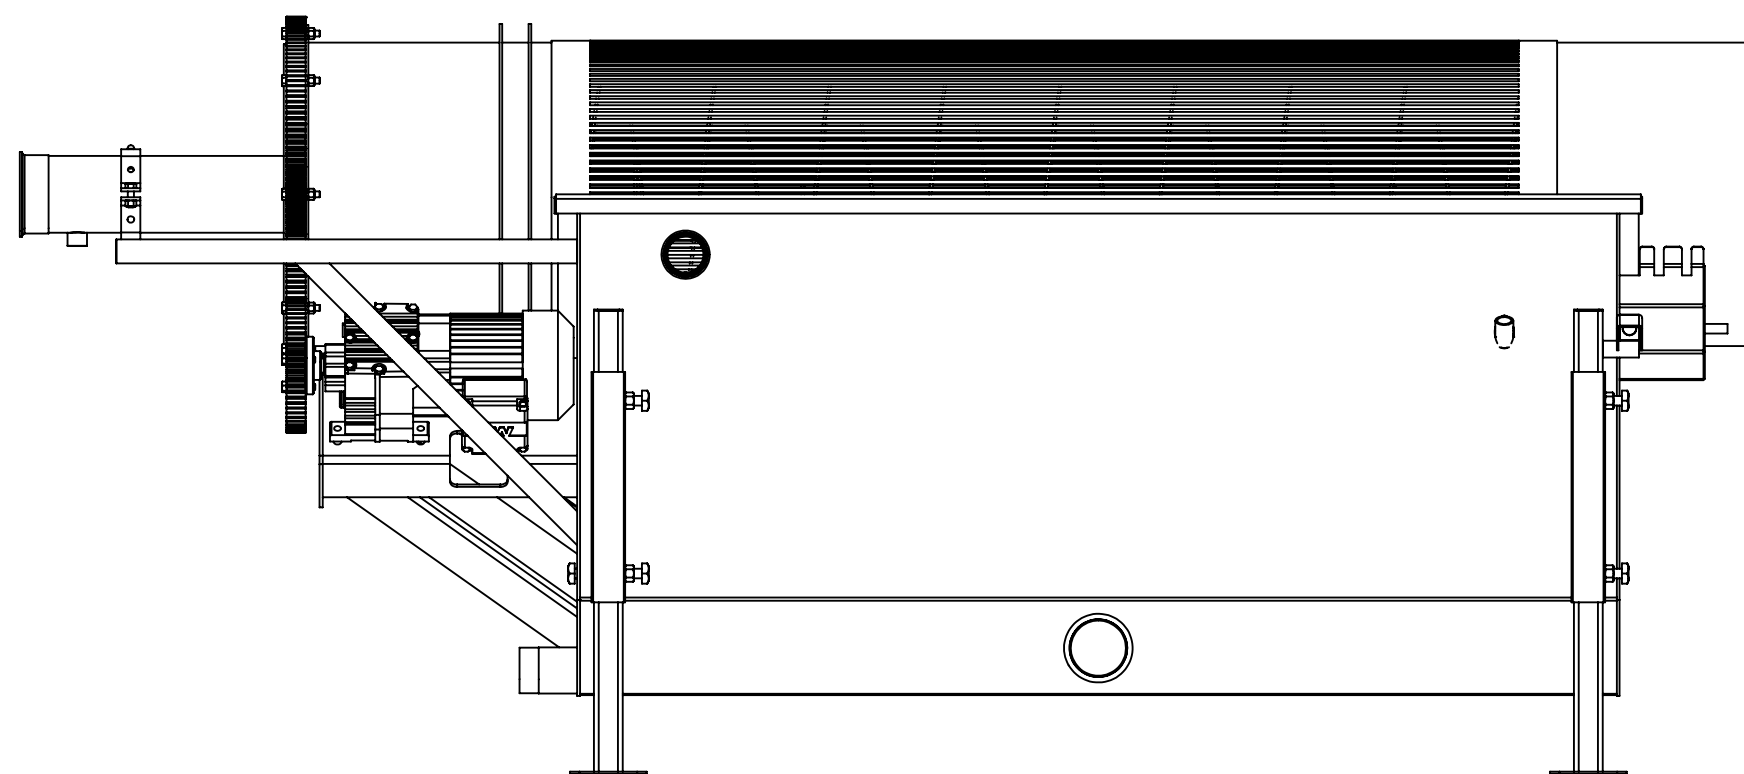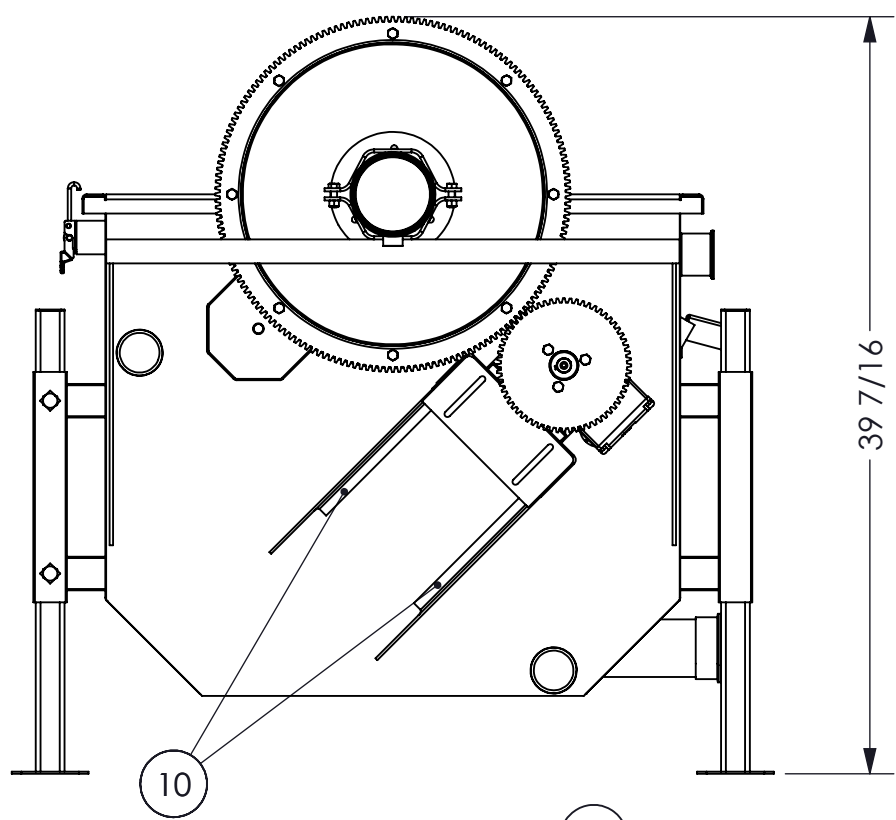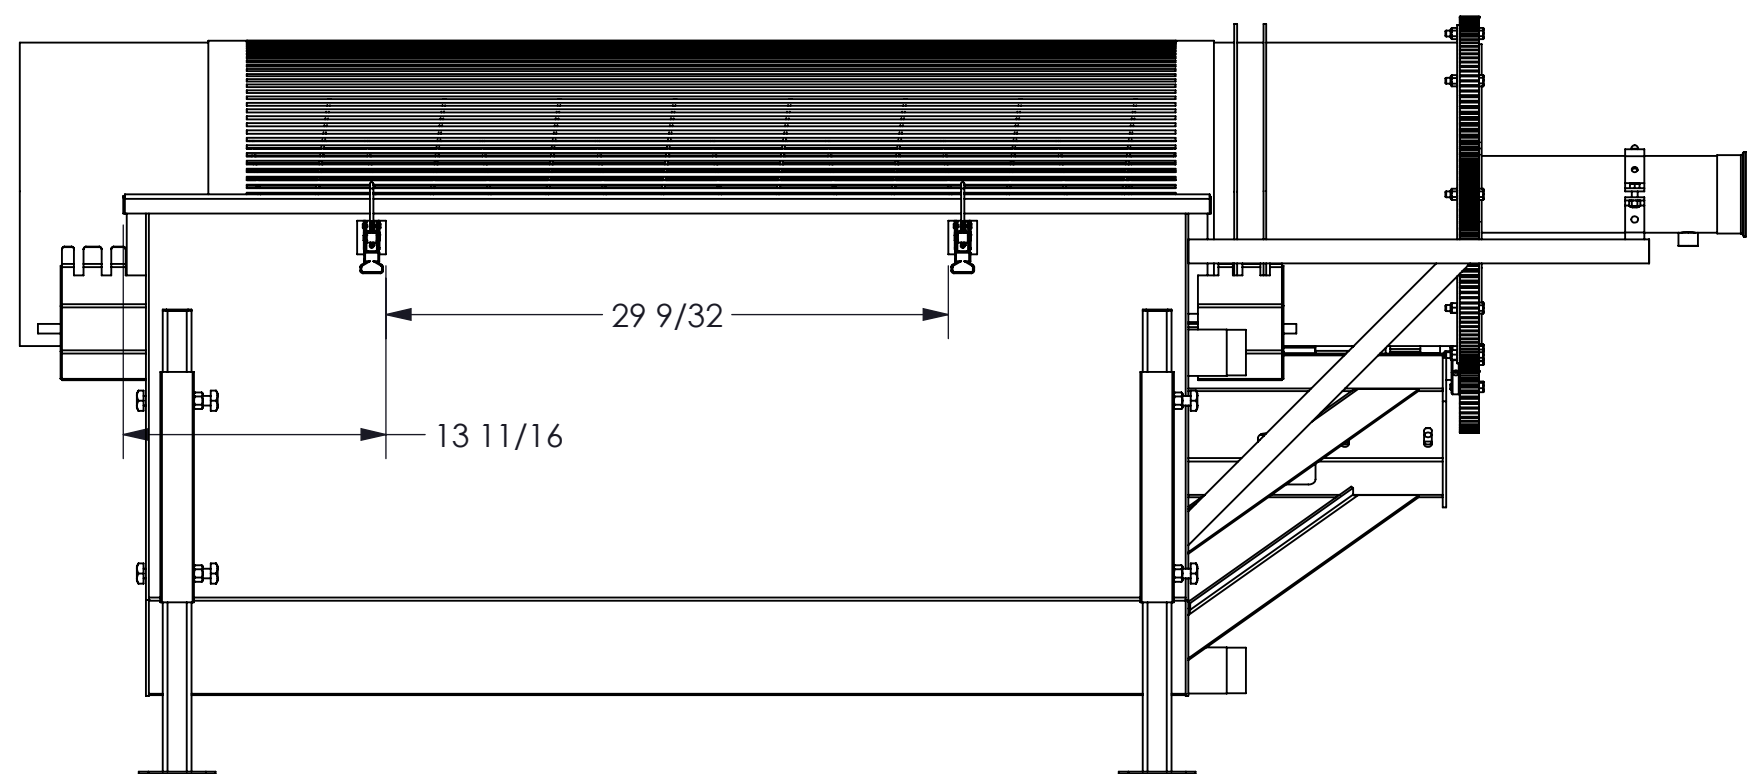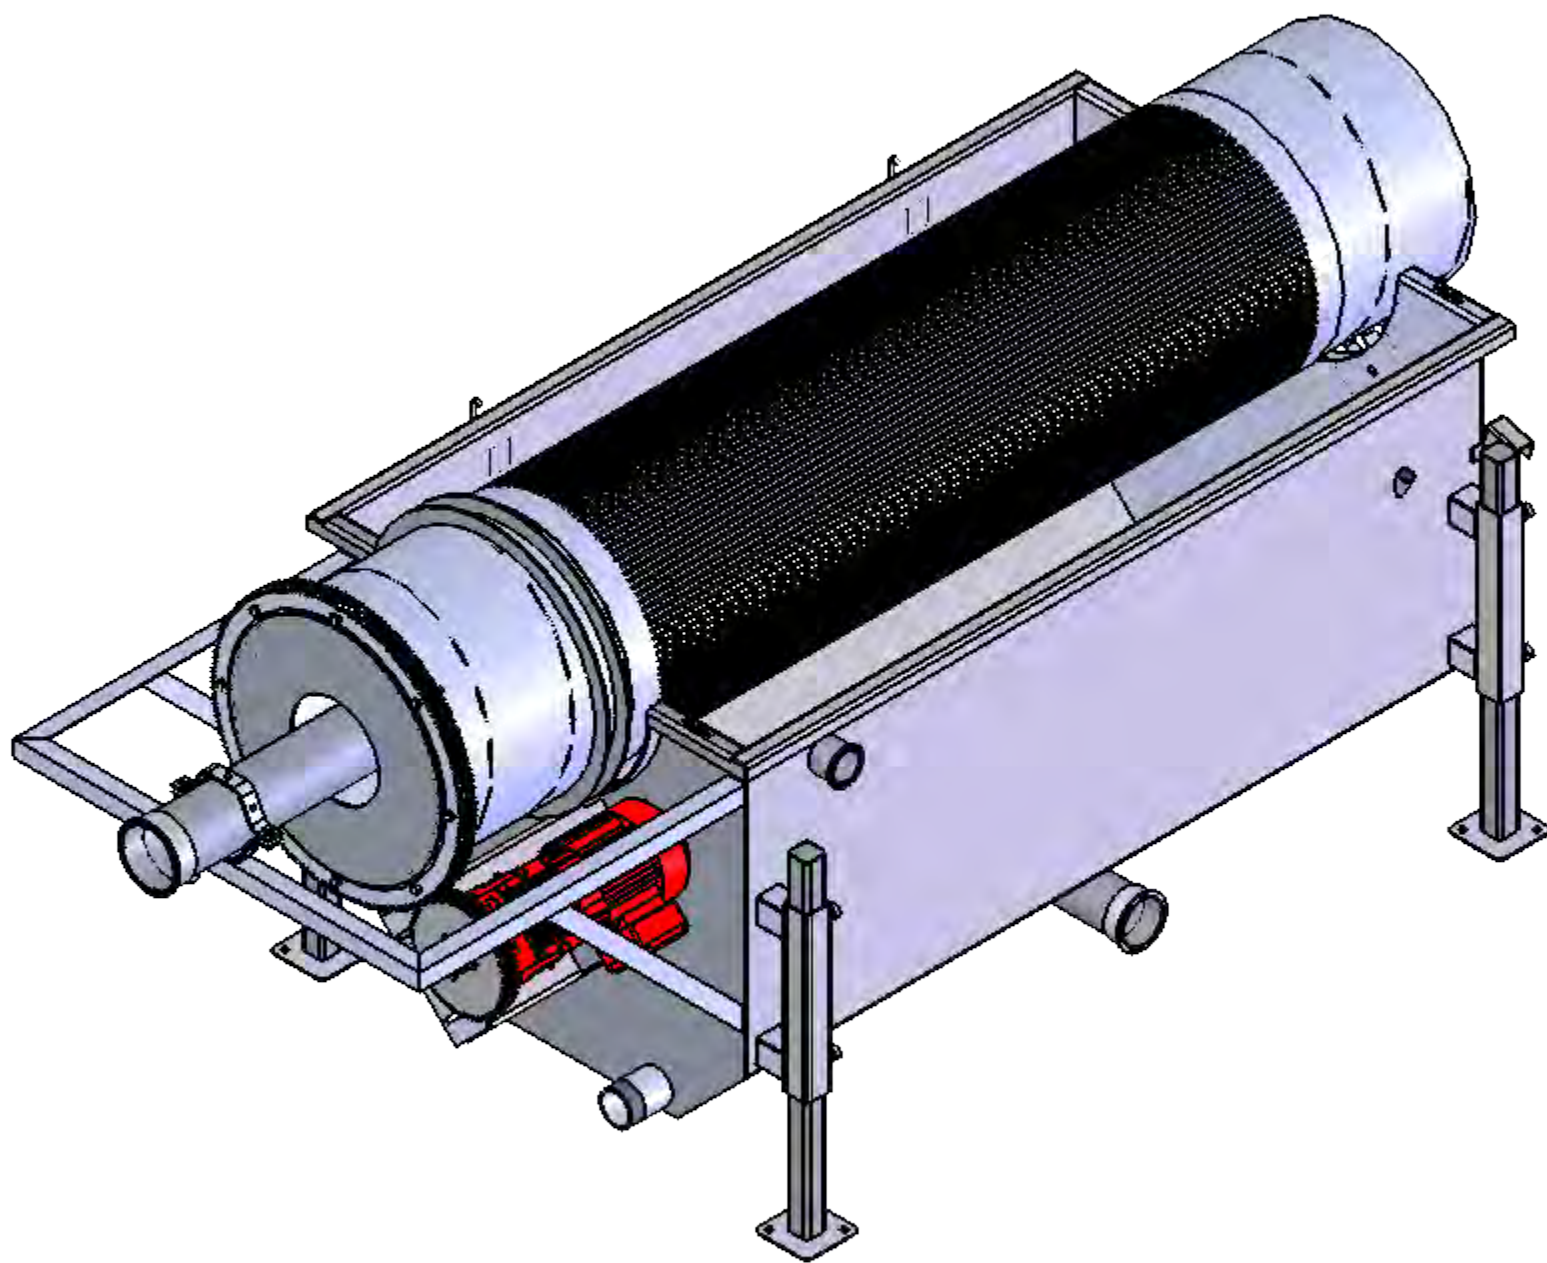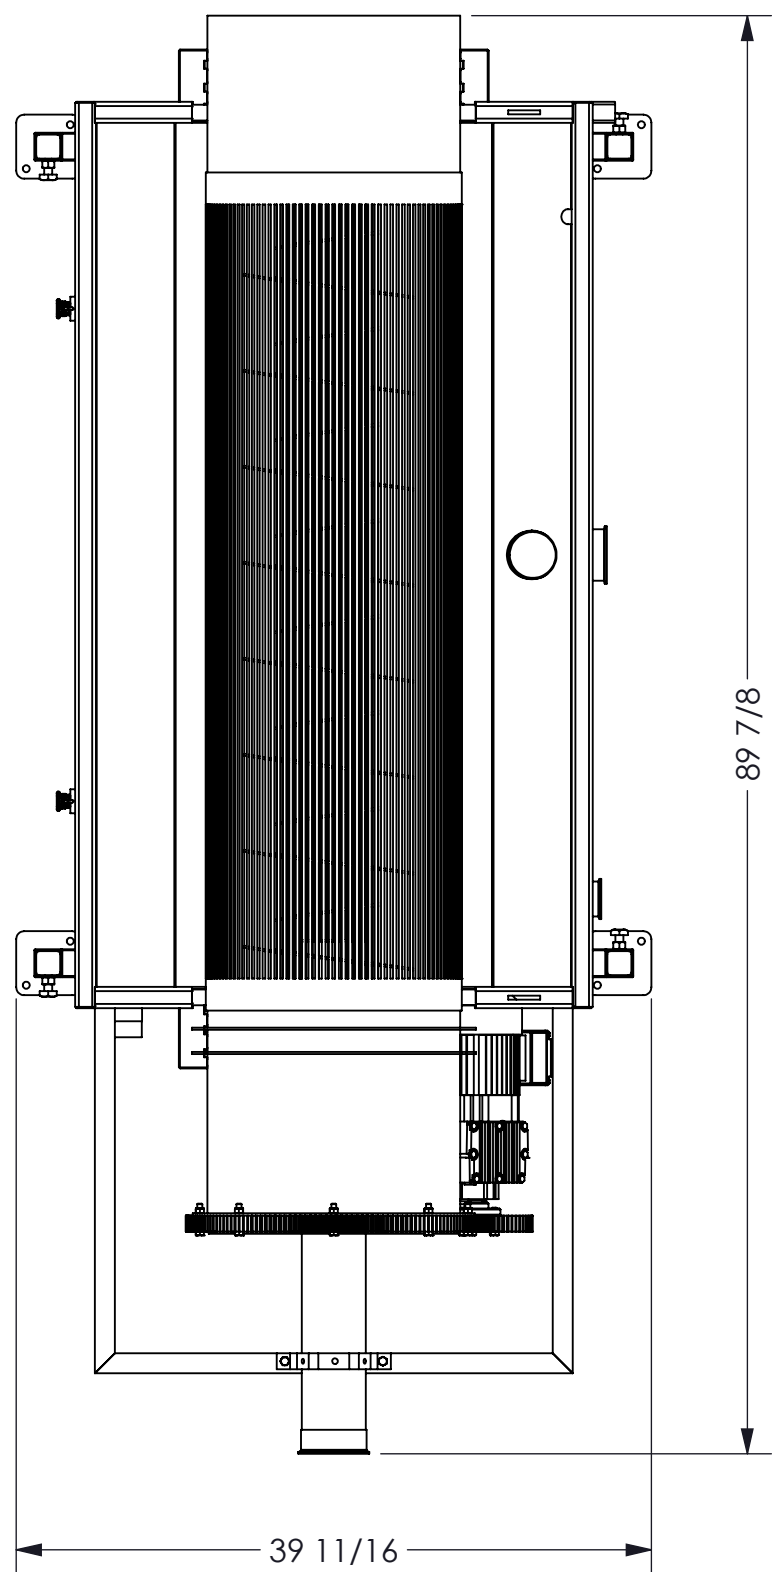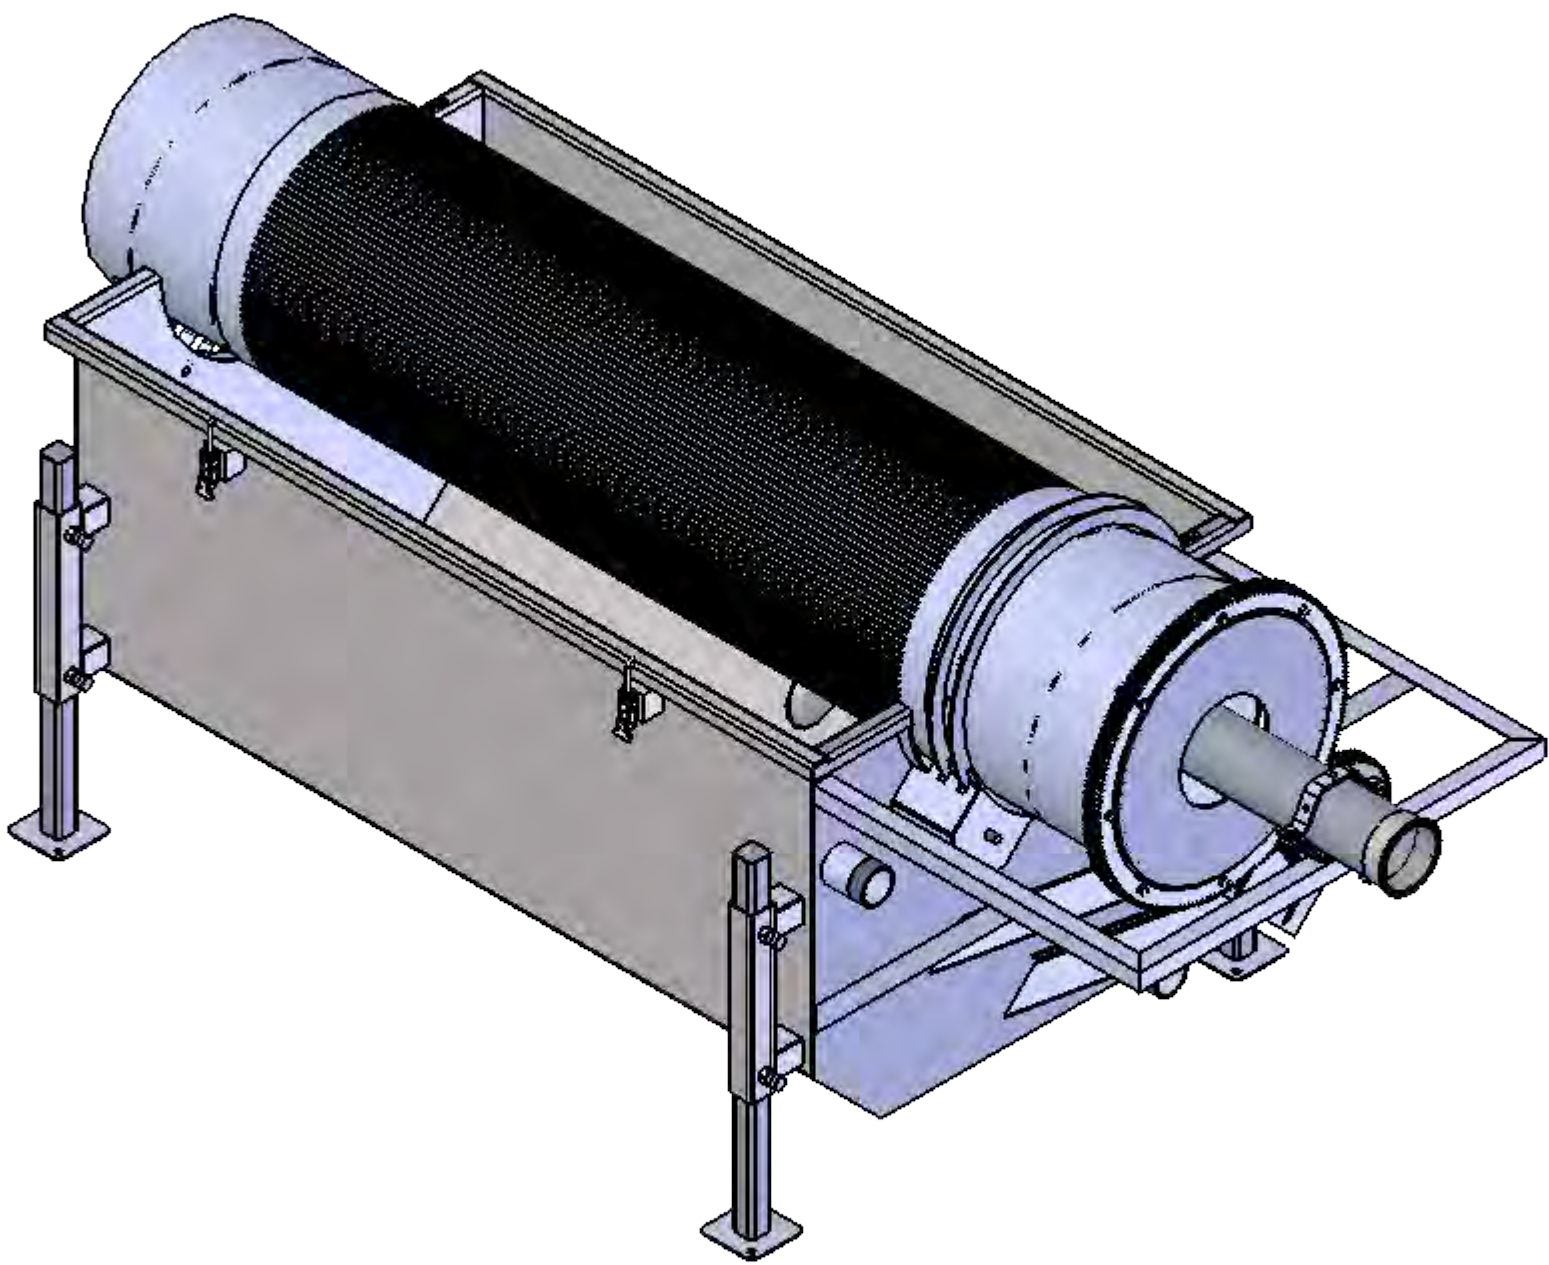

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	22010	ASSY,POST,ROLLER,FIXED. LFS116	3
2	71563	ASSY,WHEEL. LFS116	3
3	21996	ASSEMBLY,DRUM,FILTER,LFS116	1
4	22007	ASSY,GEAR,SMALL LFS116	1
5	38438	MNT,MOT,WLDMNT. LFS116	1
6	22319	ASSY,COVER,WHEEL,BOTTOM. LFS116	3
7	SSSQ1.50	SSSQ1.50 x 1 3/4"LG	2
8	18465	Latch,LFS, Cabinet,Draw	2
9	20005	WATERDIVERter,ASSY. LFS112	1
10	43780	SUPPORT,MTR. LFS116	2
11	49234	WLDMNT,CABINET,BOTTOM.LFS116	1

Revision	ECN #	Imechl	10/21/2016	ADDED MOTOR SUPPORT BRACKETS	 Este documento pode conter segredos comerciais e informações confidenciais que é propriedade exclusiva da Prime Equipment Group, Inc. Todos os destinatários deste documento NÃO são divulgar ou transmitir, no todo ou em parte, sem consentimento por escrito da Prime. Todos os direitos são reservados. Copyright 2007 Prime Equipment Group, Inc.	Material:	SEE BOM/DETAILS	ASSY,CABINET,BOTTOM. LFS116	Rev.
		By	Date	Description of Change		Finish:	SEE BOM/DETAILS		
Current Revision Information						Heat Treat:	SEE BOM/DETAILS		
DIMENSIONS ARE IN INCHES 1 inch = 25.4 mm				TOLERANCES, UNLESS NOTED XX.XX ±0.01 FRAC.T ±1/16 X.XXX ±0.005 ANGLES ±0.05°	SURFACE FINISH 250 MICRON/INCH. BREAK ALL SHARP EDGES 0.015. CONCENTRICITY 0.01 TIR.	Size	Part Number	26427	SHEET 1 OF 1
SPECIFICATIONS UNLESS OTHERWISE NOTED					Drawn By:	churkams	Gloss:		

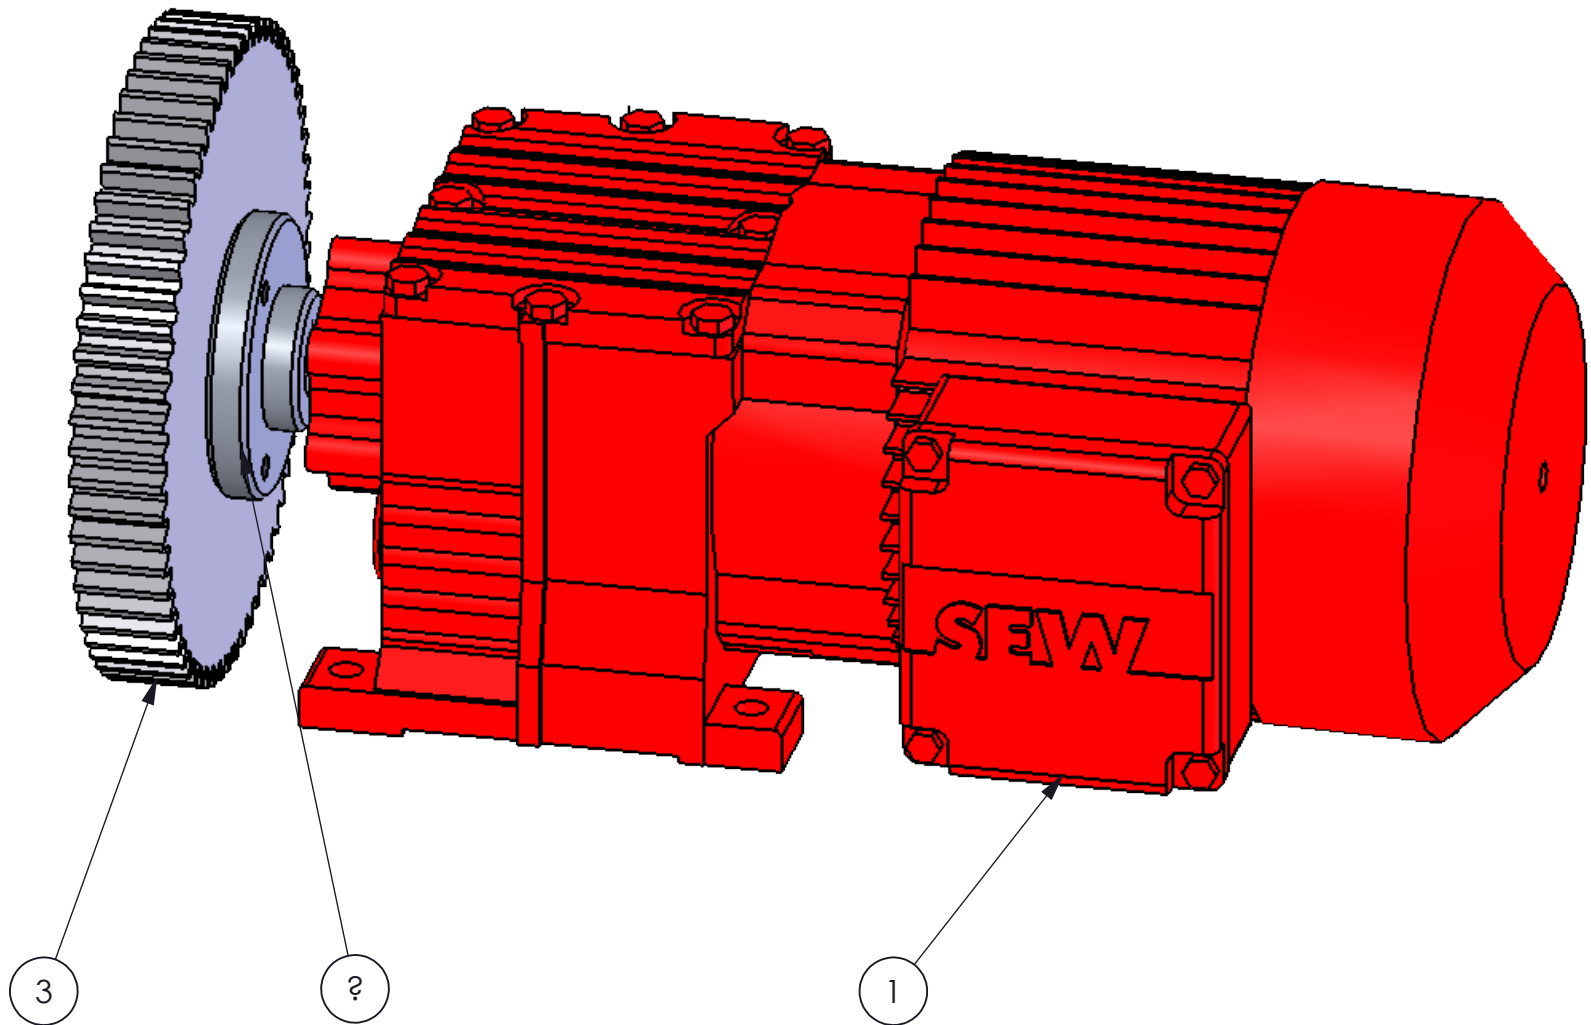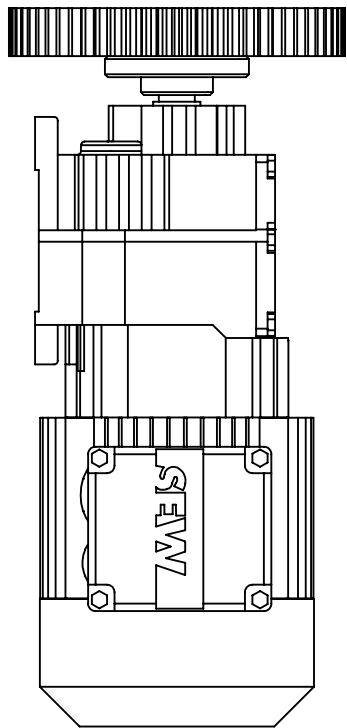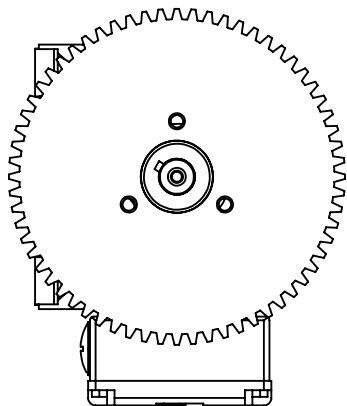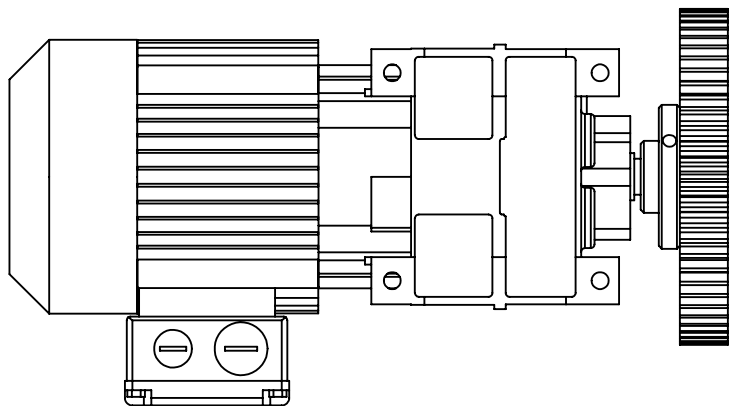


NOTE:
POSITION AND SECURE GEAR ITEM 4 AT ASSEMBLY

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	70728	GEAR MOTOR .25 HP 460V	1
2	19564	HUB, SPROCKET. LFS112	1
3	70760	GEAR,SMALL DRIVE 7 F/WATER FILTER	1

	-	ahurkmans	1/13/2015	INITIAL RELEASE
Revision	ECN #	By	Date	Description of Change
Current Revision Information				
DIMENSIONS ARE IN INCHES 1 inch = 25.4 mm			TOLERANCES, UNLESS NOTED X.XX ±0.01 FRACT ±1/16 X.XXX ±0.005 ANGLE ±0.05°	SURFACE FINISH 250 MICROINCH. BREAK ALL SHARP EDGES 0.015. CONCENTRICITY 0.01 TIR.
SPECIFICATIONS UNLESS OTHERWISE NOTED				

PRIME Equipment Group, Inc.		Este documento pode conter segredos comerciais e informações confidenciais que é propriedade exclusiva da Prime Equipment Group, Inc. (Prime). Prime reserves all patent, copyright, trademark and other intellectual property rights in information contained in this document. Recipients of this document are NOT authorized to use, reproduce, copy, disclose or transmit, in whole or in part, the information contained herein without the prior written consent of Prime. All rights reserved. Copyright 2007 Prime Equipment Group, Inc.		Material: SEE BOM/DETAILS		ASSY,GEAR,SMALL LFS116		
Os destinatários deste documento NÃO são divulgar ou transmitir, no todo ou em parte, o conteúdo deste documento sem o consentimento por escrito da Prime. Todos os direitos reservados. Copyright 2007 Prime Equipment Group, Inc.		Finish: SEE BOM/DETAILS		Heat Treat: SEE BOM/DETAILS		Size B		Part Number
Drawn By: ahurkmans		Created: 1/7/2015		Class: GEAR		22007		Rev.
						SHEET 1 OF 1		

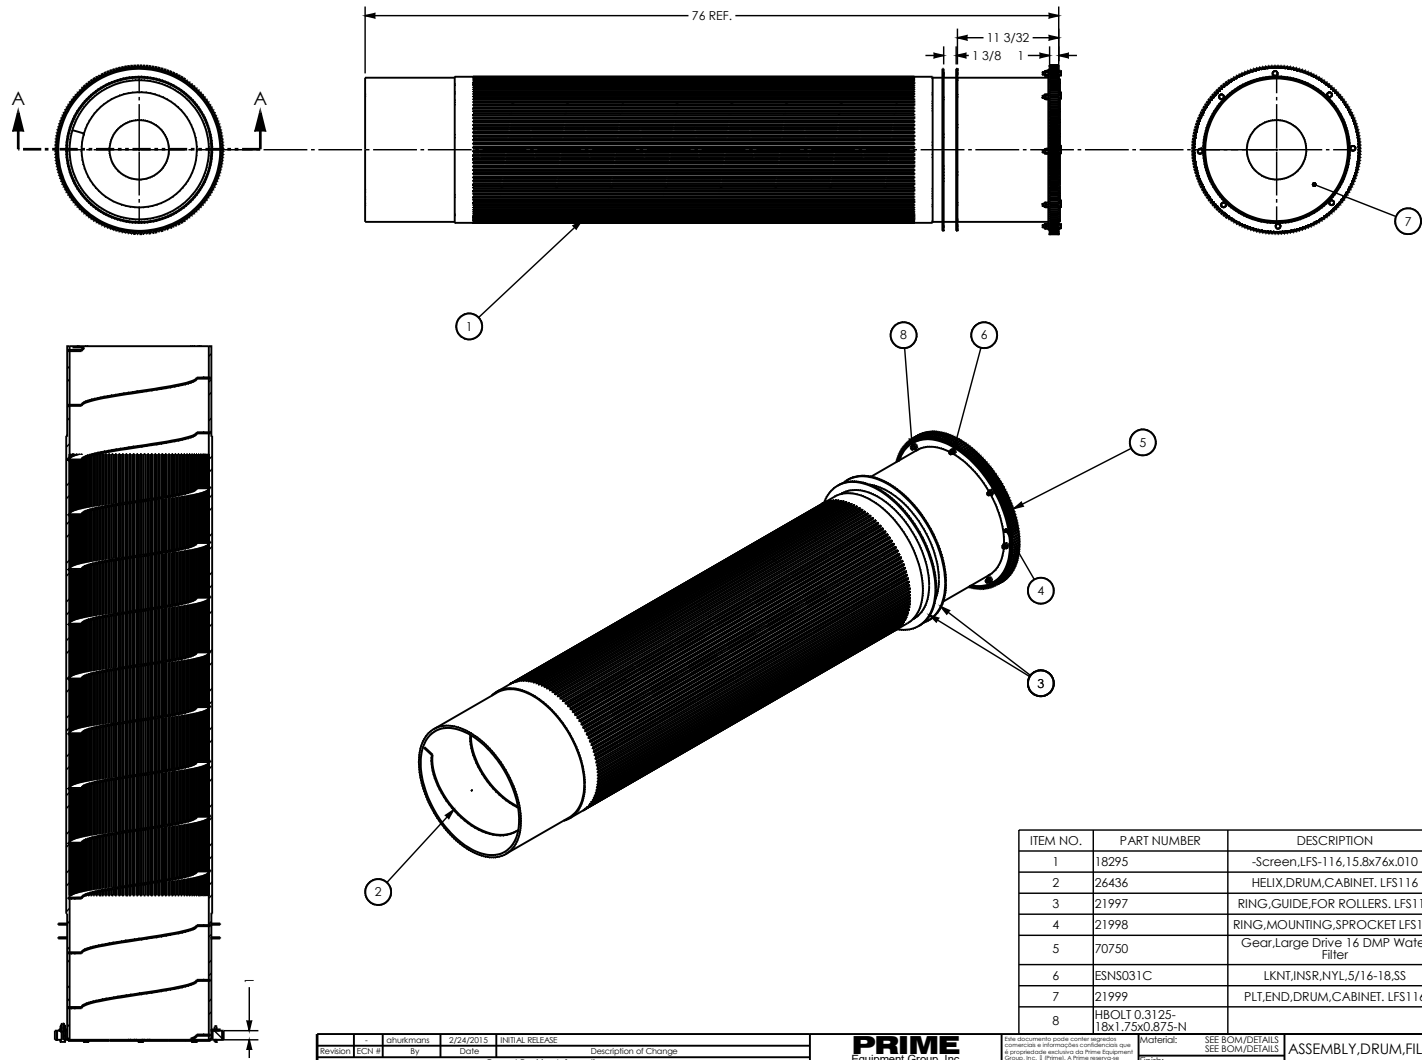


SECTION A-A
SCALE 1 : 8

Revision	-	chukmans	2/24/2015	INITIAL RELEASE
ECN #		By	Date	Description of Change
Current Revision Information				
DIMENSIONS ARE IN INCHES 1 inch = 25.4 mm		TOLERANCES, UNLESS NOTED XXX ±0.01 FRACT ±1/16 XXXX ±0.005 ANGLE ±0.05°		SURFACE FINISH 250 MICRONCH. BREAK ALL SHARP EDGES 0.015. CONCENTRICITY 0.01 TIR.
SPECIFICATIONS UNLESS OTHERWISE NOTED				

PRIME
Equipment Group, Inc.




ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	18295	-Screen,LFS-116,15.8x76x.010	1
2	26436	HELIX,DRUM,CABINET, LFS116	1
3	21997	RING,GUIDE,FOR ROLLERS, LFS116	2
4	21998	RING,MOUNTING,SPROCKET LFS116	1
5	70750	Gear,Large Drive 16 DMP Water Filter	1
6	ESNS031C	LKNT,INSR,NYL,5/16-18,SS	8
7	21999	PLT,END,DRUM,CABINET, LFS116	1
8	HBOLT 0.3125-18x1.75x0.875-N		8

Material:	SEE BOM/DETAILS	ASSEMBLY,DRUM,FILTER,LFS116
Finish:	SEE BOM/DETAILS	
Heat Treat:	SEE BOM/DETAILS	
Drawn By:	chukmans	Part Number 21996
Created:	1/6/2015	Class: ASSEMBLY SHEET 1 OF 1

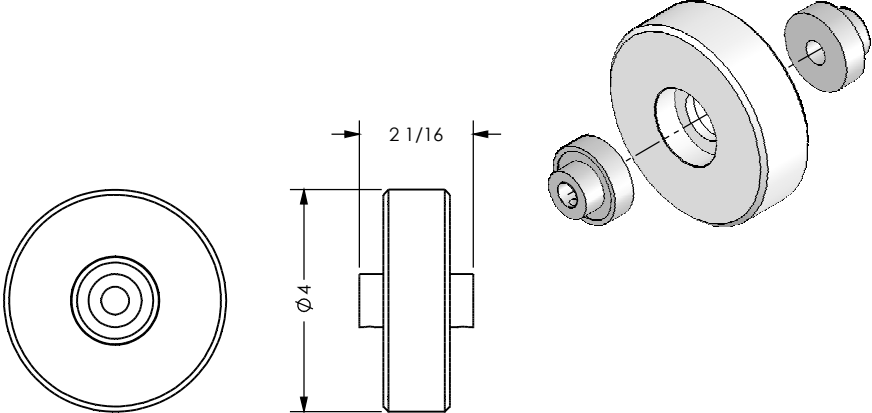MODEL FILE:		71563	
		SPECIFICATIONS UNLESS NOTED: STRAIGHT FINISH 250 LK/INCH BREAK ALL SHARP EDGES 0.015. CONCENTRICITY 0.01 TR.	
TOLERANCES - UNLESS NOTED XXX ±0.01 FRACT ±1/16 XXX ±0.005 ANGLE ±0.05		INITIAL RELEASE	
2 2 70069 Bearing, LFS-112,116,Drum Wheel		1 1 18479 Wheel,Only LFS-116,Drum	
ITEM NO. QTY. PART NUMBER DESCRIPTION		2 2 70069 Bearing, LFS-112,116,Drum Wheel	
1 1 18479 Wheel,Only LFS-116,Drum		1 1 18479 Wheel,Only LFS-116,Drum	
ASSY,WHEEL. LFS116		ASSY,WHEEL. LFS116	
Material: SEE BOM/DETAILS Finish: SEE BOM/DETAILS Heat Treat: SEE BOM/DETAILS Drawn By: tmeahl Created: 2/5/2013		Size: Part Number A 71563 Class: ASSEMBLY	
Rev. C		Rev. C	
Revision ECH #		Revision ECH #	
By		By	
Date		Date	
Current Revision Information		Current Revision Information	

MODEL FILE: 49915

**GASKETS AND CLAMPS
NOT SHOWN**

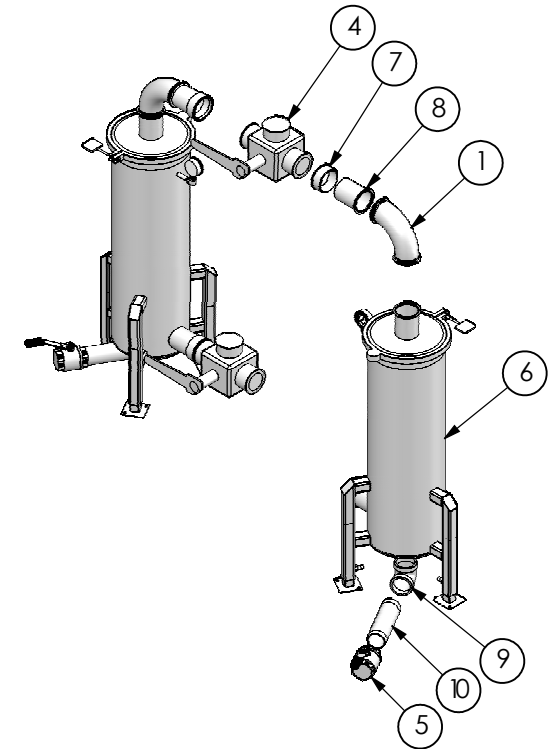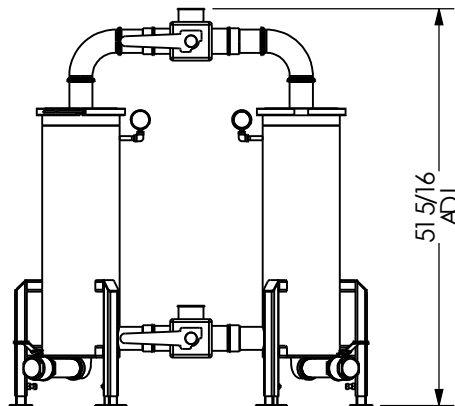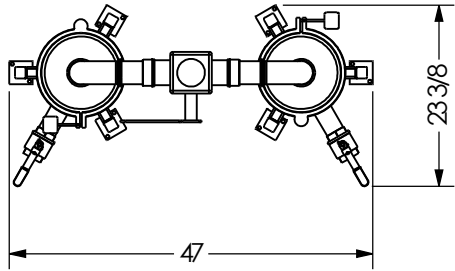

*NOT SHOWN

ITEM NO.	QTY.	PART NUMBER	Description
10	2	SSN12X8	SSN1,2X8,SS,NPT
9	2	SS1LB2.00X90DEGNPT	ELB,2X90DEGNPT,SS
8	2	FERRSANBUT3.0T	FERRULE,3IN,SANI,TANK
7	2	FERRSAN3.0	FERRULE,SANI,3.0,ROLL-ON
6	2	49914	ASSY,10IN ROCKET FILTER,3' PIPING
5	2	18568	Ball Valve, 2"NPT,SS
4	2	18564	VALVE, 3' SS 3-WAY DIVERTER
3	8*	18551	GASKET, 3IN, BUNA,KWIK CLAMP
2	8*	18550	CLAMP,3',HD,SANI
1	2	18250	ELBOW,90,3',SANITARY





Revision	By	Date	Description of Change
-	tmechl	9/23/2016	INITIAL RELEASE
Current Revision Information			
DIMENSIONS ARE IN INCHES 1 inch=25.4mm		TOLERANCES, UNLESS NOTED XXX ±0.01 FRACTION ±1/16 XXXX ±0.005 ANGLE ±0.05	
SPECIFICATIONS UNLESS OTHERWISE NOTED		SURFACE FINISH 250 MICRO INCH BREAK ALL SHARP EDGES 0.015. CONCENTRICITY 0.01 TIR.	

PRIME
Equipment Group, Inc.

This document may contain trade secrets and confidential information that is the sole property of Prime Equipment Group, Inc. (Prime). Prime reserves all patent, copyright, trademark and other intellectual property rights in information contained in this document. Recipients of this document are NOT authorized to use, reproduce, copy, disclose or transmit, in whole or in part, the information contained herein without the prior written consent of Prime. All rights reserved. Copyright 2007 Prime Equipment Group, Inc.

Este documento pode conter segredos comerciais e informações confidenciais que é propriedade exclusiva da Prime Equipment Group, Inc. (Prime). A Prime reserva-se todos os patentes, direitos autorais, marcas e outros direitos de propriedade intelectual nas informações contidas neste documento. Os destinatários deste documento NÃO são autorizados a utilizar, reproduzir, copiar, divulgar ou transmitir, no todo ou em parte, as informações aqui contidas sem prévio consentimento por escrito da Prime. Todos os direitos reservados. Copyright 2007 Prime Equipment Group, Inc.

Material:	SEE BOM/DETAILS	ROCKET SET, 10', 3' PIPING, 010	
Finish:	SEE BOM/DETAILS		
Heat Treat:	SEE BOM/DETAILS	Part Number	Rev.
Drawn By:	tmechl	B	49915
Created:	9/22/2016	Class: -	SHEET 1 OF 1

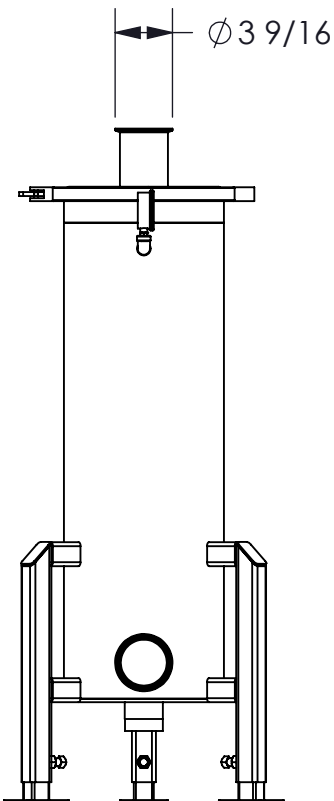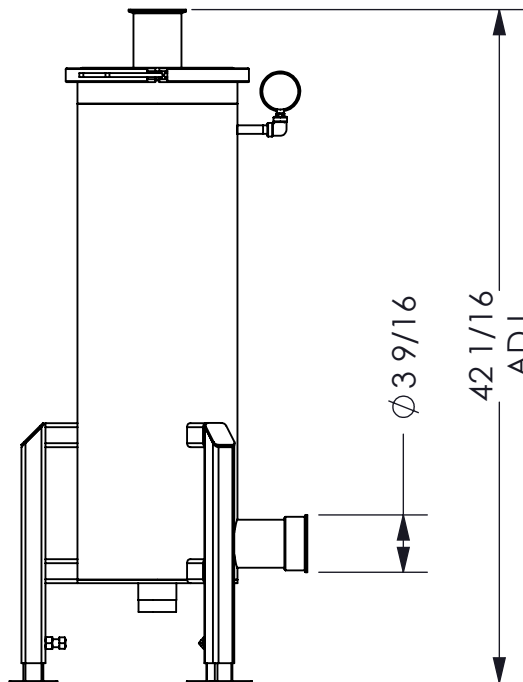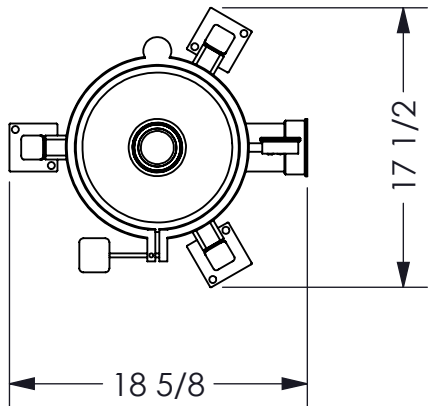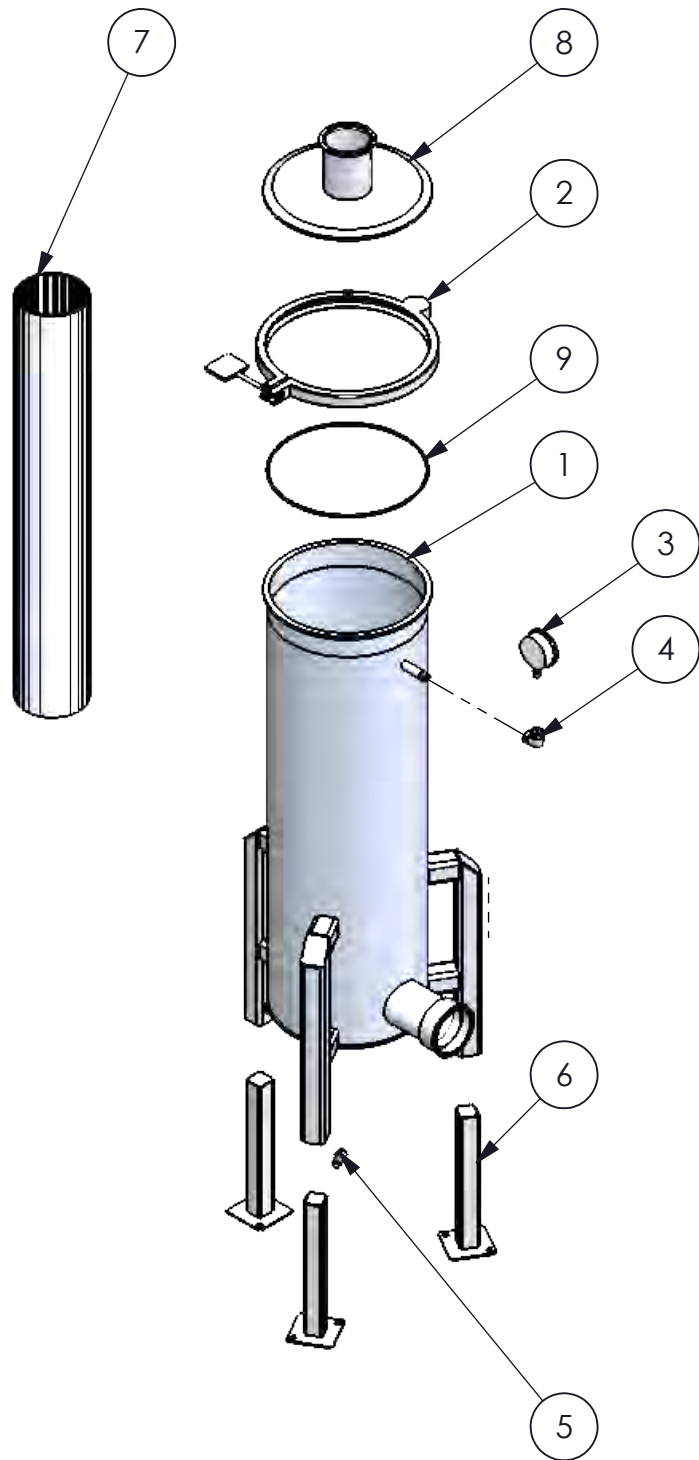

9	1	29173	GASKET,10",MAGNETIC,BUNA
8	1	48755	TOP WLDMT,ROCKET,10IN,NEW
7	1	70607	FILTER,0.010",LFS-116,CANISTER
6	3	20133	LEG ADJUSTER,10IN
5	3	18490	SQHD CUPPOINT SETSCREW 1/2-13X1SS
4	1	SSELB0.25X90DEGNPT	SSELB0.25X90DEGNPT
3	1	GAGEPRES0.25	GAUGE PRESSURE .25NPT 0-200 PSI
2	1	25888	CLAMP,10IN,SANITARY,HD
1	1	48759	ROCKET WLDMT,10IN/3IN PIPING,NEW
ITEM NO.	QTY.	PART NUMBER	Description

	-	tmeahl	9/22/2016	INITIAL RELEASE
Revision	ECN #	By	Date	Description of Change
Current Revision Information				
DIMENSIONS ARE IN INCHES 1 inch = 25.4 mm			TOLERANCES, UNLESS NOTED X.XX ±0.01 FRACT ±1/16 X.XXX ±0.005 ANGLE ±0.05°	
			SURFACE FINISH 250 MICROINCH. BREAK ALL SHARP EDGES 0.015. CONCENTRICITY 0.01 TIR.	
SPECIFICATIONS UNLESS OTHERWISE NOTED				

PRIME
Equipment Group, Inc.

This document may contain trade secrets and confidential information that is the sole property of Prime Equipment Group, Inc. (Prime). Prime reserves all patent, copyright, trademark and other intellectual property rights in information contained in this document. Recipients of this document are NOT authorized to use, reproduce, copy, disclose or transmit, in whole or in part, the information contained herein without the prior written consent of Prime. All rights reserved. Copyright 2007 Prime Equipment Group, Inc.

Este documento pode conter segredos comerciais e informações confidenciais que é propriedade exclusiva da Prime Equipment
todas as patentes, direitos autorais, marcas
Os destinatários deste documento NÃO são divulgar ou transmitir, no todo ou em parte, consentimento por escrito da Prime. Todos os direitos reservados. Copyright 2007 Prime Equipment Group, Inc.

Material:	SEE BOM/DETAILS SEE BOM/DETAILS	ASSY, 10IN ROCKET FILTER, 3IN, .010		
Finish:	SEE BOM/DETAILS			
Heat Treat:	SEE BOM/DETAILS	Size	Part Number	Rev.
Drawn By:	tmeahl	B	49914	
Created:	9/22/2016	Class:	SHEET 1 OF 1	

CONTROLS AND ELECTRICAL SCHEMATICS

[illegible]

2000 E. Fulton Street
Columbus, OH 43205 USA



Please call
+1 (614) 253-8590



Send us an email
Sales@PrimeEquipmentGroup.com



More info
PrimeEquipmentGroup.com

SPARE PARTS LIST

To order spares call 614.253.8590

Email: sales@primeequipmentgroup.com

Refer to serial number SN7928

Refer to model number: LFS-116

Although many parts may seem similar between 2 machines, due to wear and adjustments they become machine specific. You will cause damage to your machine if you swap parts with other machines

LFS-116			
ORDER	PART #	DESCRIPTION	QTY.
	18465	LATCH, CABINET	2
	18479	DRUM WHEEL ONLY	7
	20005	WATER DIVERTER ASSY	1
	70728	GEAR MOTOR	1
	70980	NOZZLE, 1/4 SS SPRAY JET	20
	71563	DRUM WHEEL AND BEARING	7
	49848	PUMP, SANITARY, 20HP	1
	49914	ROCKET AND FILTER ASSEMBLY	2
	70607	ROCKET FILTER (0.010)	2
	29173	GASKET	2

TECHNICAL PARTS INFORMATION INDEX

Number	Description
70728	GEARMOTOR



2000 E. Fulton Street
Columbus, OH 43205 USA



Please call
+1 (614) 253-8590



Send us an email
Sales@PrimeEquipmentGroup.com



More info
PrimeEquipmentGroup.com

Parts List

AC motor


DR.71S+M/FG/FM/2W/C/AL/LN/Z

Gear unit version

08 114 11 05

PART#

70728

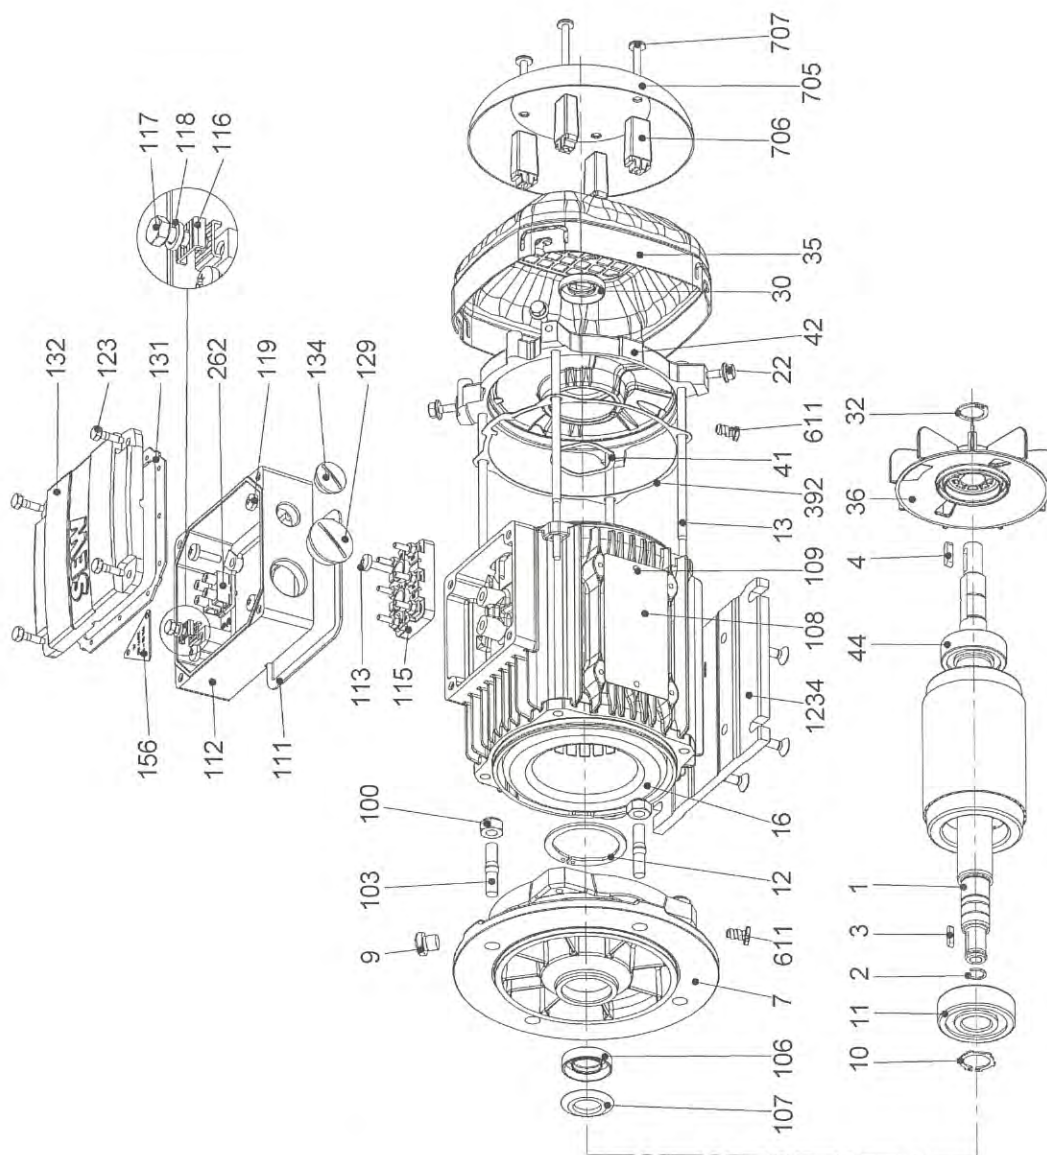

PRIME EQUIPMENTGROUP
PART NUMBER 70728

Parts List

08 114 11 05



AC motor

DR.71S+M/FG/FM/2W/C/AL/LN/Z

Gear unit version

EN Page 2 / 3

EM 27.06.2014

No.	Description	Additional specifications	SEW standard label	Part No.	Qty.
1	Rotor			*	1
2	Snap ring	for pinion shaft end 10 b)	W4173 SW10x1-FS	00115193	1
2	Snap ring	for pinion shaft end 12 b)	W4173 SW11x1-FS	00115207	1
3	Key	for pinion shaft end 10	DIN6885-1 A2x2x12 +C	00100005	1
3	Key	for pinion shaft end 12	DIN6885-1 A3x3x14 +C	00100692	1
4	Key	2W	DIN6885-1 A4x4x16 +C	00135232	1
7	Flange	AL; a)	FG100 D120	01844768	1
7	Flange	GG; a)	FG100 D120	13613014	1
7	Flange	AL; a)	FG130 D160	01844784	1
7	Flange	GG; a)	FG130 D160	13613030	1
7	Flange	a)	FG165 D200	13615106	1
7	Flange	a)	FG215 D250	13612662	1
7	Flange	a)	FG265 D300	13615122	1
9	Screw plug	for flange FG100, FG130 a)	W4085 B-M10x1-St-ADC3K-	0011426X	1
9	Screw plug	for flange FG165, FG215 a)	W4085 B-M12x1,5-St-	00114308	1
9	Screw plug	for flange FG265 a)	W4085 B-M22x1,5-St-	00114316	1
10	Retaining ring	a)	DIN983 17x1-FS	0011460X	1
11	Deep groove ball bearing	a)	6303-2Z-C3-K52	13236563	1
12	Retaining ring	a)	DIN472 47x1,75-FS	00103187	1
13	Machine screw	DR.71S	W4018 M5x131-6.8-ADB3	13237160	4
13	Machine screw	DR.71M	W4018 M5x156-6.8-ADB3	13237179	4
16	Stator			*	1
22	Hex head screw		EN1665 A-M5x10-8.8-A2F	13237616	4
30	Oil seal	with Item no. 998	W BAOFSF16x28x6/7-NBR	13262041	1
30	Oil seal	with Item no. 998; for 2-pole version	W BAOFSF16x28x6/7-FKM	13262351	1
32	Retaining ring		DIN471 15x1-FS	00102679	1
35	Fan Guard			13610503	1
35	Fan Guard	2W		13614487	1
35	Fan Guard	LN		13611690	1
36	Fan		D=101	13611550	1
36	Aluminum fan	AL	D=112	13611968	1
36	High Inert.Flywheel	Z	J=0,00213 kgm²	13640542	1
41	Equalizing ring		W4253 33x39,1x0,5	00115894	1
42	B bearing end shield	AL		13640712	1
42	B bearing end shield	GG		13639250	1
44	Deep groove ball bearing		6203-2Z-C3-K52	13236601	1
100	Hexagon nut	for flange FG100 AL a)	EN1661 M6-8-A2F	19052677	4
100	Hexagon nut	for flange FG100 GG a)	ISO4032 M6-8-St-A2F	00101982	4
100	Hexagon nut	for flange FG130 AL a)	EN1661 M8-8-A2F	13309722	4
100	Hexagon nut	for flange FG130 GG a)	ISO4032 M8-8-St-A2F	00101990	4
100	Hexagon nut	for flange FG165 a)	ISO4032 M10-8-St-A2F	00102008	4
100	Hexagon nut	for flange FG215, FG265 a)	ISO4032 M12-8-St-A2F	00102016	4
103	Stud	for flange FG100 a)	DIN939 M6x18-8.8-A2F	00134074	4
103	Stud	for flange FG100, gear unit housing AL, a)	W4061 M6x18-8.8-A2F	00132918	4
103	Stud	for flange FG130 a)	DIN939 M8x20-8.8-A2F	00100749	4
103	Stud	for flange FG130, gear unit housing AL, a)	DIN835 M8x20-8.8-A2F-MV	13262572	4
103	Stud	for flange FG165 a)	DIN939 M10x22-8.8-A2F	00118451	4
103	Stud	for flange FG215, FG265 a)	DIN939 M12x30-8.8-A2F	00100811	4
106	Oil seal	a)	W A17x30x7-NBR	00106062	1
106	Oil seal	a) for 2-pole version	W A17x30x7-FKM-FKO	13225820	1
107	Oil flinger	a)	W4291 17-A2F	00116602	1
108	Nameplate			*	1
109	Grooved Pin		ISO8746 2x4-A-Niro	00107646	2

Parts List

08 114 11 05



AC motor


DR.71S+M/FG/FM/2W/C/AL/LN/Z

Gear unit version


EN Page 3 / 3

EM 27.06.2014


No.	Description	Additional specifications	SEW standard label	Part No.	Qty.
111	Gasket for lower part			01355635	1
112	Terminal box lower part		1x M25x1,5 ; 1x M16x1,5	13610570	1
112	Terminal box lower part		2x NPT 1/2"-14	13612018	1
113	Screw	parts included in stator complete	W4041 CE-M5x16-TX-A2F-GM1	00130591	1
115	Terminal Block	parts included in stator complete	W4720 KTM4-4.08-AS-KB-	13226193	1
116	Terminal clip			00104426	2
117	Screw		W4041 DE-S-M5x16-A2F-GM1	13237136	1
118	Lock washer		DIN7980 5-A2	00118206	1
119	Screw		W4041 CE-M5x16-TX-SZ-A2F-GM1	00130591	4
123	Screw		W4041 DE-S-M5x16-A2F-GM1	13237136	4
129	Screw plug		W4411 M25x1,5-PA6.6GF30-	00131385	1
129	Screw plug	for NPT thread 1/2"	W4411 M20x1,5-PA6.6GF30-	13256300	2
131	Gasket for cover			01355627	1
132	Terminal Box Cover			13611763	1
134	Screw plug		W4411 M16x1,5-PA6.6GF30-	00131334	1
156	Identification	for TF version	W4499 - TF	01366815	1
262	Terminal clip	2 pole		01823183	1
392	Gasket			13749056	1
611	Drain hole plug	DH		13618865	*
705	Protection canopy	C		13611623	1
706	Distance support	C		13618598	4
707	Pan head screw	C	W4036 REMFORM-6,0x35-TX-VZ	13262599	4
998	Synthetic grease	for Item no. 30	Klüber Petamo GHY133N	04963458	X)
1234	Bed plate kit	DR.71S FM	H=71; AxB=112x90	17534488	1
1234	Bed plate kit	DR.71M FM	H=71; AxB=112x90	17534585	1
1234	Bed plate kit	DR.71M FM80M	H=80; AxB=125x100	17534682	1
1439	Earth/gr.termin.complete	Kit		13633953	1





R17..

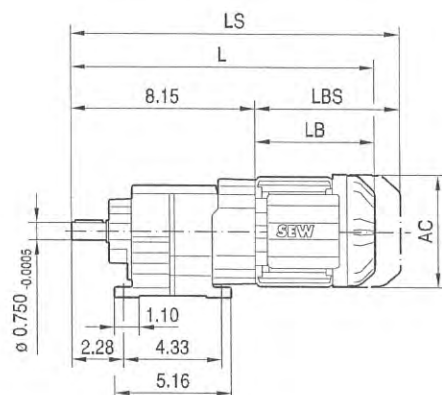



01 030 00 09

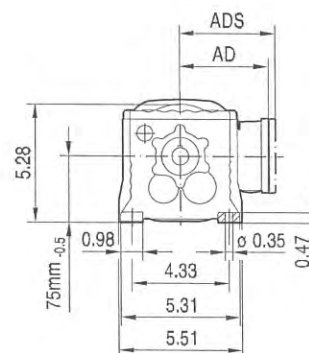


DR80..



R17F..



DR80..



(→ 125)	DR63..	DR71S	DR71M	DR80S	DR80M		
AC	5.20	5.47	5.47	6.14	6.14		
AD	4.13	4.69	4.69	5.04	5.04		
ADS	4.13	5.08	5.08	5.47	5.47		
L	14.02	14.45	15.43	15.83	17.05		
LS	16.18	17.13	18.11	19.02	20.24		
LB	5.87	6.30	7.28	7.44	8.66		
LBS	8.03	8.98	9.96	10.63	11.85		

Parts List


Helical gear unit
R17

01 253 11 98

SEW
EURODRIVE

EN Page 1 / 3
EG 06.07.2012

3-stage

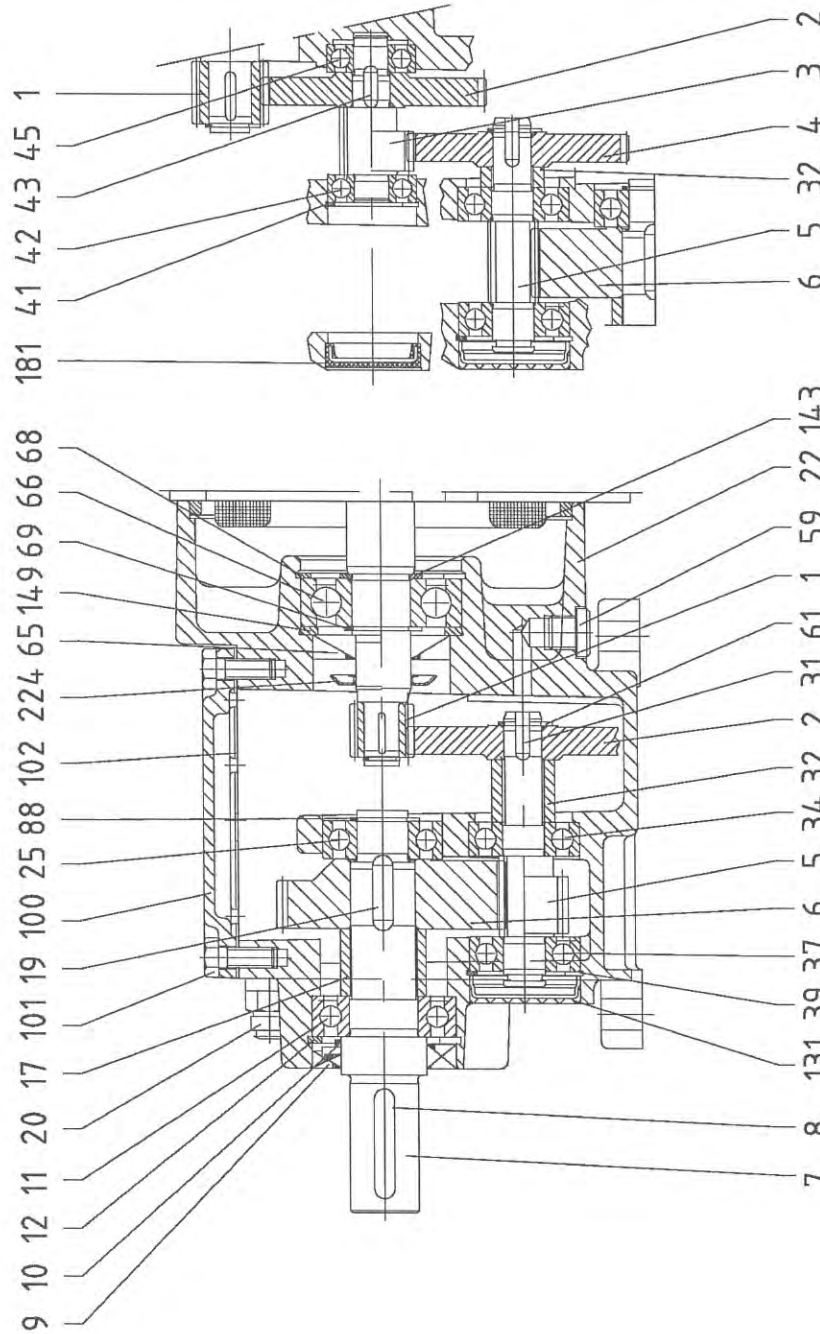

2-stage

Parts List

Helical gear unit
R17

01 253 11 98



EN Page 2 / 3
EG 06.07.2012

No.	Description	Additional specifications	SEW standard label	Part No.	Qty.
1	Pinion			*	1
2	Gear			*	1
3	Pinion shaft			*	1
4	Gear			*	1
5	Pinion shaft			*	1
6	Gear			*	1
7	Output shaft		Ø 20x40 mm	06414362	1
7	Output shaft	stainless; ASEPTICplus	Ø 20x40 mm	00452483	1
7	Output Shaft (inch)		Ø 0,750x1,57 in.	06414389	1
8	Key		DIN6885-1 A6x6x32 +C	00100153	1
8	Key	stainless; ASEPTICplus	DIN6885-1 A6x6x32 Niro	13228161	1
8	Key (inch)		W4190 B3/16x3/16x1-1/16 +C	08069204	1
9	Oil seal		W BASF25x42x6/4,5-NBR	00177458	1
9	Oil seal	optional oil seal in FKM (Viton); ATEX model according to category II2G, II2D, II3G, II3D; ASEPTICplus	W BASF25x42x6/4,5-FKM	00177423	1
10	Oil seal	Double sealing as an option; ATEX model according to category II2G, II2D, II3G, II3D; ASEPTICplus	W B1SF25x37x4,6/6,6-FKM	00177377	1
11	Deep groove ball bearing		6004-Z	00117447	1
12	Circlip		DIN472 42x1,75-FS	00103179	1
17	Spacer tube		Ø20,6xØ25x19,5 mm	06414400	1
19	Key		DIN6885-1 B6x6x16 55HRC	00116017	1
20	Breather valve		W4087 M10x1-CuZn-HEI	00130303	1
20	Breather valve	stainless; ASEPTICplus	W4087 M10x1-Niro-HEI	00136239	1
22	Gear Housing	mounting DR63/71; DT63/71/80		06414168	1
22	Gear Housing	mounting DR80		06415342	1
25	Deep groove ball bearing		6202	0010485X	1
31	Key		DIN6885-1 B4x4x8 55HRC	00134899	1
32	Spacer tube	2-stage	Ø12xØ18x18 mm	06414419	1
32	Spacer tube	3-stage	Ø12xØ18x6,5 mm	06414427	1
34	Deep groove ball bearing		6201	00104841	1
37	Deep groove ball bearing		6201	00104841	1
37	Deep groove ball bearing	Only for mounting positions M2, MX	6201-Z	00112828	1
39	Circlip		DIN472 32x1,2-FS	00103136	1
41	Circlip		DIN472 26x1,2-FS	00130087	1
42	Deep groove ball bearing		6000	00104744	1
43	Key		DIN6885-1 B4x4x8 55HRC	00134899	1
45	Deep groove ball bearing		6000	00104744	1
59	Screw plug		W4085 M10x1-St-ADC3K	0011426X	1
61	Circlip		DIN471 11x1-FS	00102644	1
65	Oil seal	mounting DR63/71; DT63/71/80	W A17x40x7-NBR	00120774	1
65	Oil seal	mounting DR80	W A20x47x7-NBR	00106097	1
65	Oil seal	optional oil seal in FKM (Viton); ATEX model according to category II2G, II2D, II3G, II3D; ASEPTICplus; when installing a 2-pole motor; mounting DR63/71; DT63/71/80	W A17x40x7-FKM-FKO	19076487	1
65	Oil seal	optional oil seal in FKM (Viton); ATEX model according to category II2G, II2D, II3G, II3D; ASEPTICplus; when installing a 2-pole motor; mounting DR80	W A20x47x7-FKM-FKO	19077858	1
66	Deep groove ball bearing	mounting DR63/71; DT63/71/80	6303-2Z-C3-K08	13236563	1
66	Deep groove ball bearing	mounting DR63/71; DT63/71/80; For ambient temperatures > 80°C	6303-2Z-C3-K17	00170070	1

Parts List

Helical gear unit
R17

01 253 11 98



EN Page 3 / 3
EG 06.07.2012

No.	Description	Additional specifications	SEW standard label	Part No.	Qty.
66	Deep groove ball bearing	mounting DR63/71; DT63/71/80; ATEX model according to category II2G, II2D, II3G, II3D; For ambient temperatures < -20°C	6303-2RS-C3-K24	00160857	1
66	Deep groove ball bearing	mounting DR80	6304-2Z-C3-K08	13239910	1
66	Deep groove ball bearing	mounting DR80; For ambient temperatures > 80°C	6304-2Z-C3-K17	13268236	1
66	Deep groove ball bearing	mounting DR80; ATEX model according to category II2G, II2D, II3G, II3D; For ambient temperatures < -20°C	6304-2RS-C3-K24	13260669	1
68	Circlip	mounting DR63/71; DT63/71/80	DIN472 47x1,75-FS	00103187	1
68	Circlip	mounting DR80	DIN472 52x2-FS	00103195	1
69	Circlip	mounting DR63/71; DT63/71/80	DIN471 17x1-FS	00102695	1
69	Circlip	mounting DR80	DIN471 20x1,2-FS	00102717	1
88	Circlip		DIN471 15x1-FS	00102679	1
100	Gearcase cover			06414346	1
101	Hex head screw		ISO4017 M6x16-8.8-A2F	00101052	8
102	Gasket			06414354	1
131	Closing cap		W4300 1-32x8	00124982	1
143	Supporting disc	mounting DR63	DIN988 S17x24x1,5-FS	00103411	1
149	Supporting disc	mounting DR63/71; DT63/71/80	DIN988 S37x47x2,5-FS	00103519	1
149	Supporting disc	mounting DR80	DIN988 S42x52x2,5-FS	00103632	1
181	Closing cap		W4300 1-28x7	00106887	1
224	Oel finger	mounting DR63/71; DT63/71/80	W4291 17-A2F	00116602	1
224	Oel finger	mounting DR80	W4291 20-A2F	00116610	1

Parts List

08 220 04 06

SEW
EURODRIVE


AC motor, AC brake motors

DR.71-132/+BE


additional list : Terminal box

EN Page 1 / 3
EM 11.07.2013

Terminal box gray-cast iron

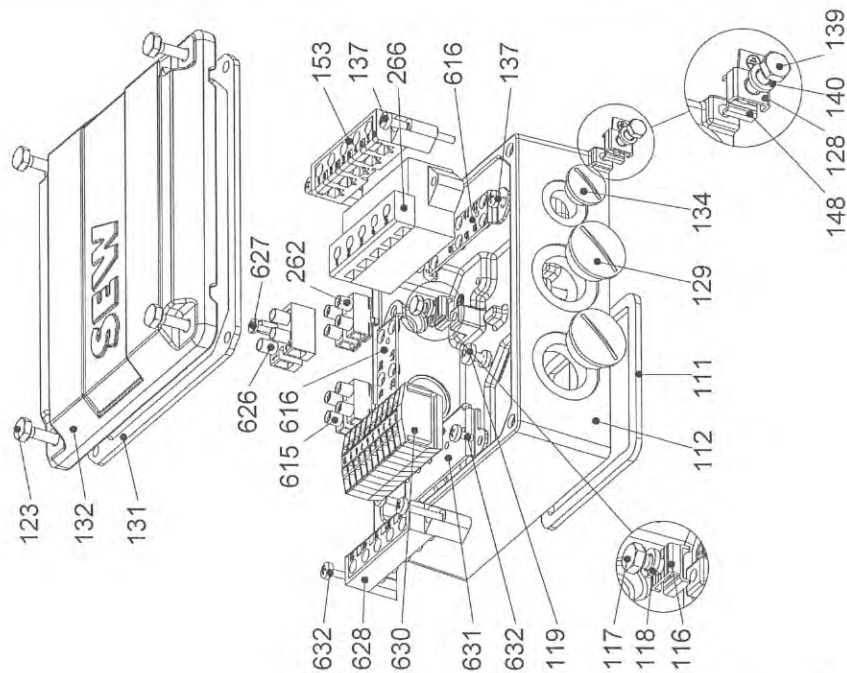

Terminal box aluminum

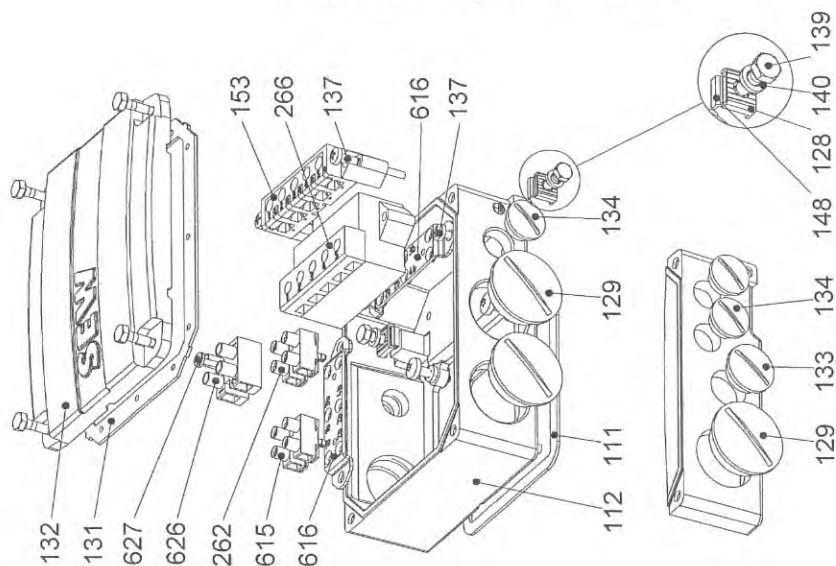

Parts List

08 220 04 06



AC motor, AC brake motors

DR.71-132/+BE

additional list : Terminal box

EN Page 2 / 3

EM 11.07.2013

No.	Description	Additional specifications	SEW standard label	Part No.	Qty.
111	Gasket for lower part	gray-cast iron	DR.71-132	13610627	1
111	Gasket for lower part	aluminum ; Tu >80°C; Ex	DR.71-132	13613472	1
112	Terminal box lower part	DR71-90BE; aluminum	3x M25x1,5 / 2x M16x1,5	13614215	1
112	Terminal box lower part	DR71-90BE; aluminum	5x NPT1/2"-14	13614843	1
112	Terminal box lower part	DR100-132BE; aluminum	3x M32x1,5 / 2x M16x1,5	13614231	1
112	Terminal box lower part	DR100-132BE; aluminum	2x NPT3/4"-14 / 3x NPT1/2"-14	13617729	1
112	Terminal box lower part	DR71-90; gray-cast iron	2x M25x1,5 / 1x M16x1,5	13614797	1
112	Terminal box lower part	DR71-90; gray-cast iron	4x M25x1,5 / 2x M16x1,5	13614193	1
112	Terminal box lower part	DR71-132BE; aluminum	1xM32x1,5/1xM20x1,5/2xM16x1,5	16227956	1
112	Terminal box lower part	DR71-90; gray-cast iron	3x NPT1/2"-14	13614878	1
112	Terminal box lower part	DR71-90; gray-cast iron	6x NPT1/2"-14	13614851	1
112	Terminal box lower part	DR100-132; gray-cast iron	2x M32x1,5 / 1x M16x1,5	13610619	1
112	Terminal box lower part	DR100-132; gray-cast iron	4x M32x1,5 / 2x M16x1,5	13617702	1
112	Terminal box lower part	DR100-132; gray-cast iron	1x NPT3/4"-14 / 2x NPT1/2"-14	13614886	1
112	Terminal box lower part	DR100-132; gray-cast iron	2x NPT3/4"-14 / 4x NPT1/2"-14	13617710	1
116	Terminal clip			00104426	2
117	Screw		W4041 DE-S-M5x16-A2F-GM1	13237136	1
117	Hex head screw	for Terminal box gray-cast iron	ISO4017 M5x12-A2-70	00118516	1
118	Lock washer		W4146 5-A2	00118206	1
119	Screw	for Terminal box gray-cast iron	W4041 CE-M5x20-TX-SZ-A2F-GM1	00135739	4
123	Hex head screw	for Terminal box gray-cast iron	ISO4017 M6x20-8.8-A2F	00101079	4
128	Terminal clip		DIN46282 D10-MS-VN	00104434	1
129	Screw plug	DR.71-90	W4411 M25x1,5-PA6.6GF30-	00131385	X)
129	Screw plug	DR.100-132	W4411 M32x1,5-PA6.6GF30-	00131393	X)
129	Screw plug	DR71-90; for NPT thread 1/2"	W4411 M20x1,5-PA6.6GF30-	13256300	X)
129	Screw plug	DR100-132; for NPT thread 3/4"	W4411 M25x1,5-PA6.6GF30-	13256319	X)
131	Gasket for cover	aluminum ; Tu >80°C; Ex	DR.71-132	13613480	1
131	Gasket for cover	aluminum ; Tu >80°C; Ex	DR.71-132BE	13613464	1
131	Gasket for cover	gray-cast iron	DR.71-132	13614290	1
132	Terminal box cover neutral	aluminum	DR.71-132	01355597	1
132	Terminal box cover neutral	aluminum	DR.71-132BE	01355651	1
132	Terminal Box Cover	gray-cast iron	DR.71-132	13613081	1
133	Screw plug		W4411 M20x1,5-PA6.6GF30-	00131342	X)
134	Screw plug	DR.71-132	W4411 M16x1,5-PA6.6GF30-	00131334	X)
134	Screw plug	DR.100-132; for NPT thread 1/2"	W4411 M20x1,5-PA6.6GF30-	13256300	X)
137	Screw	for Item no. 266 or 153	DIN7500 CE-M4x20-H-A2F-GM1	00131075	2
137	Screw	for Item no. 266 with 153	DIN7500 CE-M4x35-H-A2F-GM1	00131040	2
137	Screw	for Item no. 616	DIN7500 CE-M4x8-H-A2F-GM1	00131032	2
139	Screw		W4041 DE-S-M5x16-A2-70-GM1	13262564	1
139	Hex head screw	for Terminal box gray-cast iron	ISO4017 M5x12-A2-70	00118516	1
140	Lock washer		W4146 5-A2	00118206	1
148	Terminal clip			00104426	1
151	Pan-head Screw	for Item no. 630	ISO7045 M3x8-4.8-H-A2F	13225782	2
153	Terminal strip complete		1f-5f	18211011	1
153	Terminal strip complete		1b-5b	13614223	1
262	Terminal clip	2 pole		01823183	1
266	Empty Housing		1h-5h	18211038	1
266	Empty Housing		1b-5b	13621696	1
615	Terminal clip	2 pole		01823183	1
616	Fixing sheet		1a-4a	13617761	1
616	Fixing sheet		1e-4e	13617559	1
626	Terminal	only for R76+BSR	W4602 341-2-E-X2-6	13244965	1

Parts List

08 220 04 06



AC motor, AC brake motors

DR.71-132/+BE

EN Page 3 / 3

EM 11.07.2013

additional list : Terminal box

No.	Description	Additional specifications	SEW standard label	Part No.	Qty.
627	Tapping screw	only for R76+BSR	ISO7049 ST3,5x19-C-H-A1E	00117013	1
628	Terminal strip complete		1f-5f	18211011	1
628	Terminal strip complete		1b-5b	13614223	1
630	Terminal	1-10		13639110	1
631	Fixing sheet	for Item no. 630		13638718	1
632	Screw	for Item no. 628	DIN7500 CE-M4x20-H-A2F-GM1	00131075	2
632	Screw	for Item no. 631	DIN7500 CE-M4x8-H-A2F-GM1	00131032	2
998	Terminal box lower part assembled	1), DR.71-90; aluminum	1x M25x1,5 / 1x M16x1,5	04111117	1
998	Terminal box lower part assembled	1), DR.71-90; aluminum	2x NPT1/2"-14	04111125	1
998	Terminal box lower part assembled	1), DR.100-132; aluminum	1x M32x1,5 / 1x M16x1,5	04111133	1
998	Terminal box lower part assembled	1), DR.100-132; aluminum	1x NPT3/4"-14 / 1x NPT1/2"-14	04111141	1
998	Terminal box lower part assembled	1), DR.71-90BE; aluminum	2x M25x1,5 / 1x M16x1,5	04111214	1
998	Terminal box lower part assembled	1), DR.71-90BE; aluminum	3x NPT1/2"-14	04111222	1
998	Terminal box lower part assembled	1), DR.100-132BE; aluminum	2x M32x1,5 / 1x M16x1,5	04111230	1
998	Terminal box lower part assembled	1), DR.100-132BE; aluminum	1x NPT3/4"-14 / 2x NPT1/2"-14	04111249	1
998	Terminal box lower part assembled	2), DR.71-90; gray-cast iron	2x M25x1,5 / 1x M16x1,5	04111257	1
998	Terminal box lower part assembled	2), DR.71-90; gray-cast iron	3x NPT1/2"-14	04111311	1
998	Terminal box lower part assembled	2), DR.100-132; gray-cast iron	2x M32x1,5 / 1x M16x1,5	04111338	1
998	Terminal box lower part assembled	2), DR.100-132; gray-cast iron	1x NPT3/4"-14 / 2x NPT1/2"-14	04111346	1
999	Terminal box cover complet	3), DR.71-132; aluminum		04111354	1
999	Terminal box cover complet	3), DR.71-132BE; aluminum		04111419	1
999	Terminal box cover complet	3), DR.71-132; gray-cast iron		04111427	1


Dimension Comparison – DR & DT/DV Motors

4-2010
Replaces: M-111-01

DT/DV Series Motor	DRS Series Standard Efficiency	DRE Series High Efficiency	DRP Series PREMIUM Efficiency	Power [Hp]	Power [kW]	DT/DV/DR		DRS		DRE		DRP		New Standard vs. DT/DV	
						Length	w/BMG	Length	w/BE	Length	w/BE	Length	w/BE	Length	Dia.
DT56M4	-	-	-	0.13	0.09	136	172	-	-	-	-	-	-	-	-
DR63S4	-	-	-	0.15	0.12	187	242	-	-	-	-	-	-	-	-
DT56L4	-	-	-	0.2	0.15	136	172	-	-	-	-	-	-	-	-
DR63M4	-	-	-	0.25	0.18	187	242	-	-	-	-	-	-	-	-
DT71K4	DRS71S4	-	-	0.25	0.18	202	266	198	266	139	139	-	-	+11	+24
DR63L4	-	-	-	0.33	0.25	187	242	198	266	139	139	-	-	-4	0
DT71C4	DRS71S4	-	-	0.33	0.25	202	266	198	266	139	139	-	-	+11	+24
DT71D4	DRS71S4	-	-	0.5	0.37	202	266	198	266	139	139	-	-	-4	0
DT80K4	DRS71M4	-	-	0.75	0.55	252	316	223	291	139	139	-	-	-4	0
DT80N4	DRS80S4	-	-	1.0	0.75	252	316	241	322	156	156	-	-	-29	-25
DT90S4	DRS80M4	DRP90M4	DRP90M4	1.5	1.1	257	342	272	353	179	179	266	359	+20	+37
DT90L4	DRS90M4	DRP90L4	DRP90L4	2.0	1.5	257	342	272	353	179	179	286	379	+9	+17
DT100LS4	DRS90L4	DRP100L4	DRP100L4	3.0	2.2	311	396	286	379	179	179	286	379	+29	+37
DT100M4	DRS100M4	DRP100M4	DRP100M4	3.0	2.2	341	426	316	409	197	197	352	464	+41	+43
DT100L4	DRS100L4	DRP100L4	DRP100L4	5.0	3.7	341	426	316	409	197	197	387	499	+5	+13
DT112M4	DRS112M4	DRP112M4	DRP112M4	5.4	4.0	349	429	346	439	197	197	387	499	+5	+13
DT132S4	DRS132S4	DRP132S4	DRP132S4	7.5	5.5	394	474	387	499	221	221	460	597	+38	+70
DT132M4	DRS132M4	DRP132M4	DRP132M4	10	7.5	407	519	437	549	221	221	460	597	+43	+75
DT132ML4	DRS132ML4	DRP132ML4	DRP132ML4	12.5	9.2	462	574	437	549	221	221	460	597	+30	+54
DT160M4	DRS160M4	DRP160M4	DRP160M4	15	11	482	574	460	597	272	272	460	597	-2	+23
DT160L4	DRS160L4	DRP160L4	DRP160L4	20	15	509	665	460	597	272	272	460	597	-2	+23
DT180M4	DRS180M4	DRP180M4	DRP180M4	25	18.5	581	737	540	739	317	317	540	739	+31	+74
DT180L4	DRS180L4	DRP180L4	DRP180L4	30	22	581	737	600	799	316	316	583	772	+19	+62
DT200L4	DRS200L4	DRP200L4	DRP200L4	40	30	616	772	600	799	317	317	600	799	+19	+62
DT225S4	DRS225S4	DRP225S4	DRP225S4	50	37	690	846	649	869	394	394	649	869	+33	+97
DT225M4	DRS225M4	DRP225M4	DRP225M4	60	45	690	846	649	869	394	394	699	919	-41	+23
DT250M4	DRS250M4	DRP250M4	DRP250M4	75	55	772	957	699	919	394	394	-	-	+9	+73
DT280S4	DRS280S4	DRP280S4	DRP280S4	100	75	772	957	699	919	394	394	-	-	0	0
DT280M4	DRS280M4	DRP280M4	DRP280M4	125	90	-	-	-	-	-	-	-	-	0	0
-	-	-	-	150	110	-	-	-	-	-	-	-	-	-	-
-	-	-	-	200	150	-	-	-	-	-	-	-	-	-	-
-	-	-	-	250	185	-	-	-	-	-	-	-	-	-	-
-	-	-	-	275	200	-	-	-	-	-	-	-	-	-	-
-	-	-	-	300	225	-	-	-	-	-	-	-	-	-	-

NOTES:

1. BLUE denotes USA standard motor
2. Copper rotor always selected for non-standard motor
3. All dimension units are metric [mm]
4. Dia. (diameter) dimension does not include conduit box
5. Longest flange selected for Length, w/BMG, and /BE dimensions
6. **New Standard vs. DT/DV** useful when replacing motors
7. RED = larger new dimension Δ, GREEN = smaller Δ

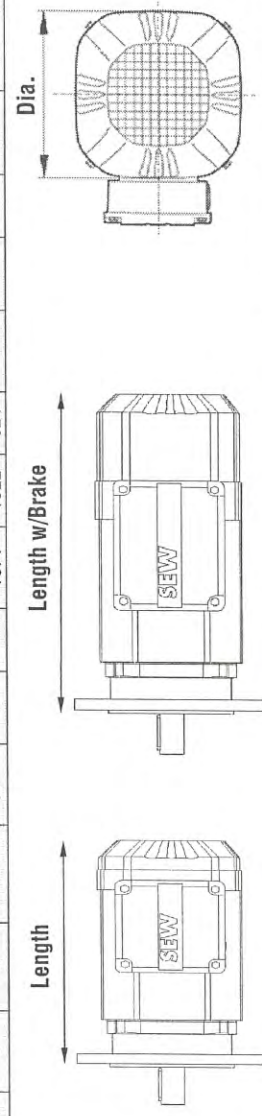

SEW
EURODRIVE

Technical Note

M-111-02

Page 1 of 1