
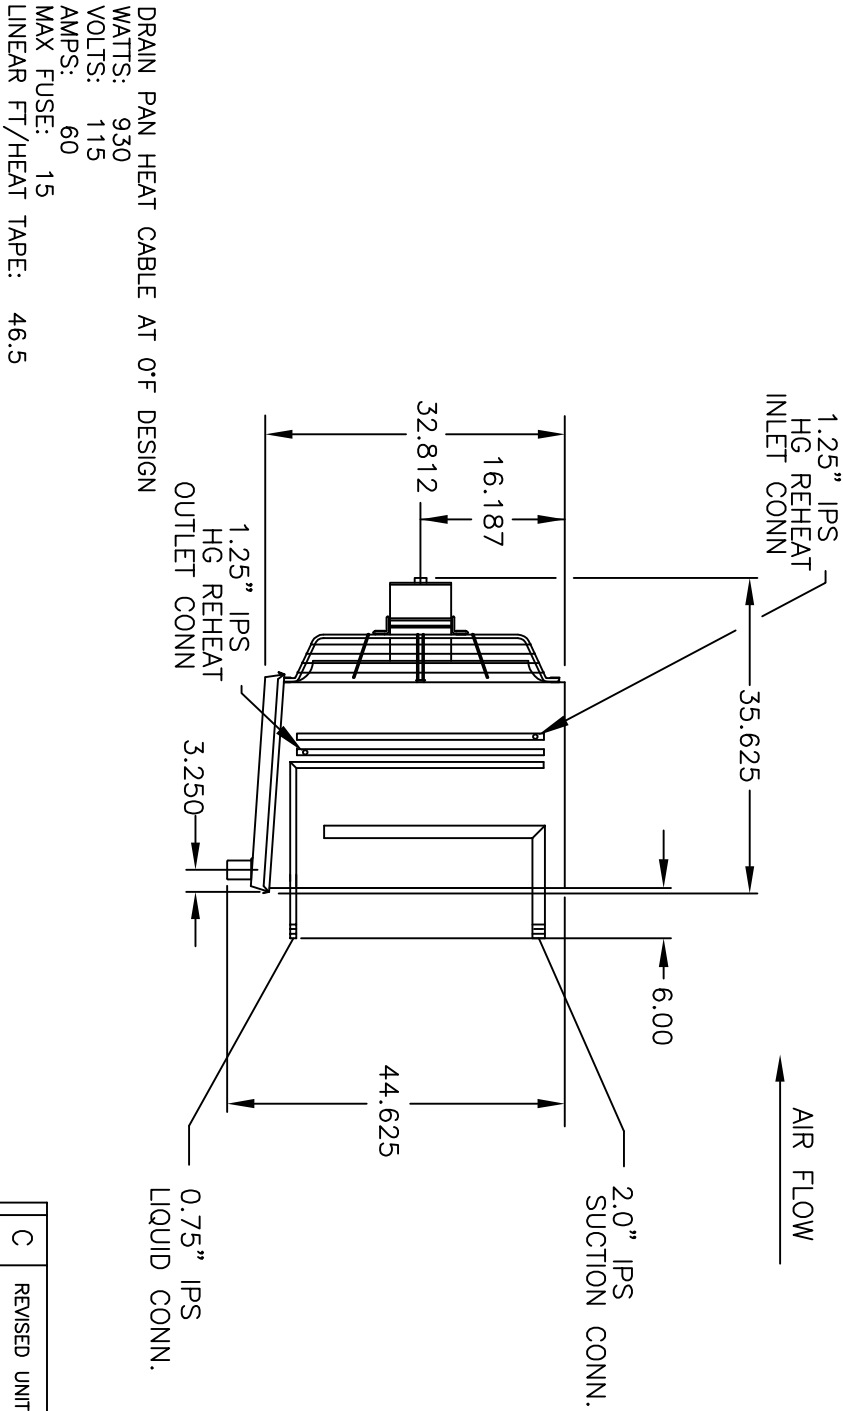


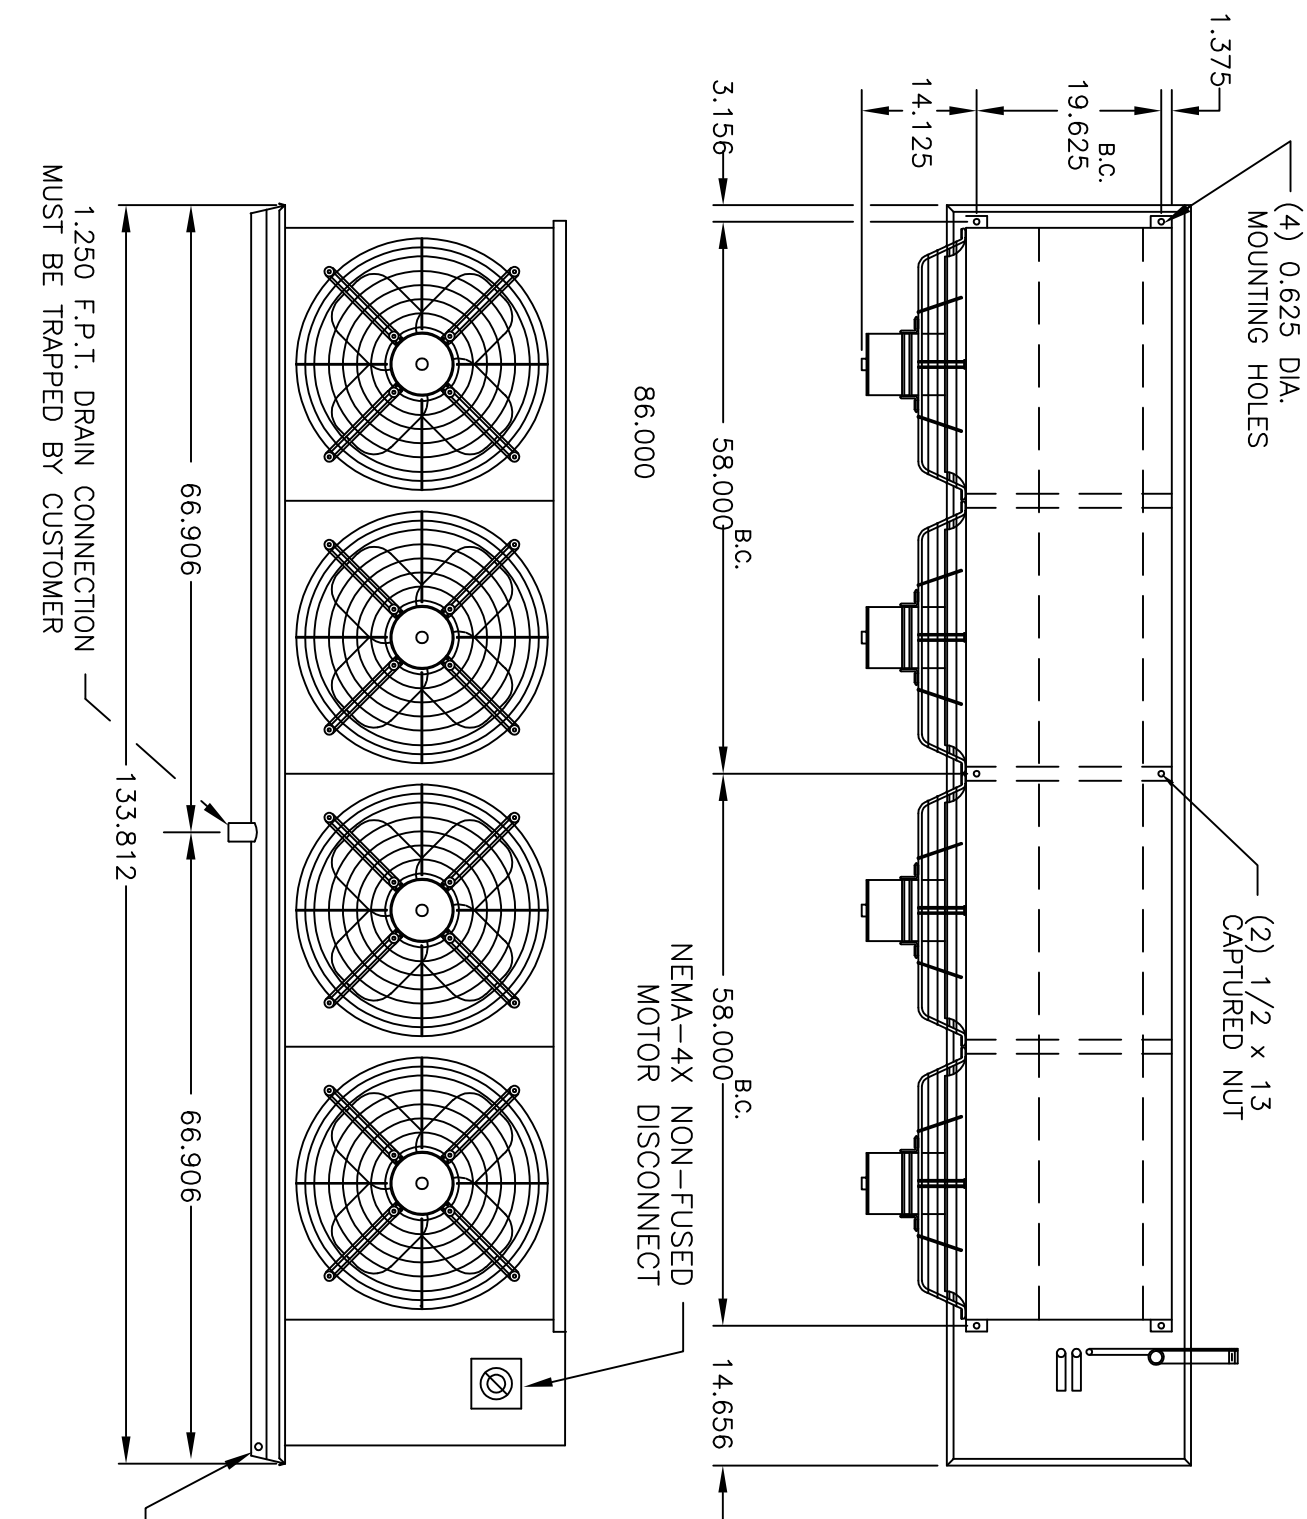

UNIT CONSTRUCTION
HOUSING: MILL GALVANIZED STEEL
DRAIN PAN: AIR DEFROST
STAINLESS STEEL INSULATED W/STAINLESS STEEL COVER
COIL: RECIRCULATED BOTTOM FEED
HOT GAS DEFROST
STAINLESS STEEL TUBING
ALUMINUM FINS
MOTORS: 1/3HP 460/3/60 1140 RPM

DESIGN SPECIFICATIONS		UNITS
UNIT COOLING CAPACITY	128,380	BTUH
ROOM TEMPERATURE	40	°F
SUCTION TEMPERATURE	26	°F
REFRIGERANT	R717	—
*LIQUID FEED RATE	1.6	GPM
AIR FLOW RATE	13880	CFM
EXTERNAL STATIC PRESSURE	0	INWG
NOMINAL FIN SPACING	3	FINS/IN
TOTAL SURFACE AREA	2004	SQ. FT
APPROXIMATE WEIGHT	1160	LBS
COIL INTERNAL VOLUME	3.1	CU. FT
* NOTE: LIQUID FEED PRESSURE MUST BE AT LEAST 5 PSIG ABOVE SUCTION PRESSURE.		

WORK TO DIMENSIONS
DO NOT SCALE DRAWING

C	REVISED UNIT & TAG	3/5 2021	JTL
B	REVISED # OF DISCON.	2/15 2021	TPJ
A	REVISED TAG UNIT	2/9 2021	TPJ

SALES ORDER:	10203188	LINE: 1	O	NO.	CHANGE DESCRIPTION	DATE	CHK'D
CUSTOMER P.O.:	CR2101G	27257		REVISIONS			
CUSTOMER NAME:	REPUBLIC REFRIGERATION						
JOB NAME:	WAYNE FARMS						
TAG UNIT:	DOCK AU-2A						
MODEL:	DT4B-1027-RBA-IHGC-HGR-RH						
ITEM NO.:	50202312						
NO. REQ'D:	1	DATE:	2/5/2021	DRAWN:	TPJ		
SHEET	1	OF	2				
TOLERANCE:	±0.50"						





REV.



UNIT ELECTRICAL NAMEPLATE DATA

MOTOR CIRCUIT

AMOUNT	VOLTS	HZ	PH	HP EACH	FLA EACH
4	460	60	3	1/3	0.85

MINIMUM CIRCUIT AMPACITY **3.63**


MAXIMUM OVERCURRENT PROTECTION **15**

NOTES:

- MOTORS IN COLD ROOMS MAY DRAW GREATER THAN NAMEPLATE AMPERAGE DUE TO HIGHER DENSITY OF COLD AIR.
- MOTORS HAVE AUTOMATIC RESET THERMAL OVERLOAD PROTECTION.
- └─── FIELD WIRING

—— FACTORY WIRING
- REFERENCE TERMINAL BLOCK MOUNTING ASSEMBLY KIT E322580A.

FAN MOTORS

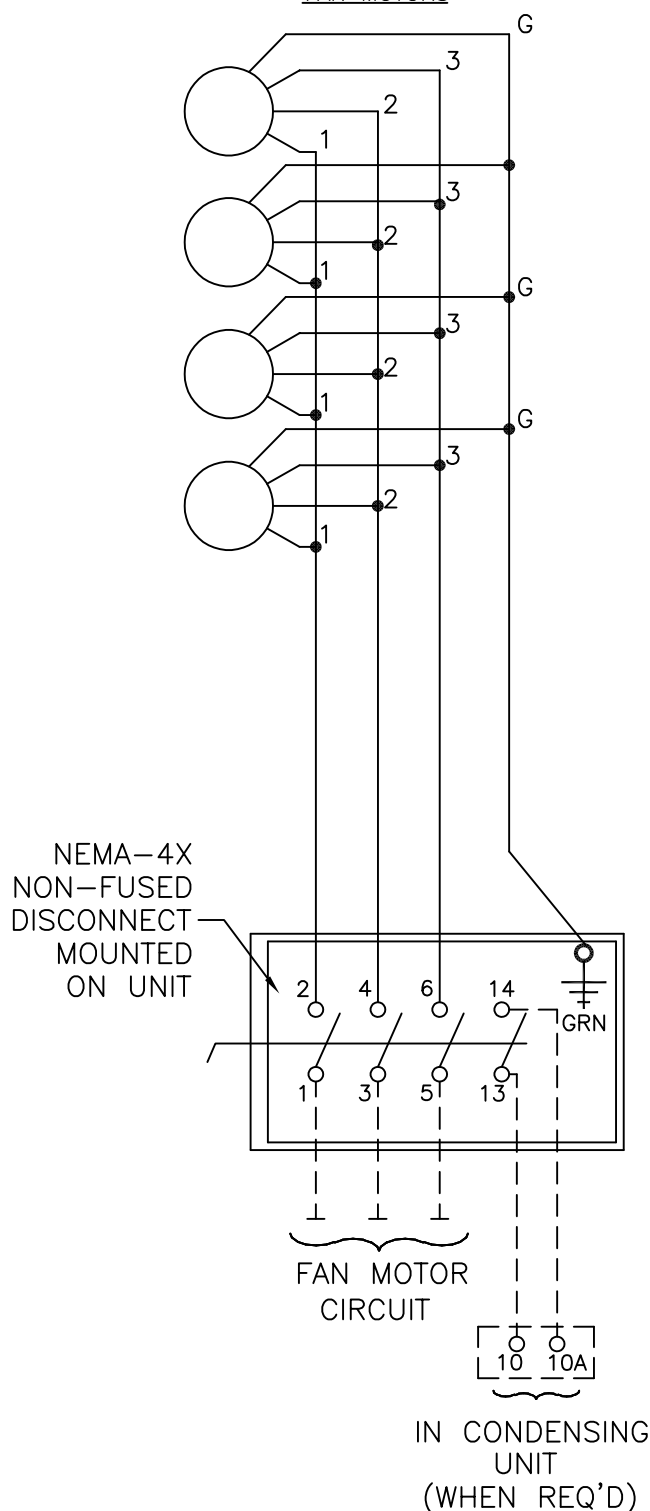


WORK TO DIMENSIONS
DO NOT SCALE DRAWING

SALES ORDER: 10203188	LINE: 10	C	REVISED UNIT & TAG	3/5 2021	JTL
CUSTOMER P.O.: CR2101G 27257		B	REVISED # OF DISCON.	2/15 2021	TPJ
CUSTOMER NAME: REPUBLIC REFRIGERATION		A	REVISED TAG UNIT	2/9 2021	TPJ
JOB NAME: WAYNE FARMS		NO.	CHANGE DESCRIPTION	DATE	CK'D
TAG UNIT: DOCK AU-2A		REVISIONS			
MODEL: DT4B-1027-RBA-IHGC-HGR-RH					
ITEM NO.: 50202312					
NO. REQ'D: 1	DATE: 2/5/2021				
SHEET 2 OF 2					
TOLERANCE: ±0.50"					



SGS

REV.

C

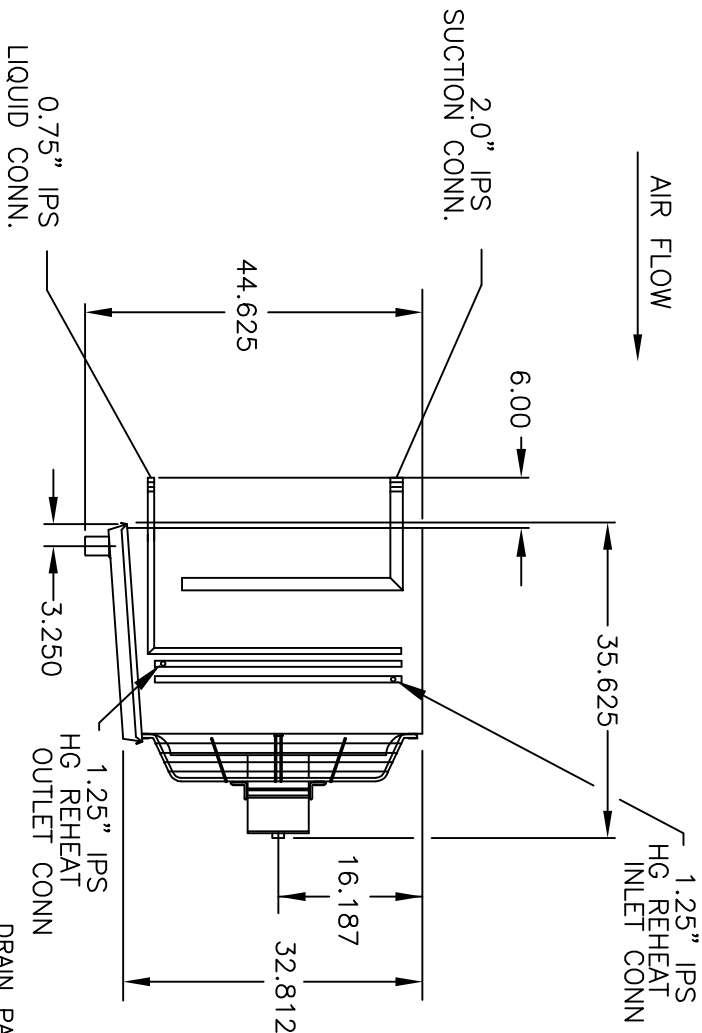

WATTS: 930
VOLTS: 115
AMPS: 60
MAX FUSE: 15
LINEAR FT/HEAT TAPE: 46.5

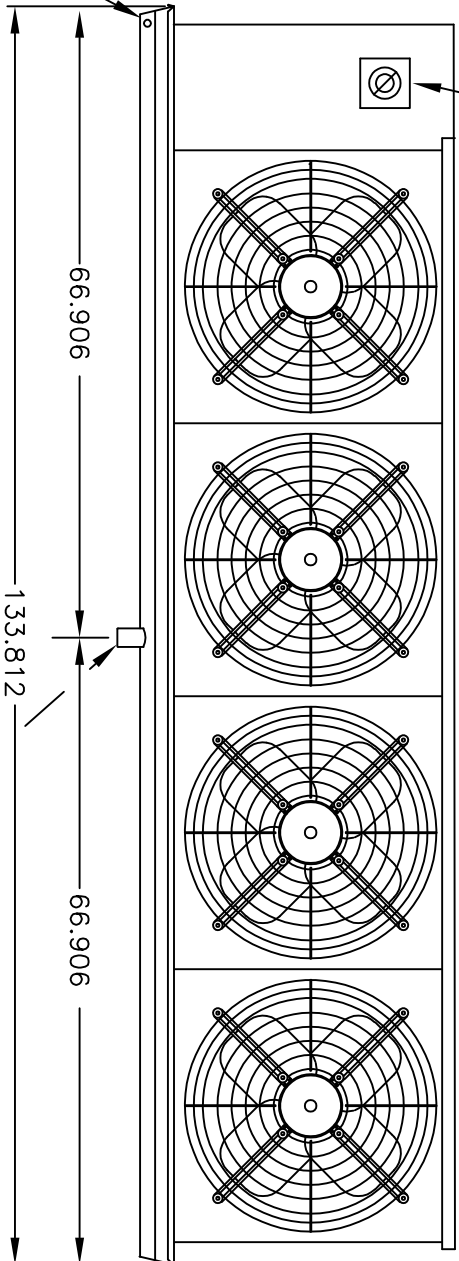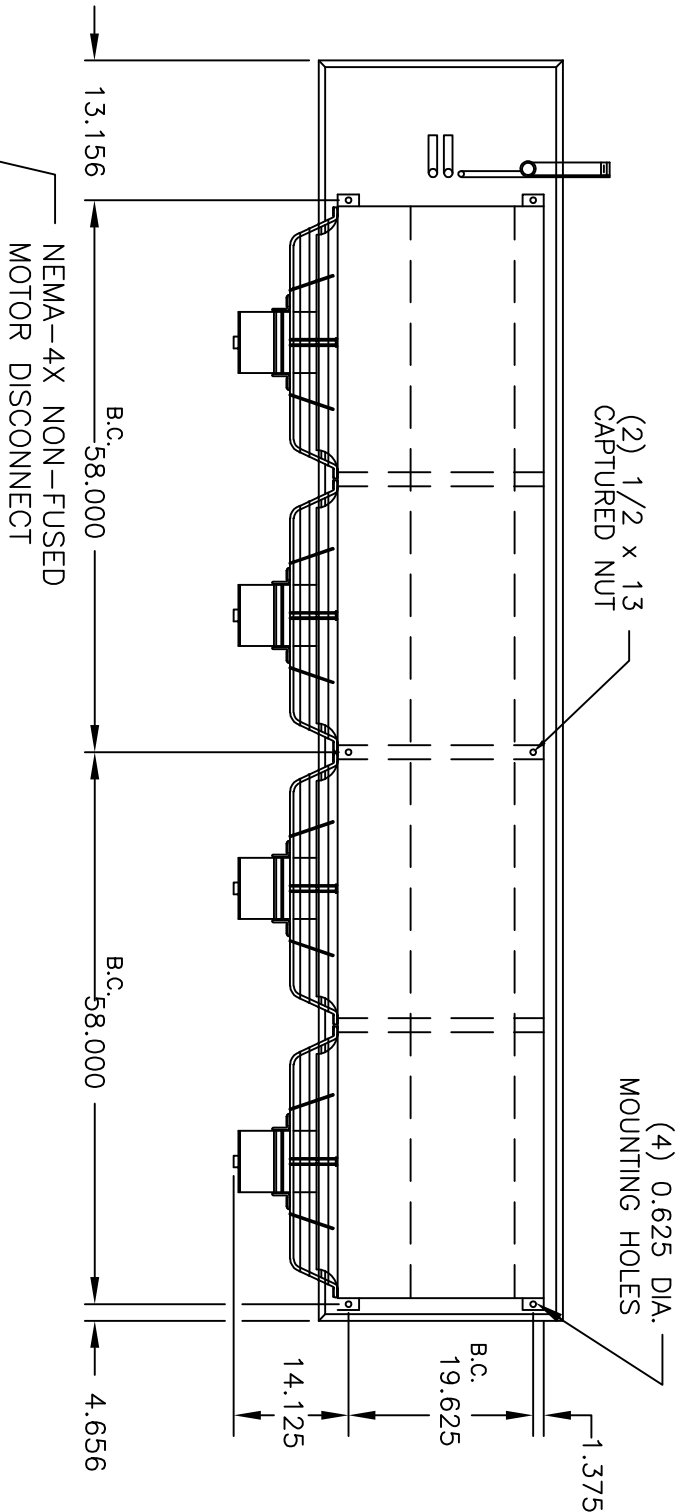

UNIT CONSTRUCTION

HOUSING:

MILL GALVANIZED STEEL

DRAIN PAN:

AIR DEFROST

STAINLESS STEEL INSULATED W/STAINLESS STEEL COVER

COIL:

RECIRCULATED BOTTOM FEED

HOT GAS DEFROST

STAINLESS STEEL TUBING

ALUMINUM FINS

MOTORS:

1/3HP 460/3/60

1140 RPM

DESIGN SPECIFICATIONS		UNITS
UNIT COOLING CAPACITY	128380	BTUH
ROOM TEMPERATURE	40	°F
SUCTION TEMPERATURE	26	°F
REFRIGERANT	R717	—
*LIQUID FEED RATE	1.6	GPM
AIR FLOW RATE	13880	CFM
EXTERNAL STATIC PRESSURE	0	INWG
NOMINAL FIN SPACING	3	FINS/IN
TOTAL SURFACE AREA	2004	SQ. FT
APPROXIMATE WEIGHT	1160	LBS
COIL INTERNAL VOLUME	3.1	CU. FT

* NOTE: LIQUID FEED PRESSURE MUST BE AT LEAST 5 PSIG ABOVE SUCTION PRESSURE.

WORK TO DIMENSIONS
DO NOT SCALE DRAWING

C	REVISED UNIT & TAG	3/5 2021	JTL
B	REVISED # OF DISCON.	2/10 2021	TPJ
A	REVISED TAG UNIT	2/9 2021	TPJ

SALES ORDER:	10203188	LINE: 20	NO.	CHANGE DESCRIPTION	DATE	CHK
CUSTOMER P.O.:	CR2101G	27257	REVISIONS			
CUSTOMER NAME:	REPUBLIC REFRIGERATION					
JOB NAME:	WAYNE FARMS					
TAG UNIT:	DOCK AU-2B					
MODEL:	DT4B-1027-RBA-IHGC-HGR-LH					
ITEM NO.:	50202313					
NO. REQ'D:	1	DATE: 2/5/2021	DRAWN: TPJ			
SHEET 1 OF 2						REV.
TOLERANCE: ±0.50"						



UNIT ELECTRICAL NAMEPLATE DATA

MOTOR CIRCUIT

AMOUNT	VOLTS	HZ	PH	HP EACH	FLA EACH
4	460	60	3	1/3	0.85

MINIMUM CIRCUIT AMPACITY **3.63**


MAXIMUM OVERCURRENT PROTECTION **15**

NOTES:

- MOTORS IN COLD ROOMS MAY DRAW GREATER THAN NAMEPLATE AMPERAGE DUE TO HIGHER DENSITY OF COLD AIR.
- MOTORS HAVE AUTOMATIC RESET THERMAL OVERLOAD PROTECTION.
- └─── FIELD WIRING

—— FACTORY WIRING
- REFERENCE TERMINAL BLOCK MOUNTING ASSEMBLY KIT E322580A.

FAN MOTORS

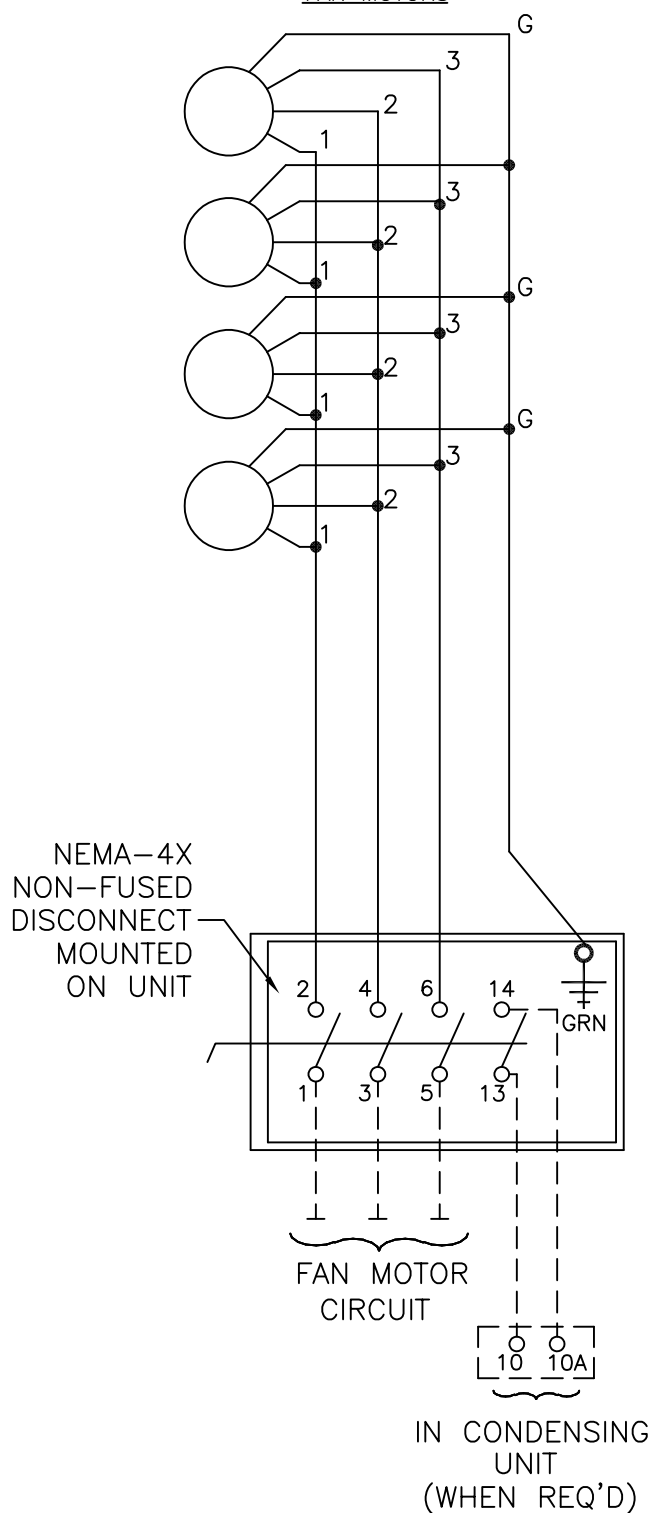

WORK TO DIMENSIONS
DO NOT SCALE DRAWING

SALES ORDER:	10203188	LINE: 20	C	REVISED UNIT & TAG	3/5 2021	JTL
CUSTOMER P.O.:	CR2101G	27257	B	REVISED # OF DISCON.	2/10 2021	TPJ
CUSTOMER NAME:	REPUBLIC REFRIGERATION		A	REVISED TAG UNIT	2/9 2021	TPJ
JOB NAME:	WAYNE FARMS		NO.	CHANGE DESCRIPTION	DATE	CK'D
TAG UNIT:	DOCK AU-2B		REVISIONS			
MODEL:	DT4B-1027-RBA-IHGC-HGR-LH					
ITEM NO.:	50202313					
NO. REQ'D:	1	DATE:	2/5/2021	DRAWN:	TPJ	
SHEET	2 OF 2					REV.
TOLERANCE:	±0.50"					C

SGS

UNIT ELECTRICAL NAMEPLATE DATA

MOTOR CIRCUIT

AMOUNT	VOLTS	HZ	PH	HP EACH	FLA EACH
5	460	60	3	1/2	1.00

MINIMUM CIRCUIT AMPACITY 5.25


MAXIMUM OVERCURRENT PROTECTION 15

NOTES:

- MOTORS IN COLD ROOMS MAY DRAW GREATER THAN NAMEPLATE AMPERAGE DUE TO HIGHER DENSITY OF COLD AIR.
- MOTORS HAVE AUTOMATIC RESET THERMAL OVERLOAD PROTECTION.
- FIELD WIRING

FACTORY WIRING
- REFERENCE TERMINAL BLOCK MOUNTING ASSEMBLY KIT E322580A.



FAN MOTORS

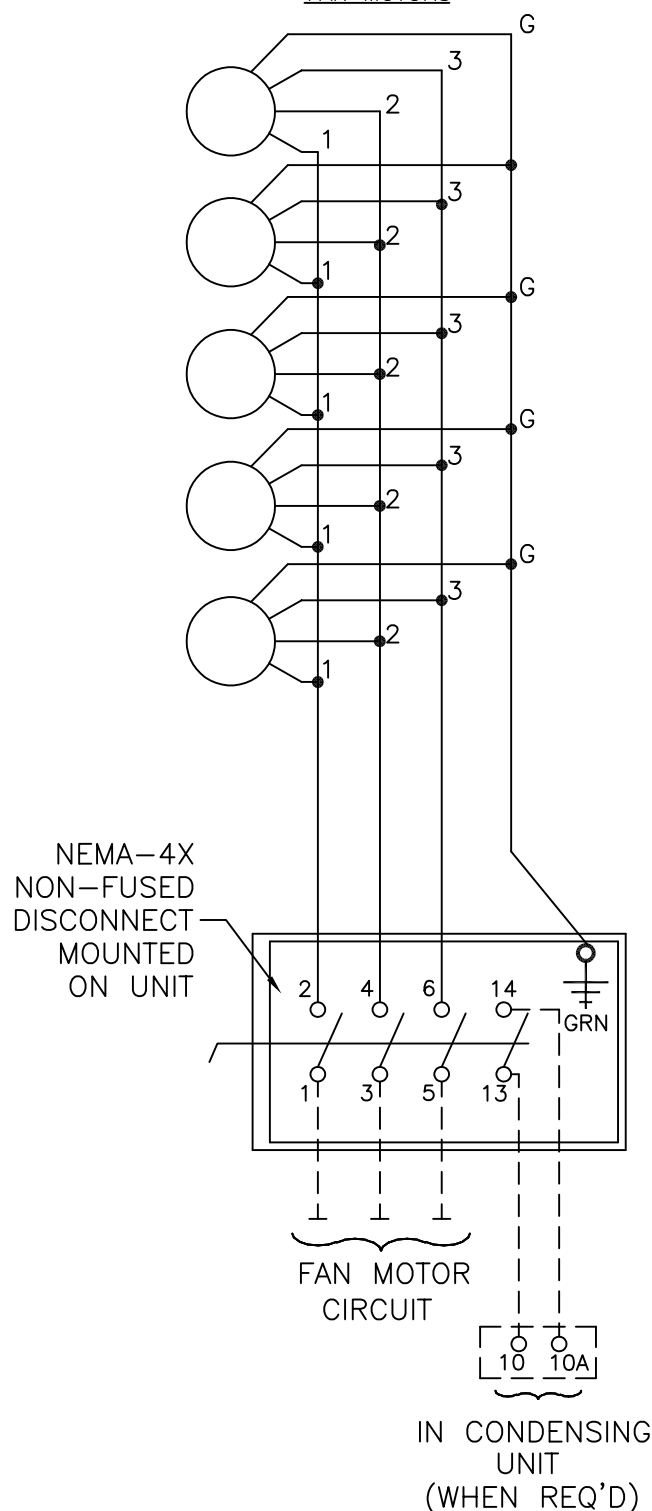

WORK TO DIMENSIONS
DO NOT SCALE DRAWING


SALES ORDER:	10203188	LINE:	50	C	REVISED UNIT TAG	3/5 2021	JTL
CUSTOMER P.O.:	CR2101G 27257			B	REVISED # OF DISCON.	2/15 2021	TPJ
CUSTOMER NAME:	REPUBLIC REFRIGERATION			A	REVISED TAG UNIT	2/9 2021	TPJ
JOB NAME:	WAYNE FARMS	NO.	CHANGE DESCRIPTION	DATE	CK'D		
TAG UNIT:	COOLER AU-3A	REVISIONS					
MODEL:	DTX5B-1887-RBA-IHGC-HGR-RH						
ITEM NO.:	50202353						
NO. REQ'D:	1	DATE:	2/5/2021	DRAWN:	TPJ		
SHEET	2 OF 2						REV.
TOLERANCE:	±0.50"						C

SGS

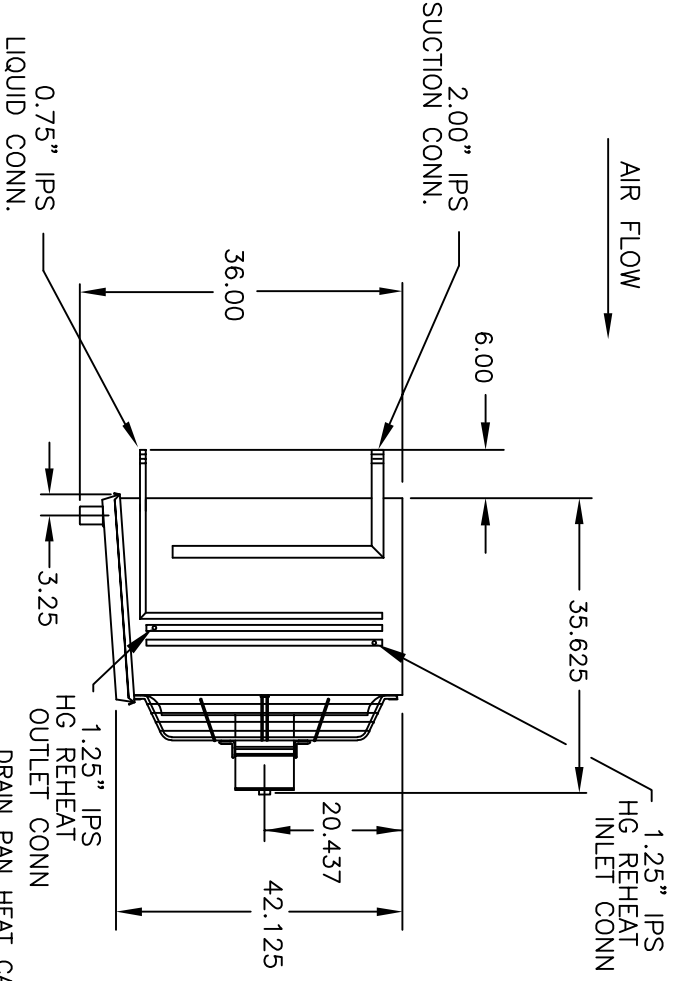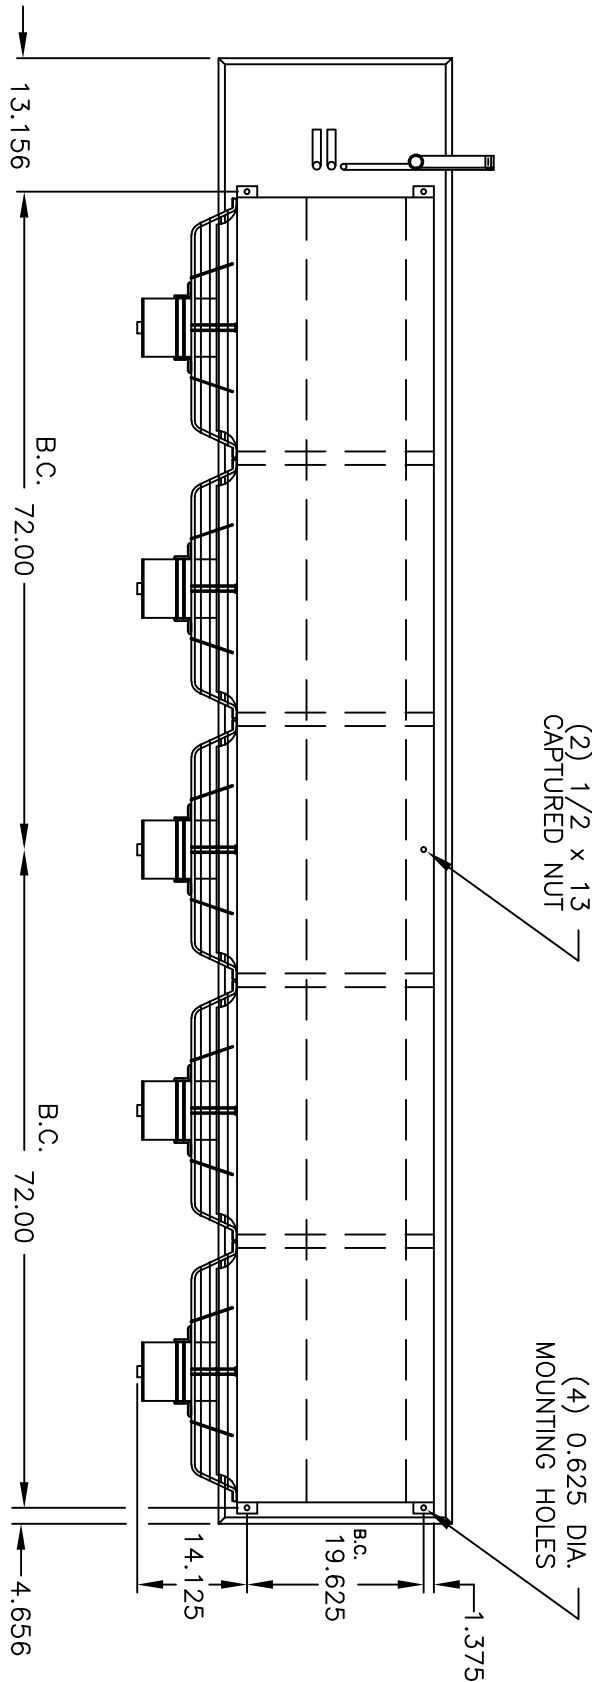

WATTS: 1120
VOLTS: 115
AMPS: 60
MAX FUSE: 15
LINEAR FT/HEAT TAPE: 56

1.250 F.P.T. DRAIN CONNECTION
MUST BE TRAPPED BY CUSTOMER

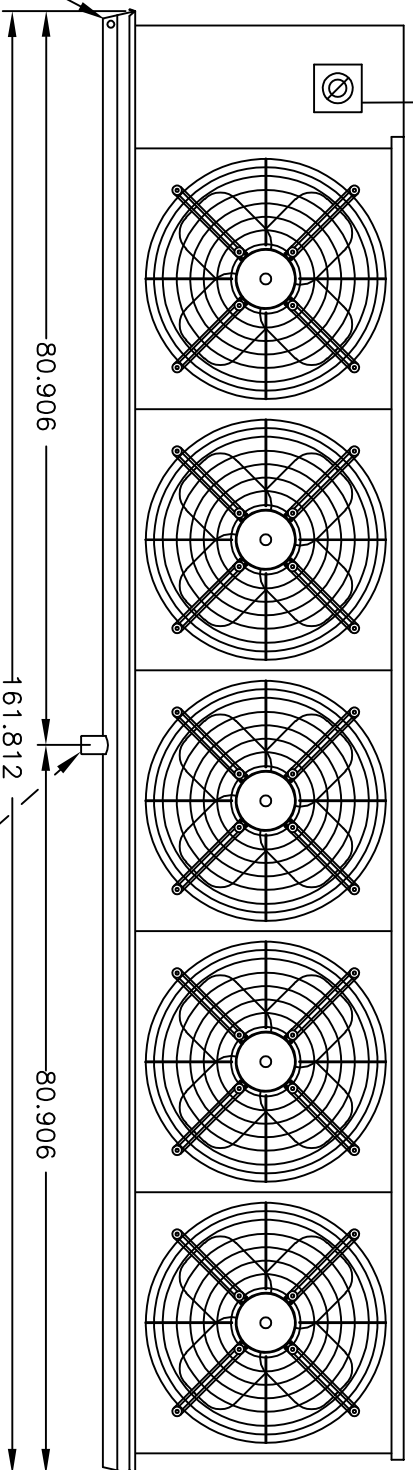

UNIT CONSTRUCTION

- HOUSING: MILL GALVANIZED STEEL
- DRAIN PAN: AIR DEFROST
- COIL: STAINLESS STEEL INSULATED W/STAINLESS STEEL COVER
- RECIRCULATED BOTTOM FEED
- HOT GAS DEFROST
- STAINLESS STEEL TUBING
- ALUMINUM FINS
- MOTORS: 1/2HP 460/3/60 1140 RPM

DESIGN SPECIFICATIONS		UNITS
UNIT COOLING CAPACITY	158400	BTUH
ROOM TEMPERATURE	35	°F
SUCTION TEMPERATURE	25	°F
REFRIGERANT	R717	—
*LIQUID FEED RATE	2.7	GPM
AIR FLOW RATE	21550	CFM
EXTERNAL STATIC PRESSURE	0	INWG
NOMINAL FIN SPACING	4	FINS/IN
TOTAL SURFACE AREA	4125	SQ FT
APPROXIMATE WEIGHT	1975	LBS
COIL INTERNAL VOLUME	4.8	CU FT
*NOTE: LIQUID FEED PRESSURE MUST BE AT LEAST 5 PSIG ABOVE SUCTION PRESSURE.		

WORK TO DIMENSIONS
DO NOT SCALE DRAWING

SALES ORDER: 10203188	LINE: 60-70	NO.	CHANGE DESCRIPTION	DATE	CHK'D
CUSTOMER P.O.: CR2101G	27257				
CUSTOMER NAME: REPUBLIC REFRIGERATION					
JOB NAME: WAYNE FARMS					
TAG UNIT: COOLER AU-4A, COOLER AU-4B					
MODEL: DTX5B-1887-RBA-IHGC-HGR-LH					
ITEM NO.: 50202355					
NO. REQ'D: 2	DATE: 2/5/2021		DRAWN: TPJ		
SHEET 1 OF 2					
TOLERANCE: ±0.50"					



UNIT ELECTRICAL NAMEPLATE DATA

MOTOR CIRCUIT



AMOUNT VOLTS HZ PH HP EACH FLA EACH

5 460 60 3 1/2 1.00

MINIMUM CIRCUIT AMPACITY 5.25


MAXIMUM OVERCURRENT PROTECTION 15

NOTES:

1. MOTORS IN COLD ROOMS MAY DRAW GREATER THAN NAMEPLATE AMPERAGE DUE TO HIGHER DENSITY OF COLD AIR.
2. MOTORS HAVE AUTOMATIC RESET THERMAL OVERLOAD PROTECTION.
3.  FIELD WIRING
 FACTORY WIRING
4. REFERENCE TERMINAL BLOCK MOUNTING ASSEMBLY KIT E322580A.

FAN MOTORS

NEMA-4X
NON-FUSED
DISCONNECT
MOUNTED
ON UNIT

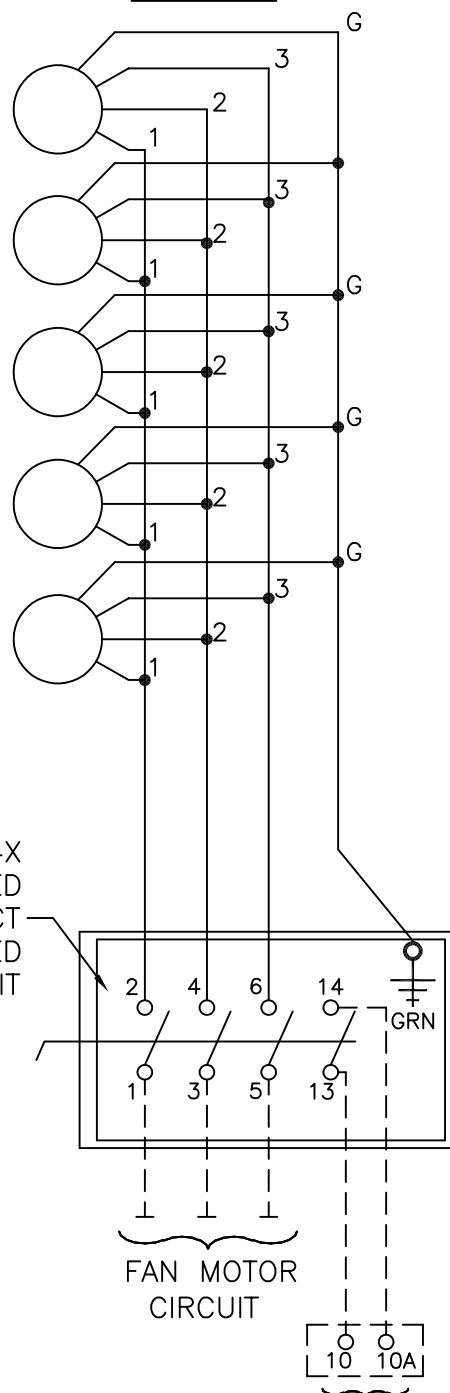


FAN MOTOR
CIRCUIT

IN CONDENSING
UNIT
(WHEN REQ'D)



WORK TO DIMENSIONS
DO NOT SCALE DRAWING

SALES ORDER: 10203188	LINE: 60-70	C	REVISED UNIT TAG	3/5 2021	JTL
CUSTOMER P.O.: CR2101G 27257		B	REVISED # OF DISCON.	2/15 2021	TPJ
CUSTOMER NAME: REPUBLIC REFRIGERATION		A	REVISED TAG UNIT	2/9 2021	TPJ
JOB NAME: WAYNE FARMS		NO.	CHANGE DESCRIPTION	DATE	CK'D
TAG UNIT: COOLER AU-4A, COOLER AU-4B		REVISIONS			
MODEL: DTX5B-1887-RBA-IHGC-HGR-LH					
ITEM NO.: 50202355					
NO. REQ'D: 2	DATE: 2/5/2021	DRAWN: TPJ			
SHEET 2 OF 2					REV. C
TOLERANCE: ±0.50"					

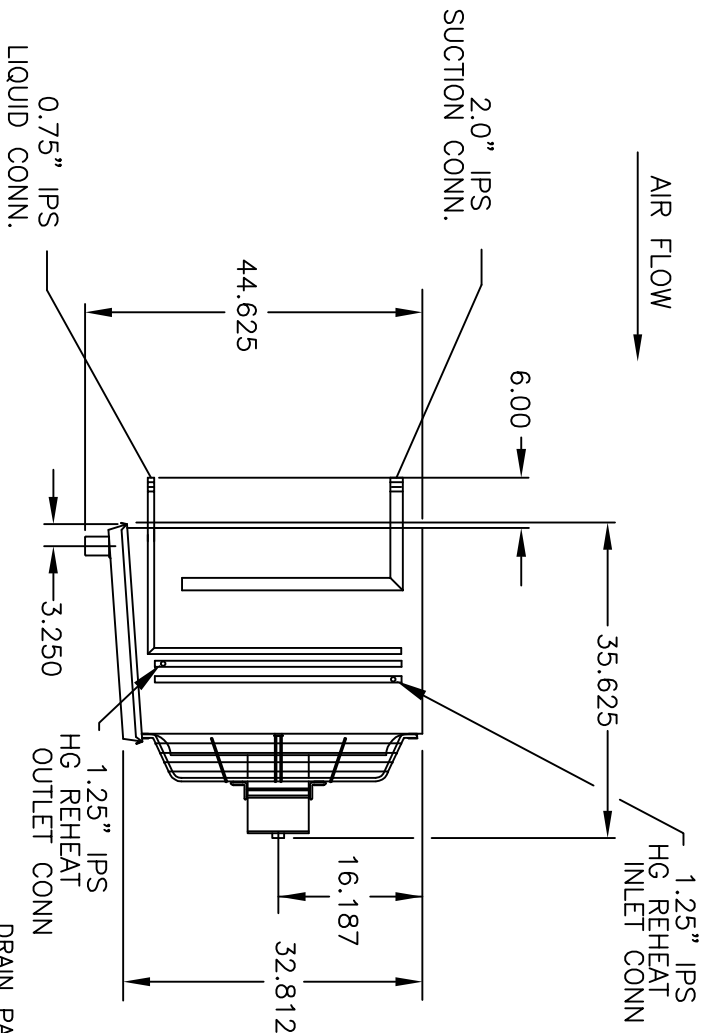

DRAIN PAN HEAT CABLE AT 0°F DESIGN

WATTS: 930
VOLTS: 115
AMPS: 60
MAX FUSE: 15
LINEAR FT/HEAT TAPE: 46.5

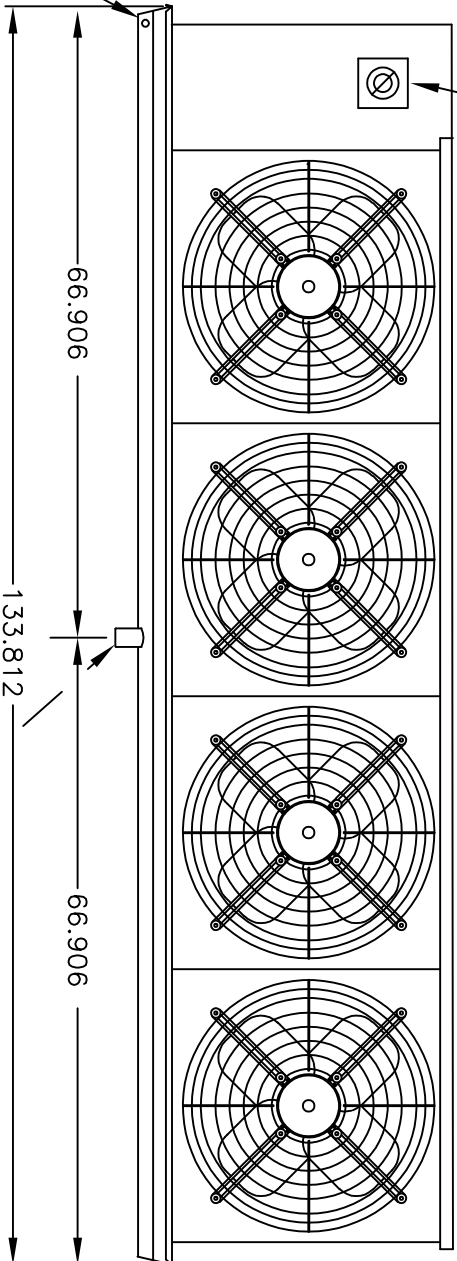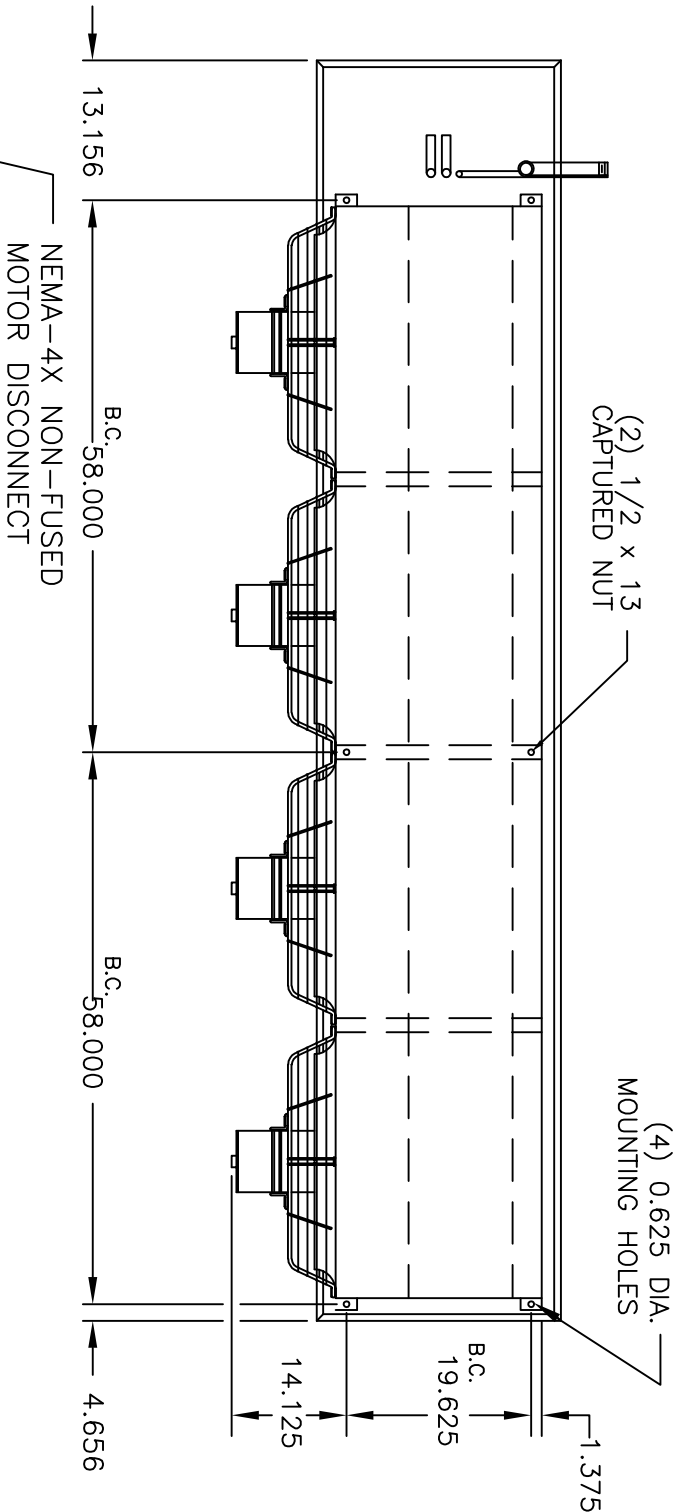

UNIT CONSTRUCTION

HOUSING:

MILL GALVANIZED STEEL

DRAIN PAN:

AIR DEFROST

STAINLESS STEEL INSULATED W/STAINLESS STEEL COVER

COIL:

RECIRCULATED BOTTOM FEED

HOT GAS DEFROST

STAINLESS STEEL TUBING

ALUMINUM FINS

MOTORS:

1/3HP 460/3/60

1140 RPM

DESIGN SPECIFICATIONS		UNITS
UNIT COOLING CAPACITY	91,700	BTUH
ROOM TEMPERATURE	45	°F
SUCTION TEMPERATURE	35	°F
REFRIGERANT	R717	—
*LIQUID FEED RATE	1.6	GPM
AIR FLOW RATE	13880	CFM
EXTERNAL STATIC PRESSURE	0	INWG
NOMINAL FIN SPACING	3	FINS/IN
TOTAL SURFACE AREA	2004	SQ. FT
APPROXIMATE WEIGHT	1160	LBS
COIL INTERNAL VOLUME	3.1	CU. FT
* NOTE: LIQUID FEED PRESSURE MUST BE AT LEAST 5 PSIG ABOVE SUCTION PRESSURE.		

WORK TO DIMENSIONS
DO NOT SCALE DRAWING

C	REVISED UNIT TAG	3/5 2021	JTL
B	REVISED # OF DISCON.	2/15 2021	TPJ
A	REVISED TAG UNIT	2/9 2021	TPJ

SALES ORDER:	10203188	LINE: 40	NO.	CHANGE DESCRIPTION	DATE	CHK'D
CUSTOMER P.O.:	CR2101G	27257	REVISIONS			
CUSTOMER NAME:	REPUBLIC REFRIGERATION					
JOB NAME:	WAYNE FARMS					
TAG UNIT:	HALLWAY AU-17A					
MODEL:	DT4B-1027-RBA-IHGC-HGR-LH					
ITEM NO.:	50202350					
NO. REQ'D:	1	DATE:	2/5/2021	DRAWN:	TPJ	
SHEET	1 OF 2					
TOLERANCE:	±0.50"					
						REV.



C

UNIT ELECTRICAL NAMEPLATE DATA

MOTOR CIRCUIT

AMOUNT	VOLTS	HZ	PH	HP EACH	FLA EACH
4	460	60	3	1/3	0.85

MINIMUM CIRCUIT AMPACITY **3.63**


MAXIMUM OVERCURRENT PROTECTION **15**

NOTES:

- MOTORS IN COLD ROOMS MAY DRAW GREATER THAN NAMEPLATE AMPERAGE DUE TO HIGHER DENSITY OF COLD AIR.
- MOTORS HAVE AUTOMATIC RESET THERMAL OVERLOAD PROTECTION.
- └─── FIELD WIRING

—— FACTORY WIRING
- REFERENCE TERMINAL BLOCK MOUNTING ASSEMBLY KIT E322580A.

FAN MOTORS

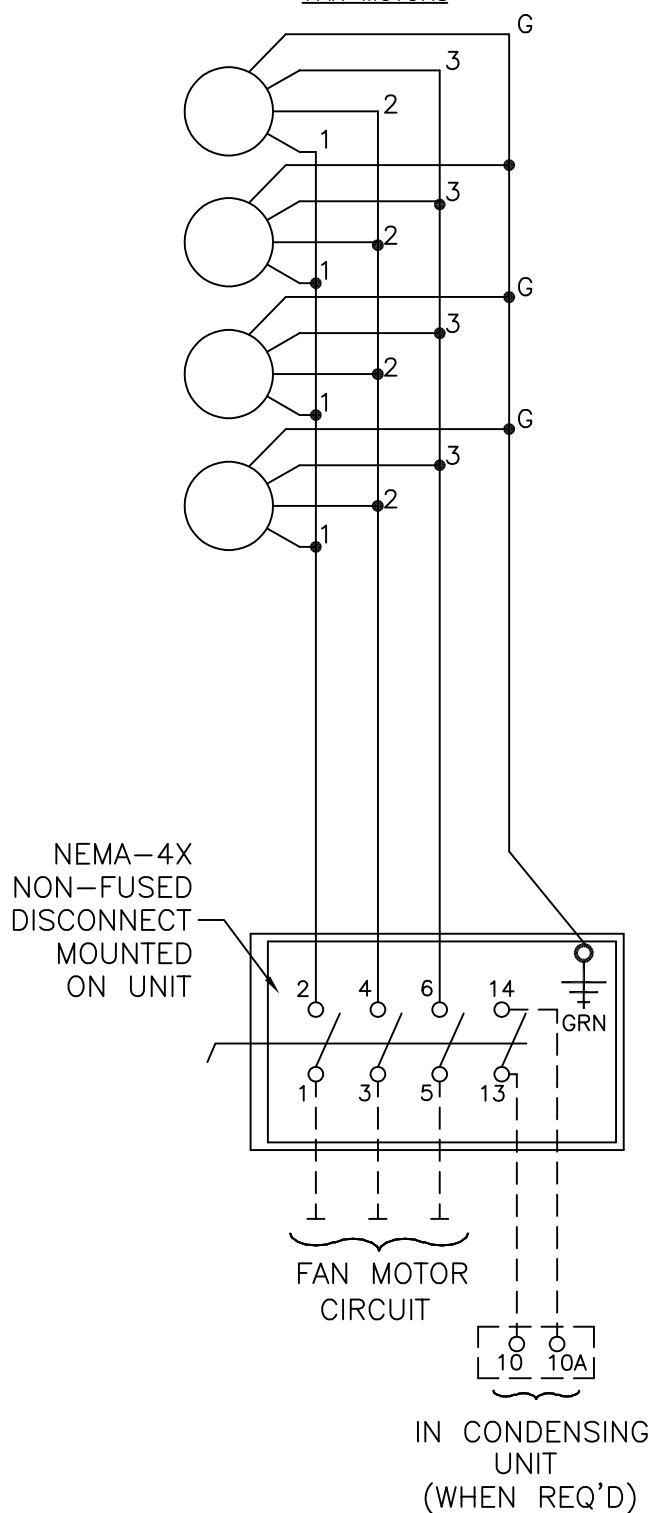


WORK TO DIMENSIONS
DO NOT SCALE DRAWING

SALES ORDER: 10203188	LINE: 40	C	REVISED UNIT TAG	3/5 2021	JTL
CUSTOMER P.O.: CR2101G 27257		B	REVISED # OF DISCON.	2/15 2021	TPJ
CUSTOMER NAME: REPUBLIC REFRIGERATION		A	REVISED TAG UNIT	2/9 2021	TPJ
JOB NAME: WAYNE FARMS		NO.	CHANGE DESCRIPTION	DATE	CK'D
TAG UNIT: HALLWAY AU-17A		REVISIONS			
MODEL: DT4B-1027-RBA-IHGC-HGR-LH					
ITEM NO.: 50202350					
NO. REQ'D: 1	DATE: 2/5/2021				
SHEET 2 OF 2					
TOLERANCE: ±0.50"					

SGS

REV.

C

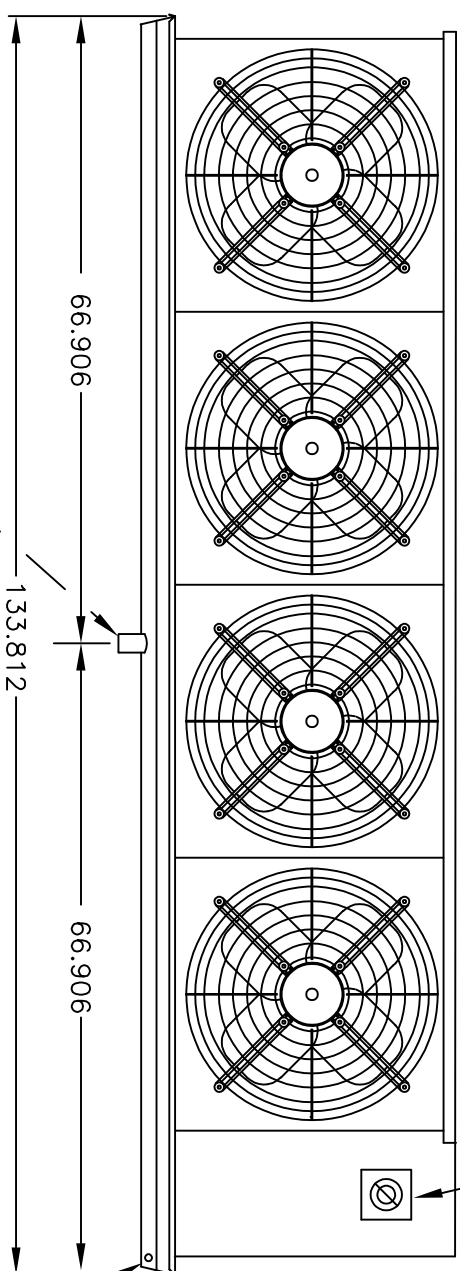

UNIT ELECTRICAL NAMEPLATE DATA

MOTOR CIRCUIT



AMOUNT VOLTS HZ PH HP EACH FLA EACH

4 460 60 3 1/3 0.85


MINIMUM CIRCUIT AMPACITY 3.63

MAXIMUM OVERCURRENT PROTECTION 15

NOTES:

1. MOTORS IN COLD ROOMS MAY DRAW GREATER THAN NAMEPLATE AMPERAGE DUE TO HIGHER DENSITY OF COLD AIR.
2. MOTORS HAVE AUTOMATIC RESET THERMAL OVERLOAD PROTECTION.
3.  FIELD WIRING
 FACTORY WIRING
4. REFERENCE TERMINAL BLOCK MOUNTING ASSEMBLY KIT E322580A.

FAN MOTORS

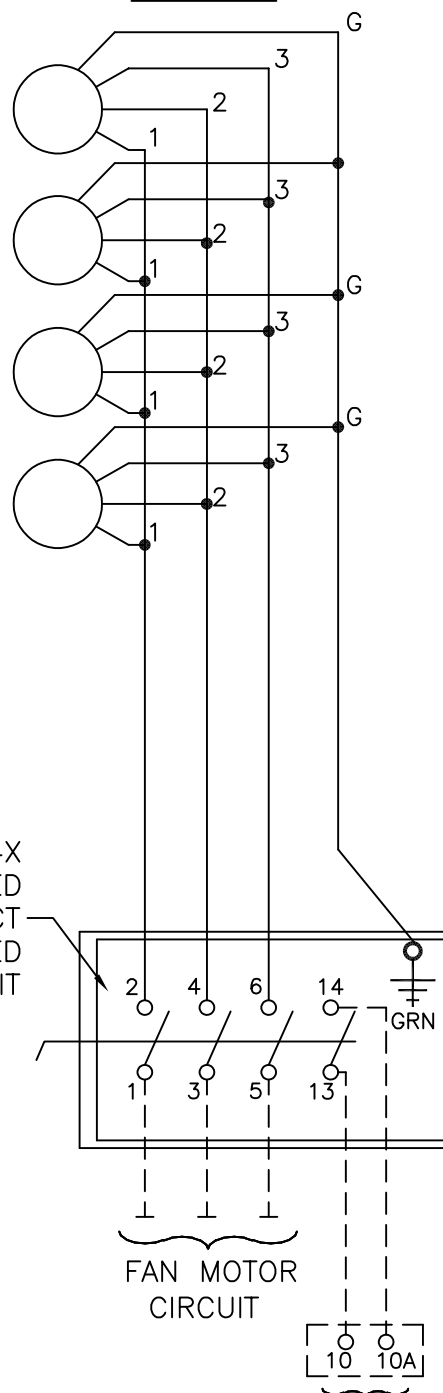

NEMA-4X
NON-FUSED
DISCONNECT
MOUNTED
ON UNIT

FAN MOTOR
CIRCUIT

IN CONDENSING
UNIT
(WHEN REQ'D)

WORK TO DIMENSIONS
DO NOT SCALE DRAWING

SALES ORDER:	10203188	LINE:	30	NO.	CHANGE DESCRIPTION	DATE	CK'D
CUSTOMER P.O.:	CR2101G 27257	REVISIONS					
CUSTOMER NAME:	REPUBLIC REFRIGERATION						
JOB NAME:	WAYNE FARMS						
TAG UNIT:	HALLWAY AU-17B						
MODEL:	DT4B-1027-RBA-IHGC-HGR-RH						
ITEM NO.:	50202349						
NO. REQ'D:	1	DATE:	2/5/2021	DRAWN:		TPJ	
SHEET	2 OF 2						REV.
TOLERANCE:	±0.50"						C

SGS