


evapco

RVS

Refrigeration Pressure Vessels



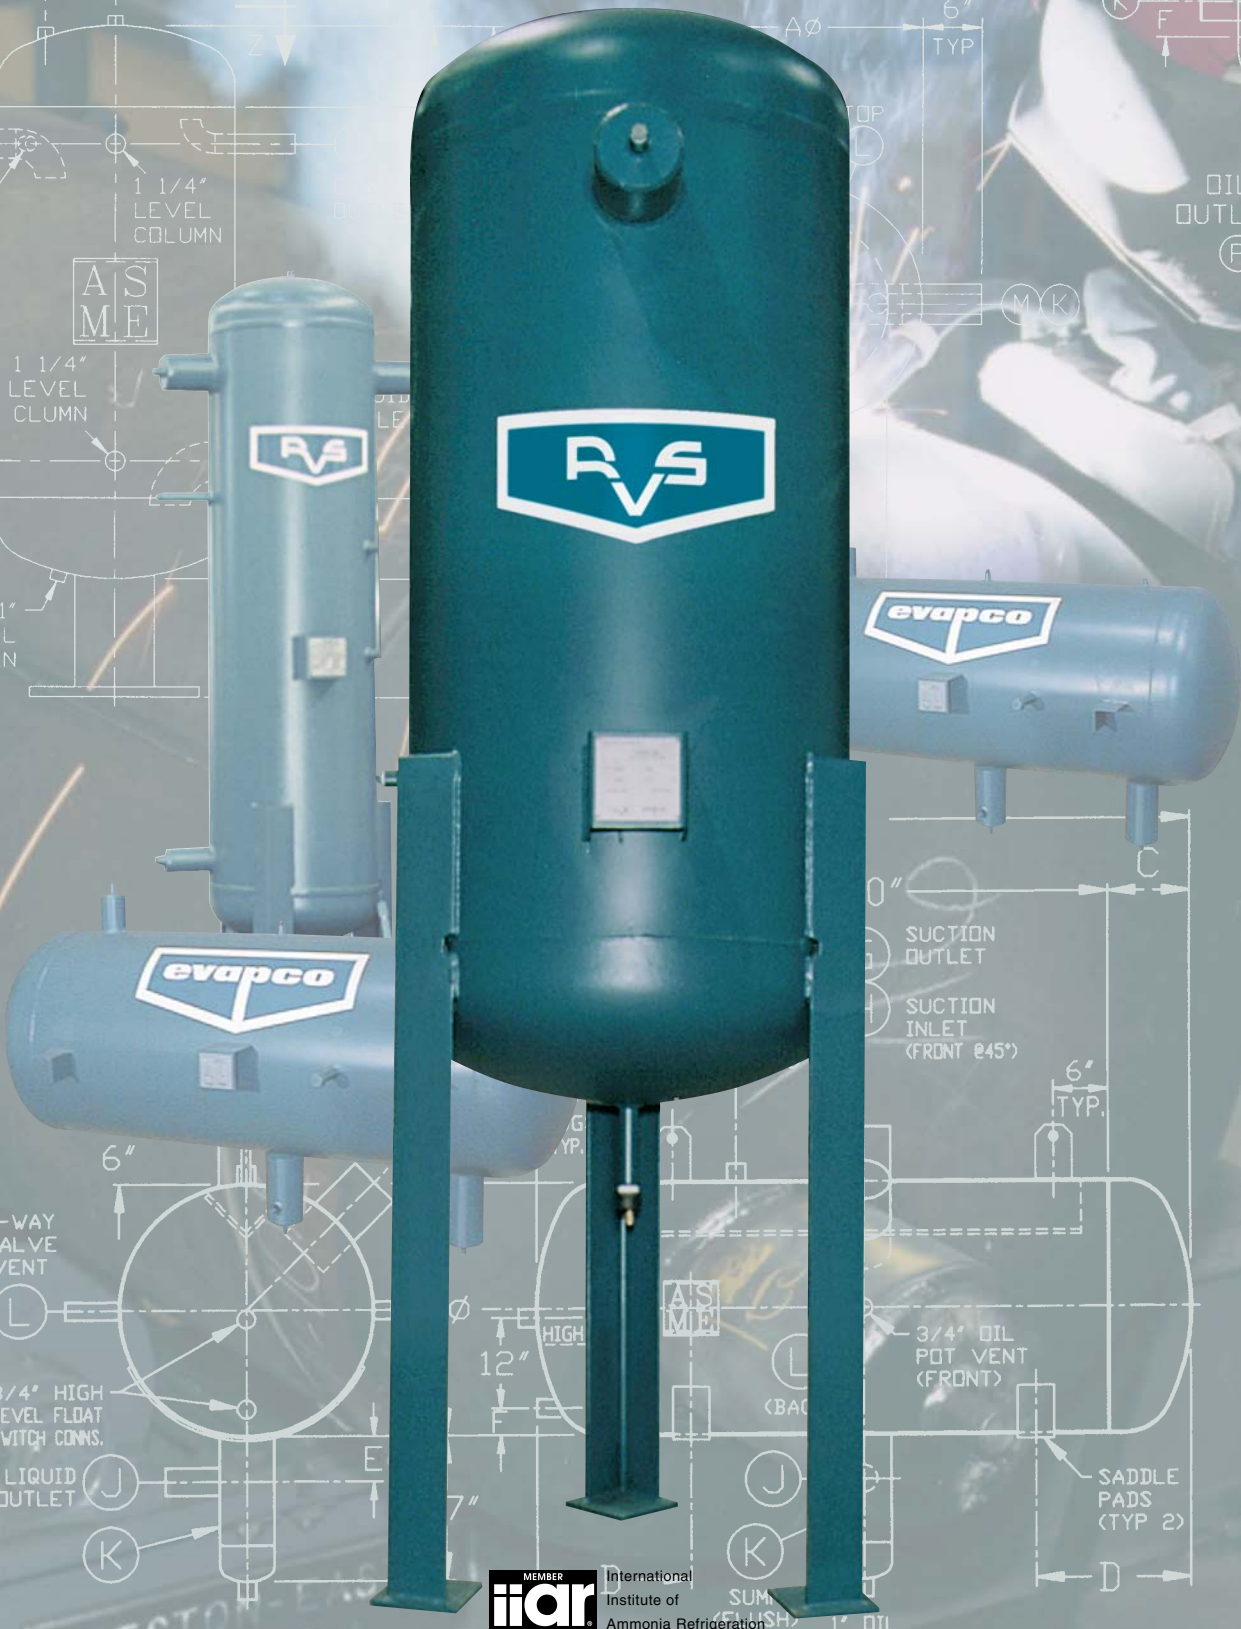

Since its founding in 1983, Refrigeration Valves and Systems Corporation (RVS) has become the customer preferred supplier of innovative industrial refrigeration products including factory assembled, packaged recirculation systems, and ASME pressure vessels of all types and sizes.

RVS was acquired by EVAPCO, Inc. in 1994. EVAPCO is recognized as the leading supplier of quality heat transfer equipment to the Industrial Refrigeration, HVAC, and Process Cooling Industries. The success of EVAPCO/RVS has been the result of a continual commitment to product improvement, quality workmanship, and a dedication to providing unparalleled customer service and satisfaction.



Pressure vessels and recirculator packages are manufactured to ASME requirements in two modern facilities located in Bryan, Texas and Taneytown, Maryland. With 90,000 square feet of manufacturing area, EVAPCO/RVS has the capacity to handle all of your vessel and recirculator package requirements.

From the smallest pressure vessel to the largest packages, EVAPCO/RVS is committed to providing superior technical support and the highest quality products with fast, on-time shipments to meet your construction schedule.

© EVAPCO, INC. 1999



*Custom Designed &
Manufactured*

Superior Quality

Proven Performance

*Fast, On-Time
Shipments*



Refrigeration Pressure Vessels

In most industrial refrigeration systems, individual pressure vessels often require custom design features. At EVAPCO/RVS, we design and manufacture pressure vessels to meet your specific requirements. EVAPCO/RVS products are assembled by a dedicated and highly experienced workforce utilizing the latest and most highly technical equipment available. A knowledgeable marketing team with refrigeration systems experience is dedicated to providing rapid price quotations, quick drawing submittals, and accurate technical support. The end result is **FAST, ON-TIME** shipments.

All vessel design and construction is in accordance with the latest version of the ASME Boiler and Pressure Vessel Code, Section VIII, Division 1. Vessel nozzles are in accordance with ASME B31.5.

We are ready to serve your pressure vessel requirements with the following specific advantages:

EVAPCO/RVS has the largest production capacity in the industry with two conveniently located facilities in Texas and Maryland. A unique opportunity exists to save on freight charges out of the Maryland facility by combining shipments with EVAPCO Condenser and Evaporator products.

In addition, we have the experience to manufacture your large pressure vessels! EVAPCO/RVS regularly produces vessels as large as 144" diameter by 30 feet long with 300 psig design working pressure. EVAPCO/RVS also offers vessels completely factory trimmed with liquid level columns and all specified valves.



The latest in high-technology equipment including:

A state-of-the-art shot-blast booth with automated particulate recovery system is used to ensure the highest quality surface finish for paint adhesion.

EVAPCO/RVS utilizes numerically controlled plasma plate burning tables for maximum production efficiency and product quality. Using data from CAD generated files, vessel nozzles are burned into the flat plate prior to rolling, saving time in production and expediting vessel shipments.



The large rolling capacity of EVAPCO/RVS' plate bending rolls assures that pressure vessel shells required for your most complex systems are fabricated in our quality-controlled facilities.

High-speed submerged arc welders with 1000 amp power supplies and weld head controllers are used for fill passes on vessel seams and heads to ensure consistent, high-quality welds.


Hydrotesting is performed using water or refrigeration oil at 1.3 times the design working pressure of the vessel. Vessels are completely drained and dried prior to shipment. An optional nitrogen charge with pressure gauge is available.



EVAPCO/RVS personnel are dedicated to quick shipments to ensure that your pressure vessels are delivered to the job-site on-time, completely finished, and ready for rigging.




RVS STD. ASME 250# HORIZONTAL HIGH PRESSURE RECEIVERS

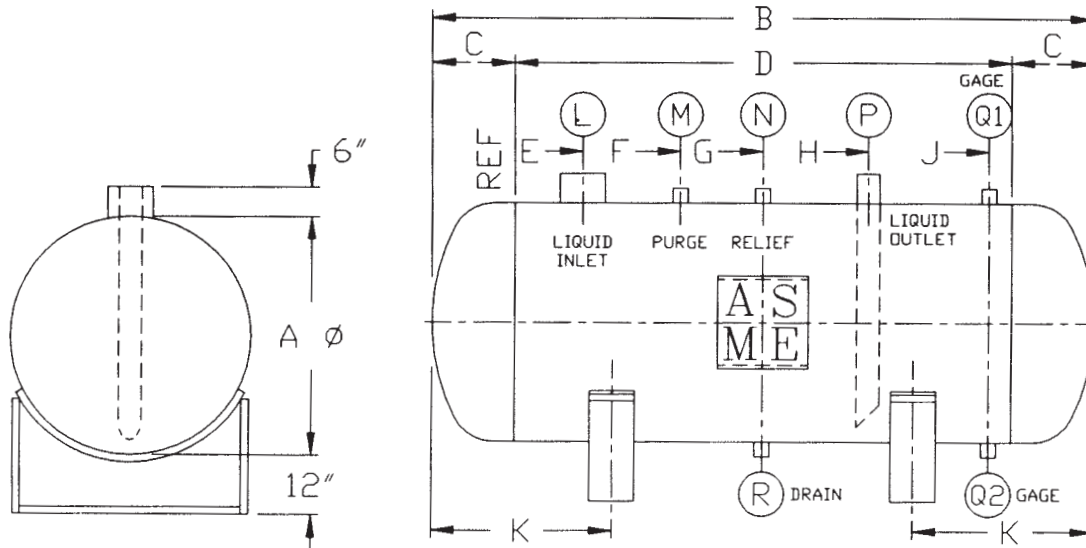

Model No.	Size	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	Weight lbs.	Internal Volume cu. ft.	Pump Down Capacity lbs. R717
HHPR2008	20" X 8'-0"	20	96	7-1/2	81	12	24	40-1/2	57	75	19	1-1/4	3/4	1/2	1	1-1/4	3/4	830	15.7	468
HHPR2012	20" X 12'-0"	20	144	7-1/2	129	12	24	64-1/2	105	123	29	1-1/2	3/4	1/2	1	1-1/4	3/4	1160	23.7	706
HHPR2412	24" X 12'-0"	24	144	8-1/4	127-1/2	12	24	63-3/4	103-1/2	121-1/2	29	2	3/4	1/2	1-1/4	1-1/4	3/4	1400	34.2	1020
HHPR2416	24" X 16'-0"	24	192	8-1/4	175-1/2	12	24	87-3/4	151-1/2	169-1/2	38	2	3/4	1/2	1-1/4	1-1/4	3/4	1800	46.2	1380
HHPR3012	30" X 11'-7"	30	139	9-1/2	120	12	24	60	96	114	29	2	3/4	1/2	1-1/4	1-1/4	3/4	1740	54.7	1630
HHPR3610	36" X 10'-0"	36	120	11	98	12	24	49	74	92	24	2-1/2	3/4	1/2	1-1/4	1-1/4	3/4	1880	64.5	1920
HHPR3612	36" X 11'-10"	36	142	11	120	12	24	60	98	116	29	2-1/2	3/4	1/2	1-1/2	1-1/4	3/4	2150	76.8	2320
HHPR4210	42" X 10'-0"	42	120	12-1/2	95	12	24	47-1/2	71	89	24	3	1	3/4	1-1/2	1-1/4	3/4	2900	87.8	2620
HHPR4212	42" X 12'-1"	42	145	12-1/2	120	12	24	60	95	113	29	3	1	3/4	2	1-1/4	3/4	3380	106	3160
HHPR4812	48" X 12'-4"	48	148	14	120	12	24	60	96	114	29	4	1	3/4	2	1-1/4	3/4	3990	141	4110
HHPR4816	48" X 16'-0"	48	192	14	164	12	24	82	140	158	38	4	1-1/4	3/4	2	1-1/4	3/4	4970	185	5510
HHPR4822	48" X 22'-4"	48	268	14	240	12	24	114	216	234	54	5	1-1/4	3/4	2-1/2	1-1/4	3/4	6670	262	7810
HHPR5412	54" X 12'-7"	54	151	15-1/2	120	12	24	60	96	114	30	4	1-1/4	3/4	2-1/2	1-1/4	3/4	4740	185	5510
HHPR5418	54" X 18'-0"	54	216	15-1/2	185	12	24	92-1/2	161	179	43	5	1-1/4	3/4	2-1/2	1-1/4	3/4	6380	272	8110
HHPR5422	54" X 22'-7"	54	271	15-1/2	240	12	24	114	216	234	54	5	1-1/2	1	2-1/2	1-1/4	3/4	7760	343	10200
HHPR6013	60" X 12'-10"	60	154	17	120	12	24	60	98	114	31	5	1-1/2	1	2-1/2	1-1/4	3/4	6650	231	6970
HHPR6020	60" X 20'-0"	60	240	17	206	12	24	103	182	200	48	6	1-1/2	1	3	1-1/4	3/4	9660	370	11000
HHPR6023	60" X 22'-10"	60	274	17	240	12	24	114	218	234	55	6	1-1/2	1	3	1-1/4	3/4	10850	425	12700
HHPR7213	72" X 13'-4"	72	160	20	120	12	24	60	96	114	32	5	2	1	3	1-1/4	3/4	8700	346	10300
HHPR7218	72" X 18'-0"	72	216	20	176	12	24	88	152	170	43	6	2	1	3	1-1/4	3/4	11060	476	14200
HHPR7223	72" X 23'-4"	72	280	20	240	12	24	114	216	234	56	8	2	1	3	1-1/4	3/4	13750	625	18100
HHPR8414	84" X 13'-10"	84	166	23	120	12	24	60	96	114	34	6	2	1	3	1-1/4	3/4	12560	480	14400
HHPR8420	84" X 20'-0"	84	240	23	194	12	24	97	170	188	48	8	2-1/2	1	4	1-1/4	3/4	16910	714	21300
HHPR8424	84" X 23'-10"	84	286	23	240	12	24	114	218	236	58	8	2-1/2	1	4	1-1/4	3/4	19610	860	25600
HHPR9614	96" X 14'-4"	96	172	26	120	12	24	60	96	117	36	8	2-1/2	1	4	1-1/4	3/4	15070	649	19300
HHPR9620	96" X 20'-0"	96	240	26	188	12	24	94	164	182	48	10	2-1/2	1	4	1-1/4	3/4	19650	933	27800
HHPR9624	96" X 24'-4"	96	292	26	240	12	24	114	216	234	58	10	2-1/2	1-1/4	4	1-1/4	3/4	23150	1050	31300

CAPACITY BASED ON 80% OF VOLUME AND 86°F AMMONIA


RVS STD. ASME 250# VERTICAL HIGH PRESSURE RECEIVERS

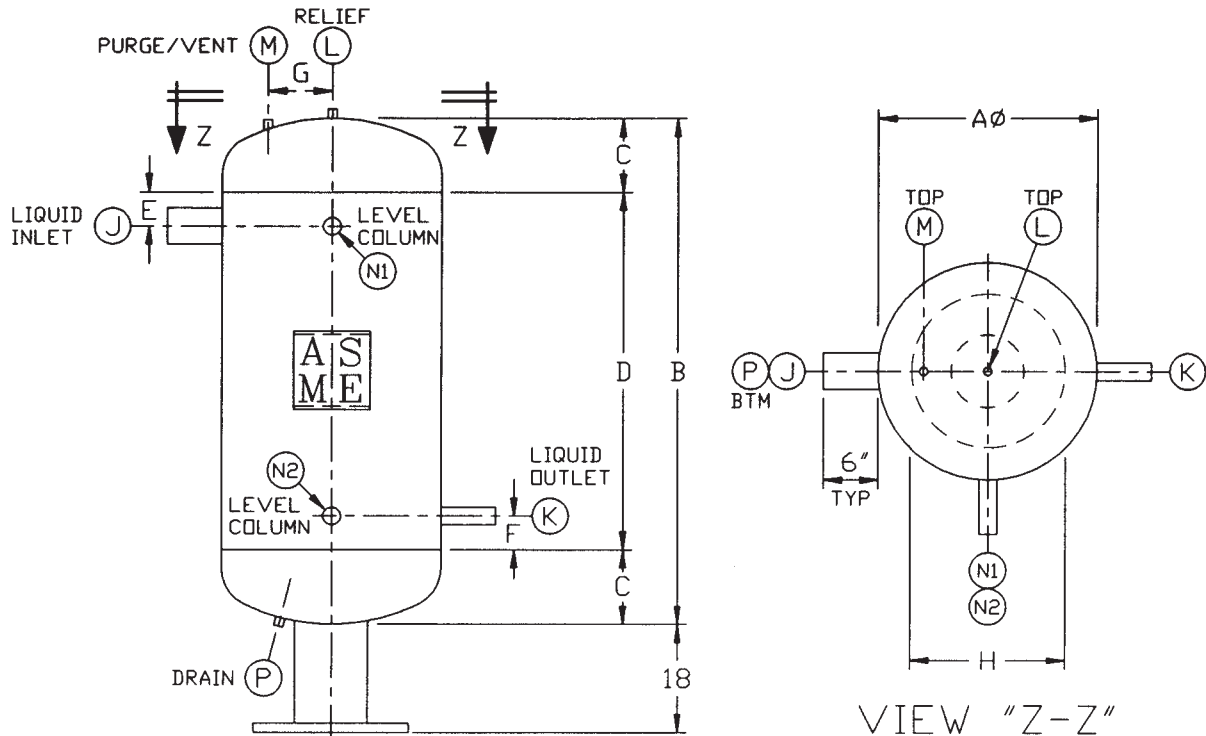

Model No.	Size	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Weight lbs.	Internal Volume cu. ft.	Pump Down Capacity lbs. R717
VHPR2012	20" X 12'-0"	20	144	7-1/2	129	3	3	5	14	1-1/2	1	1/2	3/4	1-1/4	3/4	1130	23.7	706
VHPR2412	24" X 12'-0"	24	144	8-1/4	127-1/2	3	3	6	17	2	1-1/4	1/2	3/4	1-1/4	3/4	1375	34.2	1020
VHPR2416	24" X 16'-0"	24	192	8-1/4	175-1/2	3	3	6	17	2	1-1/4	1/2	3/4	1-1/4	3/4	1780	46.2	1380
VHPR3012	30" X 11'-7"	30	142	9-1/2	120	3	3	7-1/2	21	2	1-1/4	1/2	3/4	1-1/4	3/4	1760	54.7	1630
VHPR3612	36" X 11'-10"	36	142	11	122	4	3	9	26	2-1/2	1-1/2	1/2	3/4	1-1/4	3/4	2150	76.8	2320
VHPR4212	42" X 12'-0"	42	144	12-1/2	119	4	3	9	30	3	2	3/4	1	1-1/4	3/4	3300	106	3160
VHPR4812	48" X 12'-0"	48	144	14	116	4	3	9	34	4	2	3/4	1	1-1/4	3/4	3790	141	4110
VHPR4816	48" X 16'-0"	48	192	14	164	4	3	9	34	4	2	3/4	1-1/4	1-1/4	3/4	4870	185	5510
VHPR5412	54" X 12'-7"	54	151	15-1/2	120	4	4	10	38	4	2-1/2	3/4	1-1/4	1-1/4	3/4	4450	185	5510
VHPR5416	54" X 16'-0"	54	192	15-1/2	161	6	4	10	38	5	2-1/2	3/4	1-1/4	1-1/4	3/4	5590	240	7150
VHPR6013	60" X 12'-10"	60	154	17	120	6	4	10	42	5	2-1/2	1	1-1/2	1-1/4	3/4	6420	231	6970
VHPR6016	60" X 16'-0"	60	192	17	158	6	4	10	42	5	2-1/2	1	1-1/2	1-1/4	3/4	7750	293	8730
VHPR7213	72" X 13'-4"	72	160	20	120	6	4	12	51	5	3	1	2	1-1/4	3/4	8180	346	10300
VHPR7218	72" X 18'-0"	72	216	20	176	6	4	12	51	6	3	1	2	1-1/4	3/4	10540	476	14200
VHPR8413	84" X 13'-10"	84	166	23	120	6	4	12	60	6	3	1	2	1-1/4	3/4	11960	480	14400
VHPR8416	84" X 16'-0"	84	192	23	146	8	4	12	60	8	3	1	2	1-1/4	3/4	13500	562	16700
VHPR8418	84" X 18'-0"	84	216	23	170	8	4	12	60	8	3	1	2	1-1/4	3/4	14910	638	19000
VHPR9614	96" X 14'-4"	96	172	26	120	8	4	12	68	8	4	1	2-1/2	1-1/4	3/4	14420	649	19300
VHPR9616	96" X 16'-0"	96	192	26	140	8	4	12	68	8	4	1	2-1/2	1-1/4	3/4	15770	733	21800
VHPR9618	96" X 18'-0"	96	216	26	164	8	4	12	68	8	4	1	2-1/2	1-1/4	3/4	17390	833	24800

CAPACITY BASED ON 80% OF VOLUME AND 86°F AMMONIA

RVS STD. ASME 250# HORIZONTAL THERMOSYPHON RECEIVERS

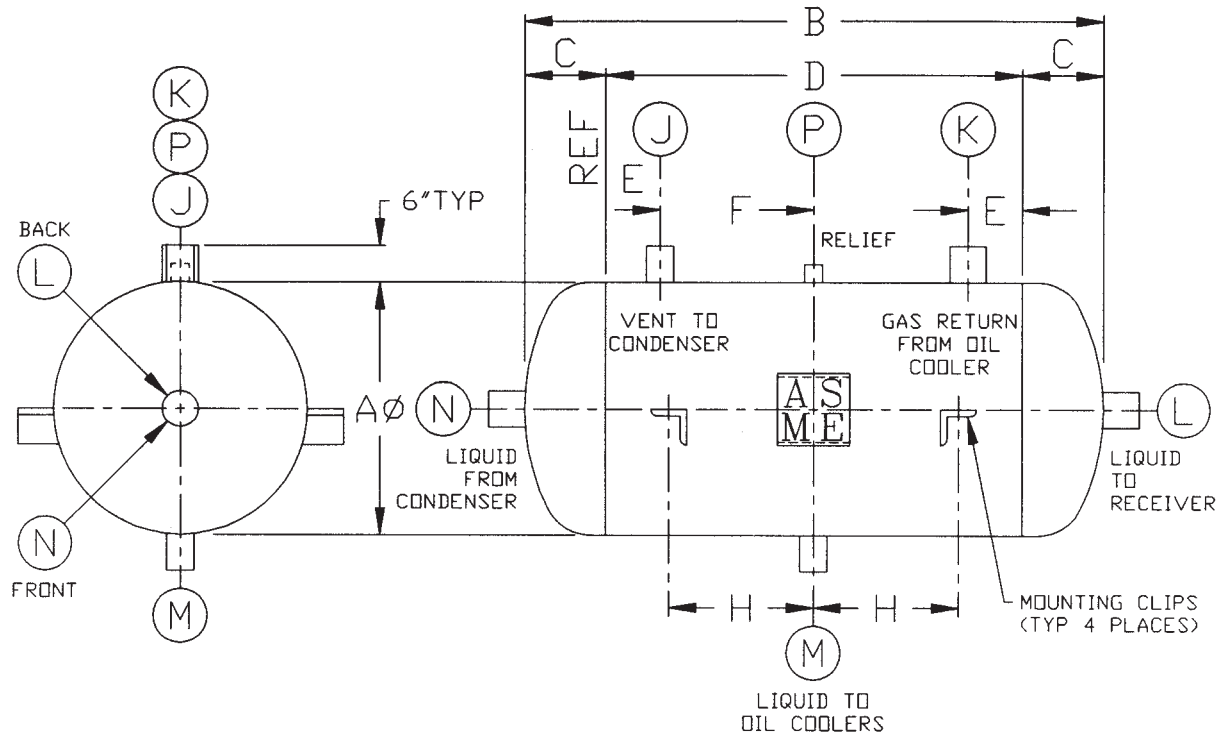


Model No.	Heat of Rejection (BTU/Min.)	Size	A	B	C	D	E	F	H	J	K	L	M	N	P	Weight lbs.
HTR0848	1900	8" x 48"	8-5/8	48	4	40	3	20	12	1-1/4	1-1/2	1-1/4	1-1/4	1-1/4	1/2	150
HTR1048	3300	10" x 48"	10-3/4	48	5	38	3	19	12	1-1/2	2	2	1-1/2	2	1/2	210
HTR1248	5000	12" x 48"	12-3/4	48	5-1/2	37	3	18-1/2	12	2	2	2	2	2	1/2	250
HTR1272	8800	12" x 72"	12-3/4	72	5-1/2	61	4	30-1/2	18	2-1/2	3	2-1/2	2-1/2	2-1/2	1/2	350
HTR1672	14300	16" x 72"	16	72	6-1/2	59	4	29-1/2	18	3	4	3	2-1/2	3	1/2	380
HTR2072	18000	20" x 72"	20	72	7-1/2	57	4	28-1/2	18	3	4	4	3	4	1/2	580
HTR2472	33200	24" x 72"	24	72	8-1/4	55-1/2	6	27-3/4	18	4	5	5	4	5	1/2	700
HTR3084	50800	30" x 84"	30	84	9-1/2	65	6	32-1/2	21	5	6	8	4	8	1/2	1010

THERMOSYPHON LINE SIZING									
LINE SIZE	1-1/4	1-1/2	2	2-1/2	3	4	5	6	
LIQUID TO OIL COOLER	2.1	3.3	7.7	14.5	24.1	50.6	79.7	227	
GAS FROM OIL COOLER	1.4	2.5	5.1	8.0	14.0	24.5	47.0	75.8	
VENT TO CONDENSER	1.9	3.4	6.8	10.7	18.7	32.7	62.7	101	

CAPACITIES IN 1000 BTU/MIN HEAT OF REJECTION

RVS STD. ASME 250# VERTICAL THERMOSYPHON RECEIVERS

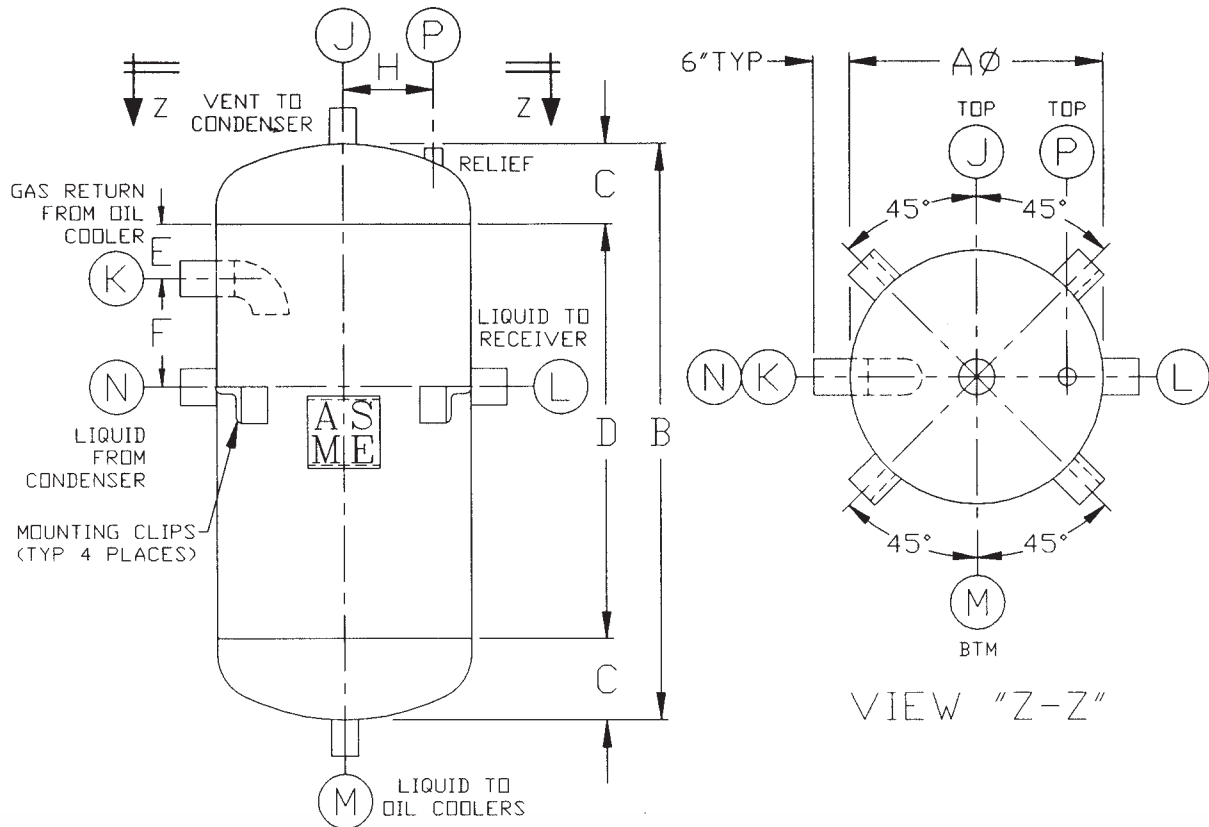


Model No.	Heat of Rejection (BTU/Min.)	Size	A	B	C	D	E	F	H	J	K	L	M	N	P	Weight
VTR0848	1900	8" x 48"	8-5/8	48	4	40	3	6	3	1-1/4	1-1/2	1-1/4	1-1/4	1-1/4	1/2	150
VTR1048	3300	10" x 48"	10-3/4	48	5	38	3	6	4	1-1/2	2	2	1-1/2	2	1/2	210
VTR1248	5000	12" x 48"	12-3/4	48	5-1/2	37	3	6	5	2	2	2	2	2	1/2	250
VTR1272	8800	12" x 72"	12-3/4	72	5-1/2	61	4	8	5	2-1/2	3	2-1/2	2-1/2	2-1/2	1/2	350
VTR1672	14300	16" x 72"	16	72	6-1/2	59	4	9	5	3	4	3	2-1/2	3	1/2	380
VTR2072	18000	20" x 72"	20	72	7-1/2	57	4	10	6	3	4	4	3	4	1/2	590
VTR2472	33200	24" x 72"	24	72	8-1/4	55-1/2	6	12	7	4	5	5	4	5	1/2	710
VTR3084	50800	30" x 84"	30	84	9-1/2	65	6	12	9	5	6	8	4	8	1/2	1030

THERMOSYPHON LINE SIZING								
LINE SIZE	1-1/4	1-1/2	2	2-1/2	3	4	5	6
LIQUID TO OIL COOLER	2.1	3.3	7.7	14.5	24.1	50.6	79.7	227
GAS FROM OIL COOLER	1.4	2.5	5.1	8.0	14.0	24.5	47.0	75.8
VENT TO CONDENSER	1.9	3.4	6.8	10.7	18.7	32.7	62.7	101

CAPACITIES IN 1000 BTU/MIN HEAT OF REJECTION


RVS STD. ASME 250# VERTICAL CONTROLLED PRESSURE RECEIVERS

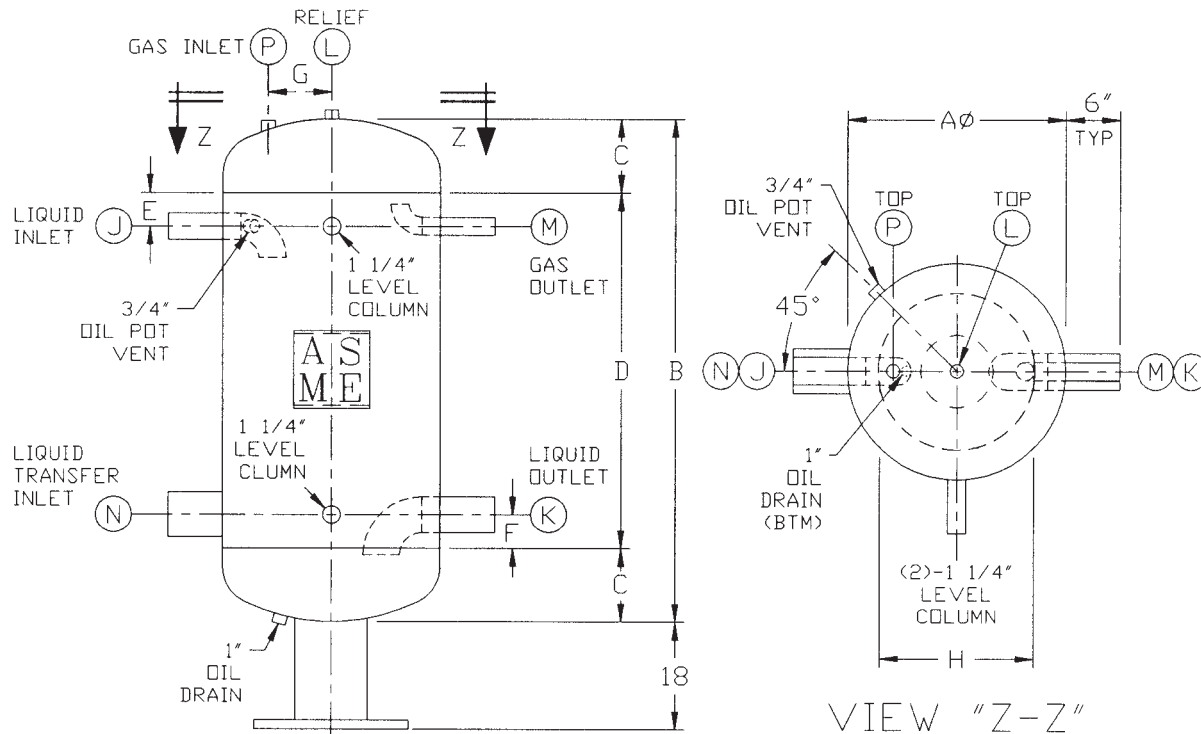

Model No.	Size	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Weight lbs.	Internal Volume cu. ft.	Pump Down Capacity lbs. R717
VCPR2012	20" X 12'-0"	20	144	7-1/2	129	3	3	5	14	3/4	1-1/4	1/2	3/4	1-1/4	3/4	1130	23.7	706
VCPR2412	24" X 12'-0"	24	144	8-1/4	127-1/2	3	3	6	17	1	1-1/4	1/2	3/4	1-1/4	3/4	1375	34.2	1020
VCPR2416	24" X 16'-0"	24	192	8-1/4	175-1/2	3	3	6	17	1-1/4	1-1/2	1/2	3/4	1-1/4	3/4	1780	46.2	1380
VCPR3012	30" X 11'-7"	30	120	9-1/2	125	3	3	7-1/2	21	1-1/4	1-1/2	1/2	3/4	2	3/4	1760	54.7	1630
VCPR3612	36" X 11'-10"	36	120	11	122	4	3	9	26	1-1/4	2	1/2	3/4	2	3/4	2150	76.8	2320
VCPR4212	42" X 12'-0"	42	144	12-1/2	119	4	3	9	30	1-1/2	2	3/4	3/4	2	3/4	3300	106	3160
VCPR4812	48" X 12'-0"	48	144	14	116	4	3	9	34	2	2-1/2	3/4	1-1/4	3	3/4	3790	141	4110
VCPR4816	48" X 16'-0"	48	192	14	164	4	3	9	34	2	2-1/2	3/4	1-1/4	3	3/4	4870	185	5510
VCPR5412	54" X 12'-7"	54	151	15-1/2	120	4	4	10	38	2	3	3/4	1-1/4	4	3/4	4450	185	5510
VCPR5416	54" X 16'-0"	54	192	15-1/2	161	6	4	10	38	2	3	3/4	1-1/4	4	3/4	5590	240	7150
VCPR6013	60" X 12'-10"	60	154	17	120	6	4	10	42	2	3	1	1-1/4	4	3/4	6420	231	6970
VCPR6016	60" X 16'-0"	60	192	17	158	6	4	10	42	2-1/2	4	1	1-1/2	5	3/4	7750	293	8730
VCPR7213	72" X 13'-4"	72	160	20	120	6	4	12	51	2-1/2	4	1	1-1/2	5	3/4	8180	346	10300
VCPR7218	72" X 18'-0"	72	216	20	176	6	4	12	51	3	4	1	2	5	3/4	10540	476	14200
VCPR8413	84" X 13'-10"	84	166	23	120	6	4	12	60	3	4	1	2	5	3/4	11960	480	14400
VCPR8416	84" X 16'-0"	84	192	23	146	8	4	12	60	3	4	1	2	5	3/4	13500	562	16700
VCPR8418	84" X 18'-0"	84	216	23	170	8	4	12	60	3	4	1	2	5	1	14910	638	19000
VCPR9614	96" X 14'-4"	96	172	26	120	8	4	12	68	3	4	1	2	5	1	14420	649	19300
VCPR9616	96" X 16'-0"	96	192	26	140	8	4	12	68	3	5	1	2	5	1	15770	733	21800
VCPR9618	96" X 18'-0"	96	216	26	164	8	4	12	68	4	5	1	2-1/2	6	1	17390	833	24800


CAPACITY BASED ON 80% OF VOLUME AND 86°F AMMONIA

RVS STD. ASME 250# VERTICAL PILOT RECEIVERS

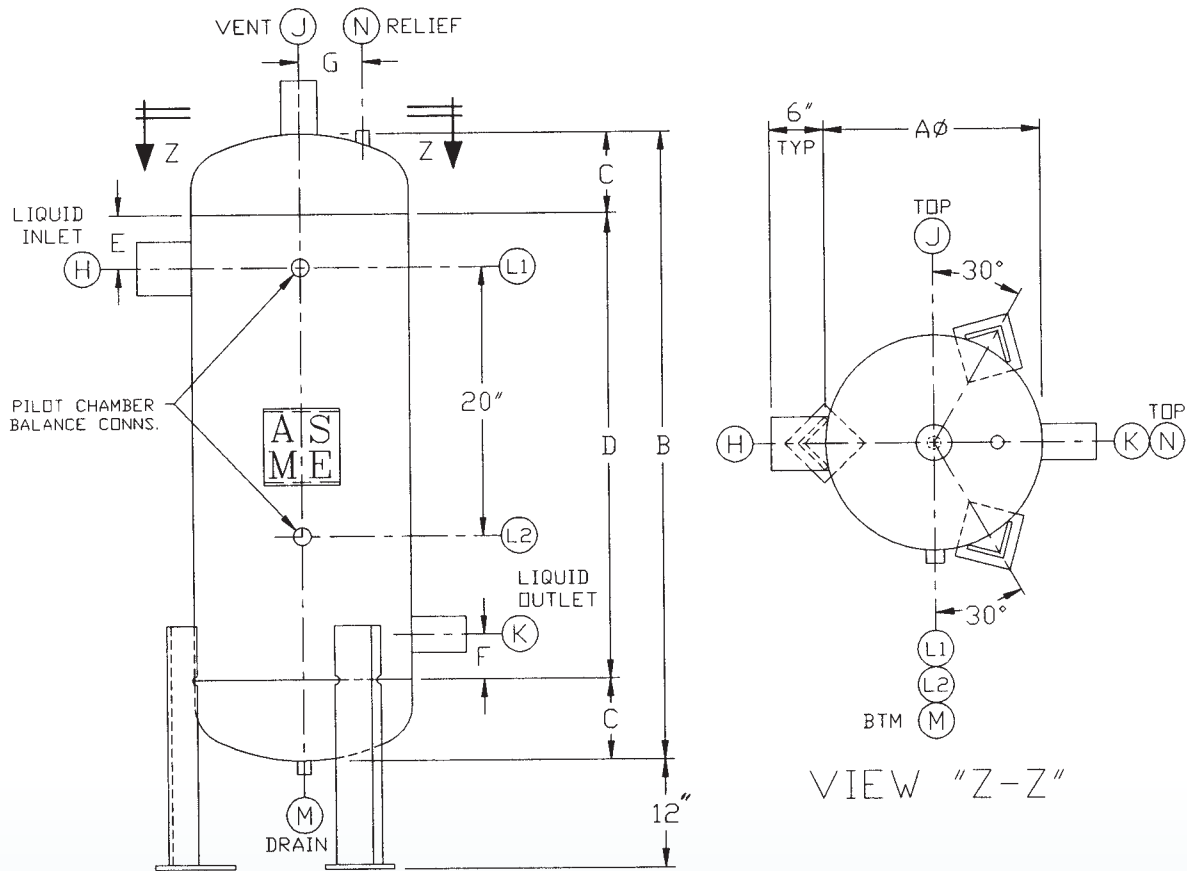

Model No.	Size	A	B	C	D	E	F	G	H	J	K	L	M	N	Capacity Tons	Weight lbs.
VPR1242A	12" x 42"	12-3/4	42	5-1/2	31	3	3	5	1-1/2	3/4	3/4	3/4	1/2	1/2	75	250
VPR1242B	12" x 42"	12-3/4	42	5-1/2	31	3	3	5	2	3/4	1	3/4	1/2	1/2	135	250
VPR1242C	12" x 42"	12-3/4	42	5-1/2	31	3	3	5	2-1/2	3/4	1-1/4	3/4	1/2	1/2	245	250
VPR1242D	12" x 42"	12-3/4	42	5-1/2	31	4	3	5	3	1	1-1/2	3/4	1/2	1/2	400	250
VPR1242E	12" x 42"	12-3/4	42	5-1/2	31	4	3	5	4	1-1/4	2	3/4	1/2	1/2	700	250
VPR1242F	12" x 42"	12-3/4	42	5-1/2	31	6	3	5	5	1-1/2	2	3/4	1/2	1/2	850	250
VPR1648A	16" x 48"	16	48	6-1/2	35	6	3	5	6	2	2-1/2	3/4	1/2	1/2	1300	300
VPR1648B	16" x 48"	16	48	6-1/2	35	8	4	5	8	2	3	3/4	1/2	1/2	2300	300
VPR1648C	16" x 48"	16	48	6-1/2	35	8	4	5	8	2-1/2	4	3/4	1/2	1/2	4000	300

RVS STD. ASME 300# VERTICAL COALESCING OIL SEPARATORS for NH₃

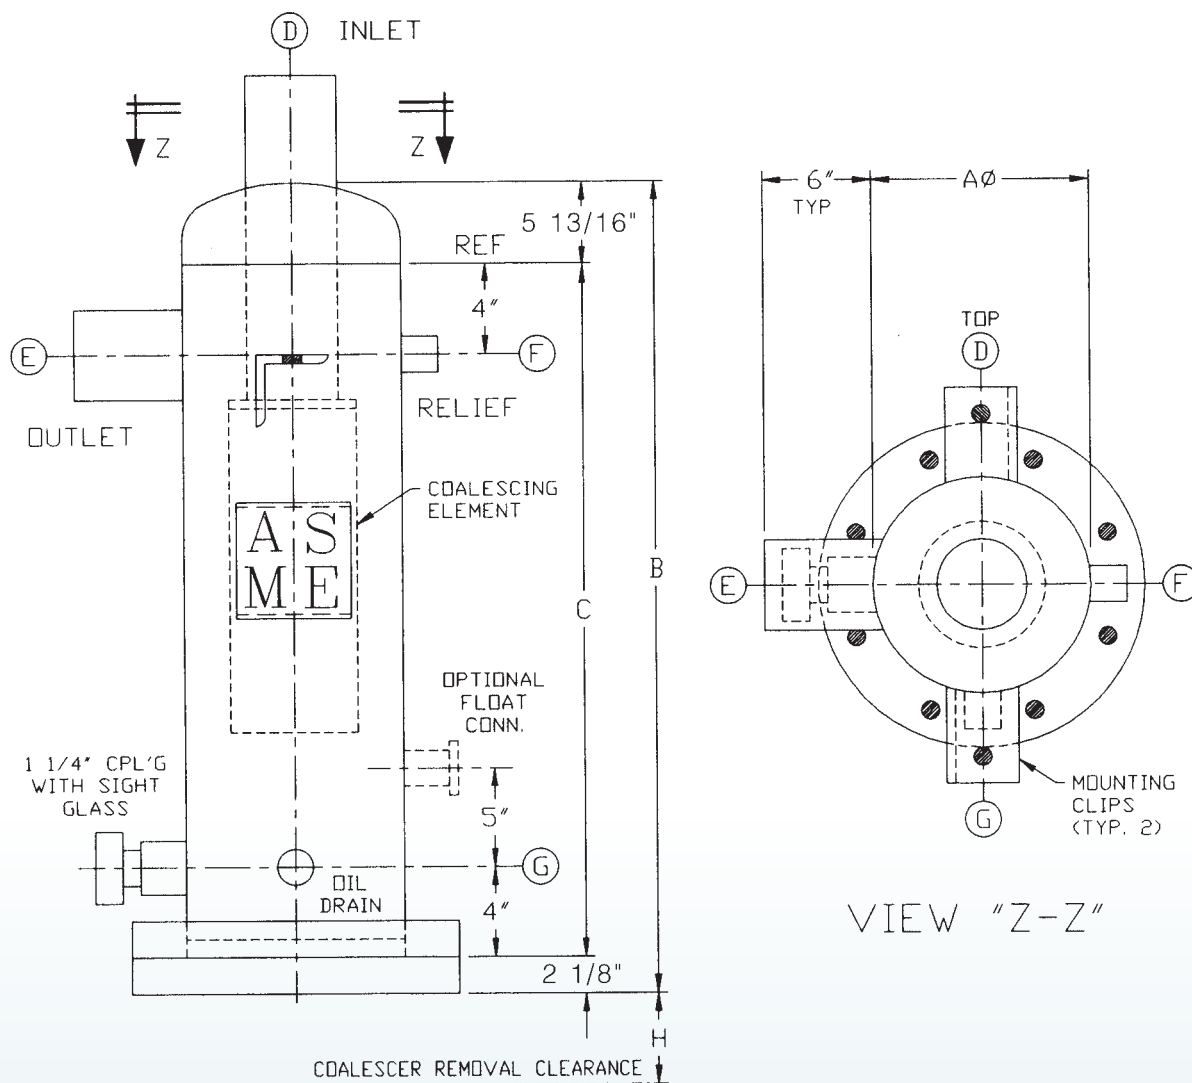

Model No.	Size	A	B	C	D	E	F	G	H	Weight
VCOS1444	14" X 44"	14	44	36-1/16	3	3	1/2	3/4	18	850
VCOS1462	14" X 62"	14	62	54-1/16	3	3	1/2	3/4	36	900

Consult Factory for Ratings.



RVS VERTICAL ACCUMULATOR CAPACITIES (TONS) NH₃

Diameter	Volume	-50°F	-40°F	-30°F	-20°F	-10°F	0°F	+10°F	+20°F	+30°F
	FT ³ /FT	14.3 in. vac.	8.7 in. vac.	1.6 in. vac.	3.6 #	9.0 #	15.7 #	23.8 #	33.5 #	45.0 #
12	0.8	10	14	16	22	24	28	35	38	40
16	1.3	18	24	29	33	40	45	55	60	65
20	2.0	25	35	40	55	60	70	85	95	100
24	3.0	40	55	65	85	95	110	125	140	155
30	4.6	65	85	100	125	145	165	195	215	240
36	6.7	95	120	150	185	210	235	285	315	350
42	9.2	130	170	205	255	290	325	365	435	480
48	12.0	165	220	270	335	375	425	505	570	630
54	15.8	220	290	360	415	495	560	665	745	830
60	19.5	270	360	445	510	615	690	825	920	1020
66	23.7	330	440	540	620	750	840	1010	1120	1240
72	28.0	390	515	640	735	880	990	1180	1340	1470
78	33.0	460	610	755	865	1040	1170	1400	1570	1730
84	38.0	530	700	870	995	1190	1350	1600	1800	1990
96	50.0	695	920	1140	1310	1570	1770	2110	2360	2620
108	63.5	890	1170	1450	1660	1990	2250	2680	2990	3330
120	78.5	1090	1450	1790	2060	2460	2780	3310	3700	4110
144	113.7	1570	2080	2580	2960	3550	4000	4770	5330	5920

Capacities are based on a liquid feed temperature of 96°F.

For Circulating Systems:



Add 15% to the capacity ratings if the liquid make up temperature is +30°F or below.

For Direct Feed Systems:

Add 15% to the capacity rating if the evaporators are fed with high pressure liquid that is cooled to +30°F or below.

RVS STD. ASME 150# VERTICAL ACCUMULATORS

FOR USE WITH STD. RVS LIQUID TRANSFER SYSTEMS

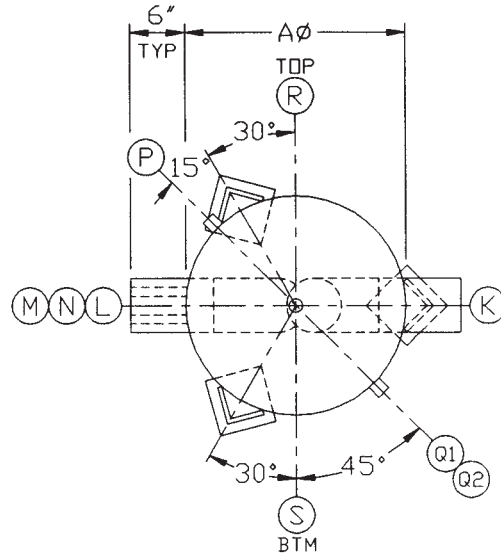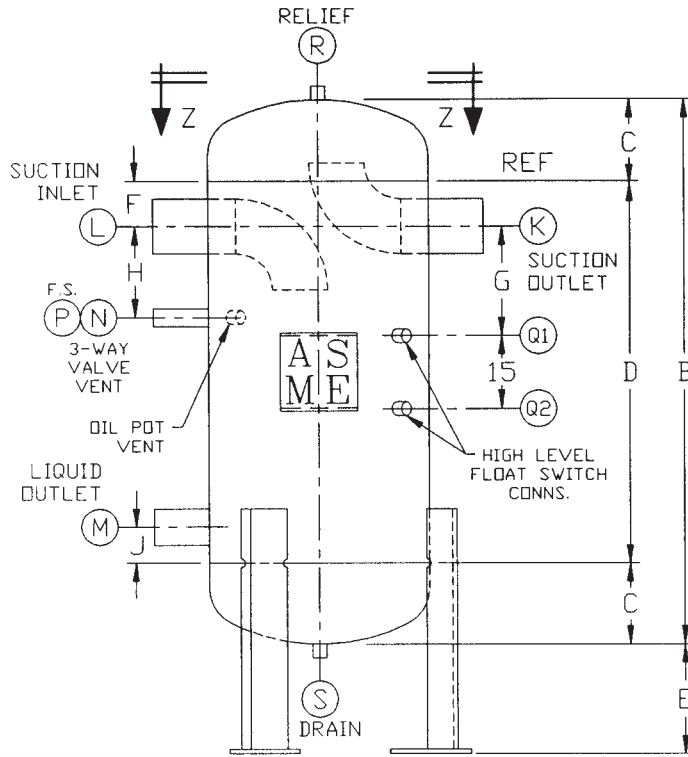



VIEW "Z-Z"

NOTE: FOR VESSEL SIZES
78"Ø THRU 96"Ø,
4 LEGS REQUIRED
EVERY 90°

Model No.	Size	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	Weight lbs.
VA1272	12" X 72"	12-3/4	72	5 1/2	61	22	3	21	12	3	2	2	2	3/4	3/4	3/4	1/2	1	325
VA1696	16" X 96"	16	96	6-1/2	83	21	4	22-1/2	15	3	3	3	2	3/4	3/4	3/4	1/2	1	550
VA2096	20" X 96"	20	96	7-1/2	81	24	5	24	18	4	4	4	3	1-1/4	3/4	3/4	1/2	1	650
VA2496	24" X 96"	24	96	8-1/4	79-1/2	24	6	25-1/2	18	4	5	5	3	1-1/4	3/4	3/4	1/2	1	780
VA30120	30" X 120"	30	120	9-1/2	101	30	6	25-1/2	18	4	5	5	3	1-1/4	3/4	3/4	1/2	1	1350
VA36120	36" X 120"	36	120	11	98	30	6	27	20	5	6	6	4	1-1/4	3/4	3/4	1/2	1	1750
VA42120	42" X 120"	42	120	12-1/2	95	30	8	30	24	5	8	8	4	1-1/4	3/4	3/4	1/2	1	2400
VA48120	48" X 120"	48	120	14	92	30	8	30	24	5	8	8	4	1-1/4	3/4	3/4	3/4	1	2500
VA54132	54" X 132"	54	132	15-1/2	101	28	8	30	24	5	8	8	4	1-1/4	3/4	3/4	3/4	1	3250
VA60144	60" X 144"	60	144	17	110	26	10	33	27	5	10	10	4	1-1/4	3/4	3/4	3/4	1	3950
VA66144	66" X 144"	66	144	18-1/2	107	25	10	33	27	5	10	10	4	1-1/4	3/4	3/4	3/4	1	4500
VA72144	72" X 144"	72	144	20	104	23	12	36	30	5	10	12	4	1-1/4	3/4	3/4	1	1	4930
VA78144	78" X 144"	78	144	21-1/2	101	22	12	36	30	5	10	12	4	1-1/4	3/4	3/4	1	1	6950
VA84166	84" X 166"	84	166	23	120	20	12	36	30	5	10	12	4	1-1/4	3/4	3/4	1	1	8330
VA96172	96" X 172"	96	172	26	120	18	12	36	30	5	12	12	4	1-1/4	3/4	3/4	1-1/4	1	10040

BASED ON 0°F SUCTION

RVS STD. ASME 150# VERTICAL ACCUMULATORS WITH BOIL-OUT COIL

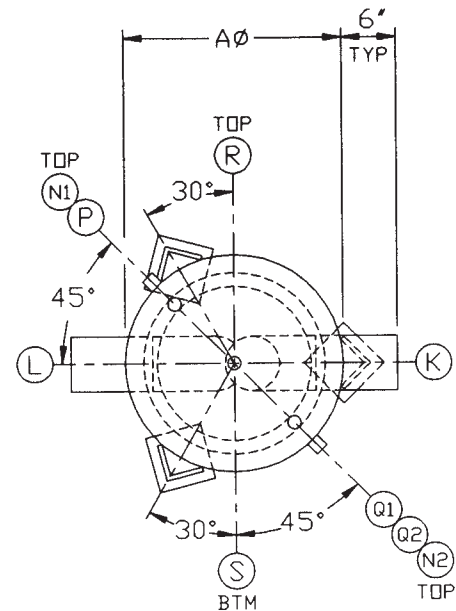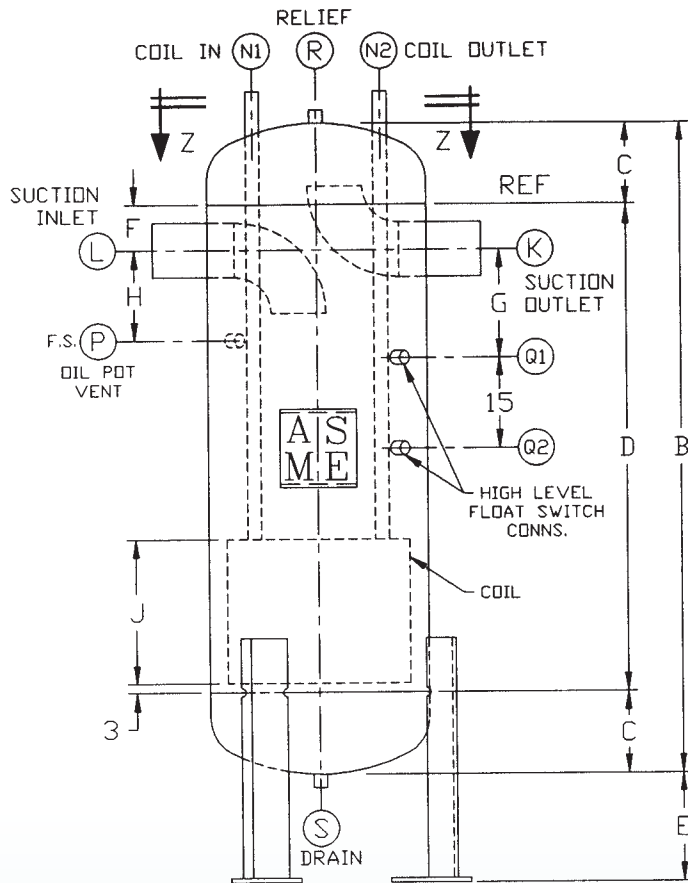

VIEW "Z-Z"

Model No.	Size	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	Weight lbs.
VACA1696	16" X 96"	16	96	6-1/2	83	12	4	22-1/2	15	24	3	3	56'	3/4	3/4	3/4	1/2	1	650
VACA2096	20" X 96"	20	96	7-1/2	81	12	5	24	18	29	4	4	74'	1	3/4	3/4	1/2	1	810
VACA2496	24" X 96"	24	96	8-1/4	79-1/2	12	6	25-1/2	18	37	5	5	83'	1-1/4	3/4	3/4	1/2	1	1030
VACA30120	30" X 120"	30	120	9-1/2	101	18	6	25-1/2	18	42	5	5	132'	1-1/4	3/4	3/4	1/2	1	1740
VACA36120	36" X 120"	36	120	11	98	18	6	27	20	50	6	6	162'	1-1/2	3/4	3/4	1/2	1	2340
VACA42120	42" X 120"	42	120	12-1/2	95	18	8	30	24	34	8	8	235'	1-1/2	3/4	3/4	1/2	1	3250
VACA48132	48" X 132"	48	132	14	104	18	8	30	24	39	8	8	256'	2	3/4	3/4	3/4	1	3440
VACA54132	54" X 132"	54	132	15-1/2	101	18	8	30	24	42	8	8	319'	2	3/4	3/4	3/4	1	4400
VACA60144	60" X 144"	60	144	17	110	18	10	33	27	45	10	10	399'	2	3/4	3/4	3/4	1	5410

BASED ON 0°F SUCTION

Alternate Coil Selection

Model No.	Size	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	Weight lbs.
VACB42120	42" X 120"	42	120	12-1/2	95	18	8	30	24	46	8	8	176'	1-1/2	3/4	3/4	1/2	1	3040
VACB48132	48" X 132"	48	132	14	104	18	8	30	24	53	8	8	193'	2	3/4	3/4	3/4	1	3210
VACB54132	54" X 132"	54	132	15-1/2	101	18	8	30	24	53	8	8	219'	2	3/4	3/4	3/4	1	4040
VACB60144	60" X 144"	60	144	17	110	18	10	33	27	53	10	10	249'	2	3/4	3/4	3/4	1	4860



RVS HORIZONTAL ACCUMULATOR CAPACITIES (TONS) NH₃

Diameter	35°F Liquid Feed Temperature					96°F Liquid Feed Temperature				
	Volume	-50°F	-40°F	-30°F	-20°F	-10°F	0°F	+10°F	+20°F	+30°F
	FT ³ /FT	14.3 in. vac.	8.7 in. vac.	1.6 in. vac.	3.6 #	9.0 #	15.7 #	23.8 #	33.5 #	45.0 #
30	5.0	97	115	129	143	152	171	189	231	240
36	7.2	155	180	200	225	230	265	300	360	380
42	9.9	210	250	275	310	320	365	410	490	520
48	13	275	325	360	405	420	480	540	650	685
54	17	360	425	470	530	550	630	710	850	895
60	21	445	525	585	655	675	780	875	1050	1100
72	30	640	750	835	940	970	1110	1250	1500	1580
84	44	870	1050	1140	1280	1320	1520	1710	2050	2160
96	54	1150	1330	1500	1690	1740	2000	2250	2700	2840
108	67	1430	1680	1860	2100	2160	2480	2790	3350	3530
120	84	1790	2100	2330	2630	2700	3100	3490	4190	4430
144	122	3260	3820	4240	4790	4910	5640	5080	6100	6430

Technical drawing of a 150-gallon oil pot, showing front and top views with dimensions and callouts.

Top View Dimensions:

- Overall width: 120"
- Overall height: 27"
- Distance from front edge to centerline: 60"
- Distance from centerline to back edge: 60"
- Distance from front edge to lift lugs: 18"
- Distance from centerline to lift lugs: 6"
- Distance from centerline to saddle pads: 6" (TYP.)
- Distance from front edge to saddle pads: 120" (TYP.)
- Distance from back edge to saddle pads: 120" (TYP.)
- Distance from front edge to ASME stamp: 12"
- Distance from centerline to ASME stamp: 6"
- Distance from back edge to ASME stamp: 12"
- Distance from front edge to liquid outlet: 6"
- Distance from centerline to liquid outlet: 6"
- Distance from back edge to liquid outlet: 120" (TYP.)

Front View Dimensions:


- Overall height: 27"
- Distance from top edge to centerline: 12"
- Distance from centerline to bottom edge: 12"
- Distance from front edge to centerline: 60"
- Distance from centerline to back edge: 60"
- Distance from front edge to lift lugs: 18"
- Distance from centerline to lift lugs: 6"
- Distance from front edge to saddle pads: 120" (TYP.)
- Distance from back edge to saddle pads: 120" (TYP.)
- Distance from front edge to ASME stamp: 12"
- Distance from centerline to ASME stamp: 6"
- Distance from back edge to ASME stamp: 12"
- Distance from front edge to liquid outlet: 6"
- Distance from centerline to liquid outlet: 6"
- Distance from back edge to liquid outlet: 120" (TYP.)

Callouts and Labels:

- 3-WAY VALVE VENT (L)
- 3/4" HIGH LEVEL FLOAT SWITCH CONNS. (J, K)
- LIQUID OUTLET (J)
- RELIEF (M)
- SUCTION INLET (FRONT Ø45") (H)
- SUCTION OUTLET (G)
- LIFT LUGS (TYP. 2)
- ASME
- HIGH LEVEL
- 3/4" OIL POT VENT (FRONT) (L)
- SADDLE PADS (TYP. 2)
- SUMP (FLUSH) (K)
- 1" OIL DRAIN


Model No.	A	B	C	D	E	F	G	H	J	K	L	M	Surge Volume Cubic ft.	Weight lbs.
HA30139	30	139	9-1/2	28	5	3	5	5	2	4	1	1/2	23	1525
HA36142	36	142	11	28	5	4	6	6	2	4	1	1/2	30	1925
HA42145	42	145	12-1/2	29	6	6	6	6	3	5	1-1/4	1/2	42	2300
HA48148	48	148	14	30	6	9	8	8	3	5	1-1/4	3/4	56	2775
HA54151	54	151	15-1/2	30	8	11	8	8	4	6	1-1/4	3/4	74	3525
HA60154	60	154	17	31	8	14	8	10	4	6	1-1/4	3/4	92	4000
HA72160	72	160	20	32	8	19	10	10	4	6	1-1/4	1	138	4975
HA84166	84	166	23	33	8	24	10	12	4	8	1-1/4	1	192	7975
HA96172	96	172	26	34	8	29	12	12	4	8	1-1/4	1-1/4	259	9525
HA108178	108	178	29	36	8	34	12	12	(2)4	8	2	1-1/4	336	13825
HA120184	120	184	32	37	8	39	14	16	(2)4	12	2	1-1/4	410	15975
HA144196	144	196	38	39	8	49	16	18	(2)4	12	2	1-1/4	585	24925

RVS STD. ASME 150# VERTICAL INTERCOOLERS WITHOUT COIL

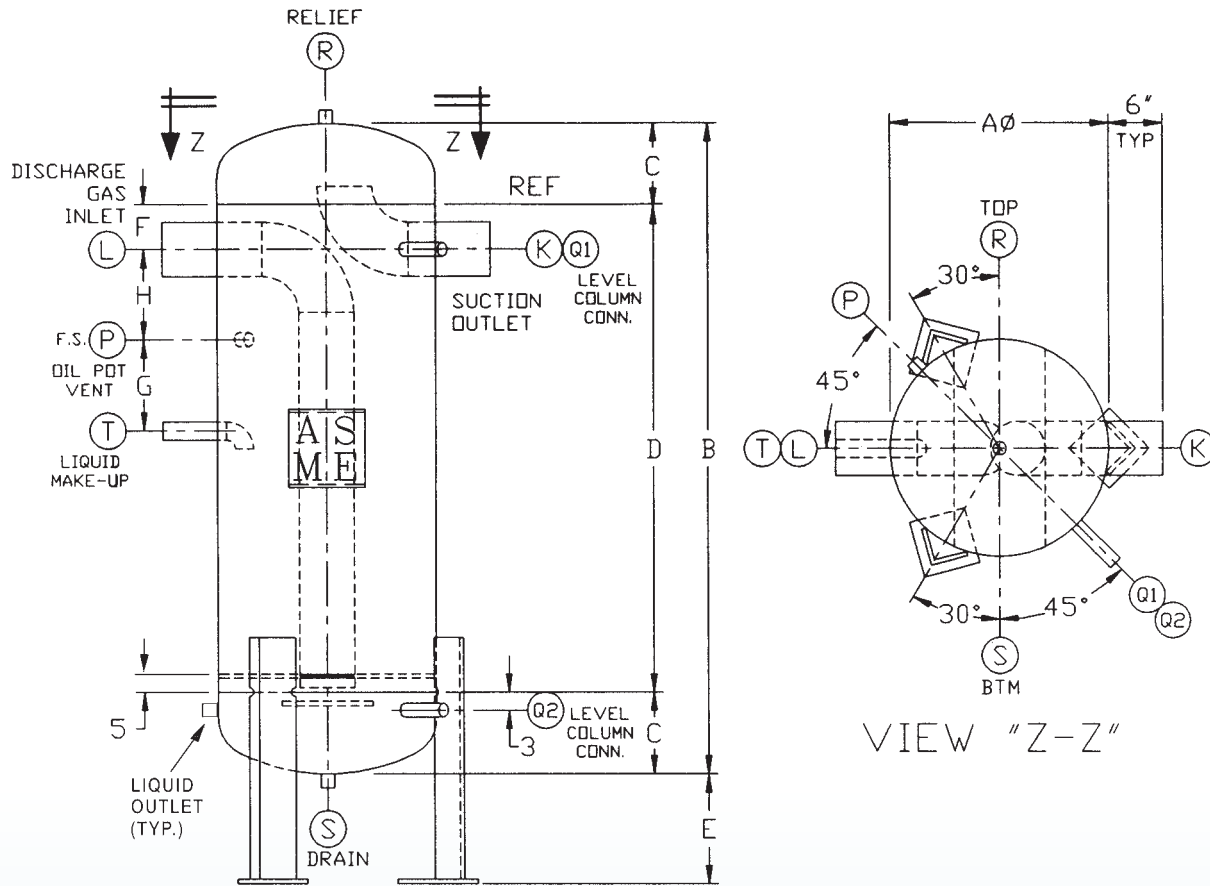

Model No.	Size	A	B	C	D	E	F	G	H	K	L	P	Q	R	S	T	Booster Capacity	Comp. @ 10°F Capacity	Weight lbs.
VI1696	16" X 96"	16	96	6-1/2	83	12	4	22	15	3	3	3/4	1-1/4	1/2	1	1/2	42 TR	52 TR	580
VI2096	20" X 96"	20	96	7 1/2	81	12	4	22	15	3	3	3/4	1-1/4	1/2	1	1/2	65 TR	81 TR	710
VI24102	24" X 102"	24	102	8-1/4	85-1/2	12	5	20	18	4	4	3/4	1-1/4	1/2	1	3/4	95 TR	119 TR	910
VI30108	30" X 108"	30	108	9-1/2	89	12	5	22	18	4	4	3/4	1-1/4	1/2	1	3/4	148 TR	185 TR	1390
VI36120	36" X 120"	36	120	11	98	12	6	25	18	5	5	3/4	1-1/4	1/2	1	3/4	217 TR	271 TR	1740
VI42120	42" X 120"	42	120	12-1/2	95	12	6	22	20	6	6	3/4	1-1/4	1/2	1	1	278 TR	347 TR	2330
VI48132	48" X 132"	48	132	14	104	12	6	26	20	6	6	3/4	1-1/4	3/4	1	1	384 TR	480 TR	2850
VI54132	54" X 132"	54	132	15-1/2	101	12	8	19	24	8	8	3/4	1-1/4	3/4	1	1-1/4	505 TR	632 TR	3690
VI60144	60" X 144"	60	144	17	110	12	8	23	24	8	8	3/4	1-1/4	3/4	1	1-1/4	627 TR	784 TR	4400
VI66156	66" X 156"	66	156	18-1/2	119	12	8	22	24	8	8	3/4	1-1/4	3/4	1	1-1/4	790 TR	990 TR	5150
VI72160	72" X 160"	72	160	20	120	12	10	15	27	10	10	3/4	1-1/4	1	1	1-1/2	896 TR	1120 TR	5960


RVS STD. ASME 150# VERTICAL INTERCOOLERS WITH COIL

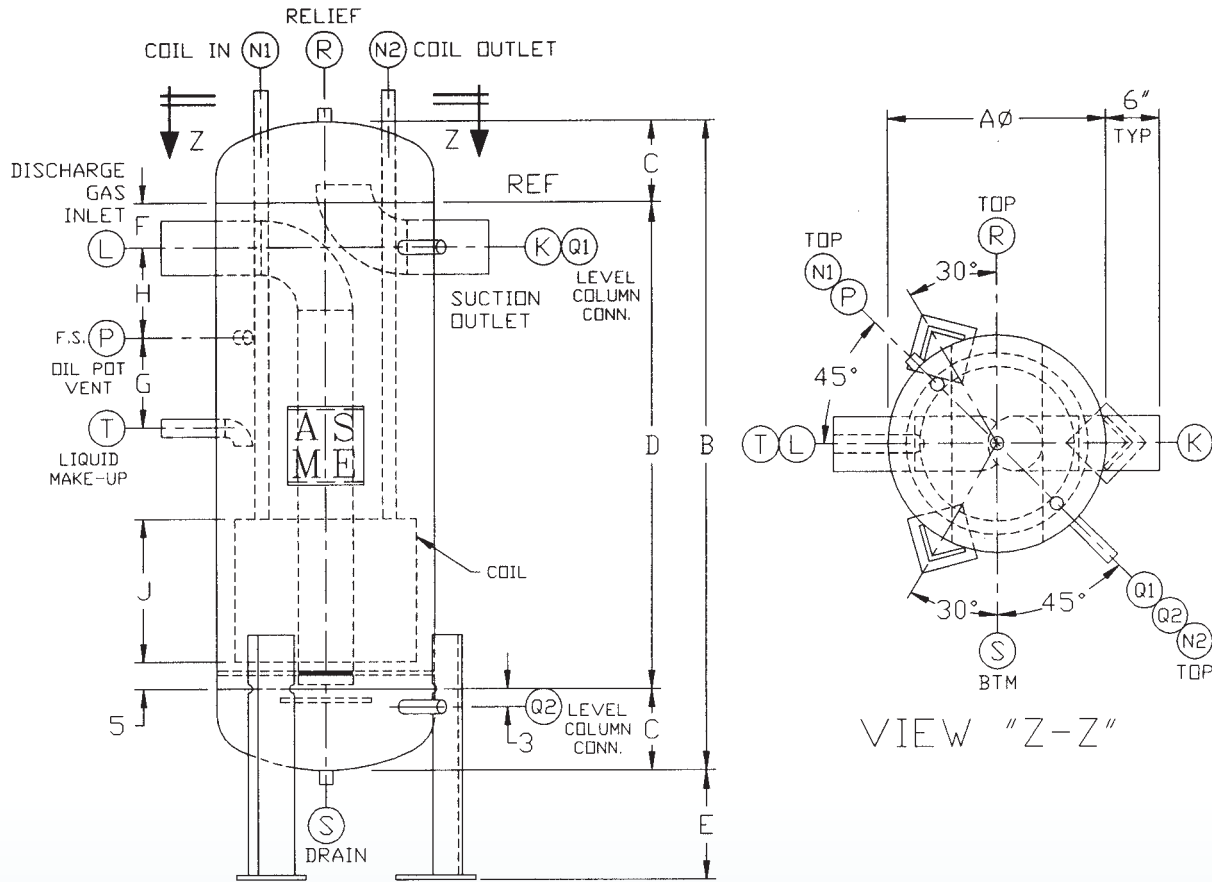

Coil Height
Coil Length (ft.)

Model No.	Size	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	Booster Capacity	Comp @ 10°F Capacity	Weight lbs.
VIC1696	16" X 96"	16	96	6-1/2	83	12	4	22	15	30	3	3	74'	3/4	3/4	1-1/4	1/2	1	1/2	42 TR	52 TR	700
VIC2096	20" X 96"	20	96	7-1/2	81	12	4	22	15	26	3	3	121'	3/4	3/4	1-1/4	1/2	1	1/2	65 TR	81 TR	900
VIC24102	24" X 102"	24	102	8-1/4	85-1/2	12	5	20	18	27	4	4	137'	1	3/4	1-1/4	1/2	1	3/4	95 TR	119 TR	1230
VIC30108	30" X 108"	30	108	9-1/2	89	12	5	22	18	30	4	4	170'	1-1/4	3/4	1-1/4	1/2	1	3/4	148 TR	185 TR	1950
VIC36120	36" X 120"	36	120	11	98	12	6	25	18	34	5	5	248'	1-1/4	3/4	1-1/4	1/2	1	3/4	217 TR	271 TR	2550
VIC42120	42" X 120"	42	120	12-1/2	95	12	6	22	20	34	6	6	280'	1-1/4	3/4	1-1/4	1/2	1	1	278 TR	347 TR	3250
VIC48132	48" X 132"	48	132	14	104	12	6	26	20	31	6	6	382'	1 1/2	3/4	1-1/4	3/4	1	1	384 TR	480 TR	4350
VIC54132	54" X 132"	54	132	15-1/2	101	12	8	19	24	32	8	8	411'	2	3/4	1-1/4	3/4	1	1-1/4	505 TR	632 TR	5300
VIC60144	60" X 144"	60	144	17	110	12	8	23	24	34	8	8	509'	2	3/4	1-1/4	3/4	1	1-1/4	627 TR	784 TR	6410
VIC66156	66" X 156"	66	156	18-1/2	119	12	8	22	24	34	8	8	590'	2	3/4	1-1/4	3/4	1	1-1/4	790 TR	990 TR	7470
VIC 72160	72" X 160"	72	160	20	120	12	10	15	27	34	10	10	867'	2-1/2	3/4	1-1/4	1	1	1 1/2	896 TR	1120 TR	9300

RVS STD. ASME 150# HORIZONTAL SURGE DRUMS

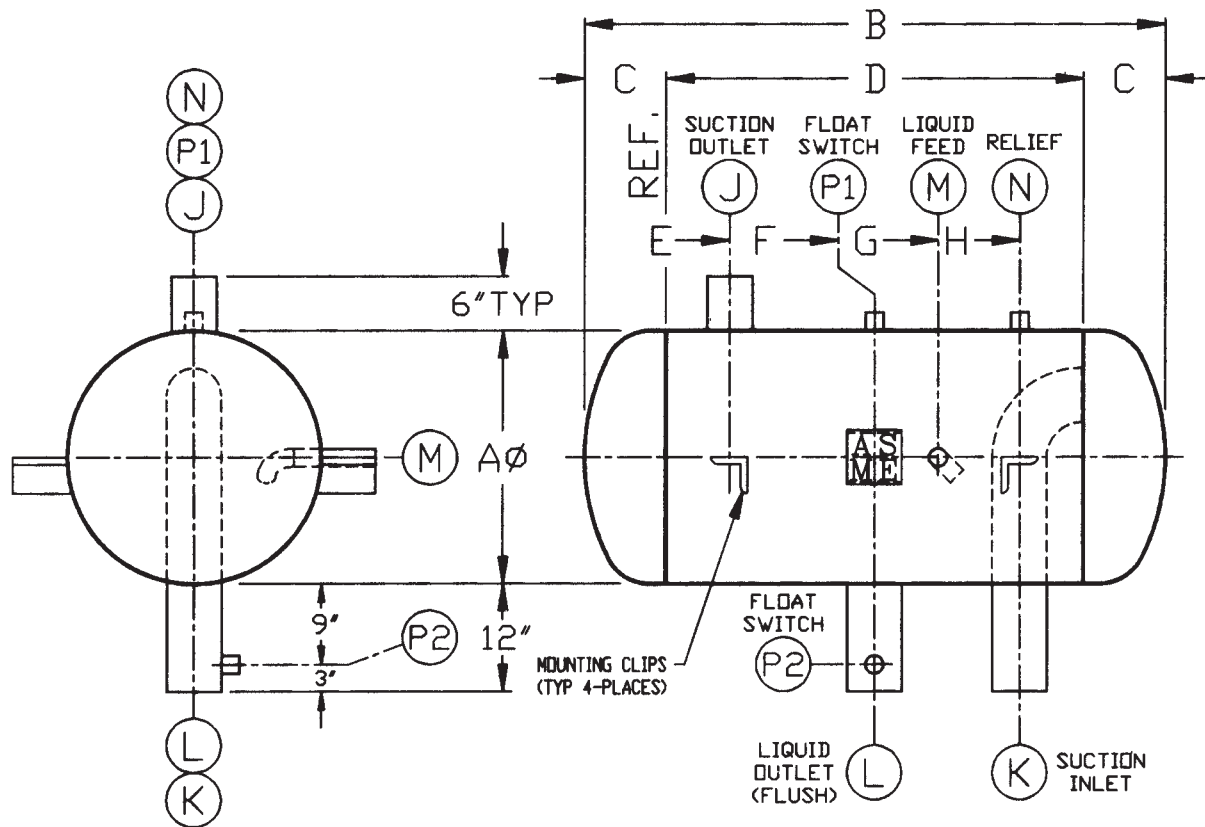

Model No.	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Surge Vol. Cubic Ft.	Weight lbs.
HSD12	12-3/4	48	5-1/2	37	3	18-1/2	26	34	2	2-1/2	2-1/2	1/2	1/2	3/4	1.1	225
HSD16	16	60	6-1/2	47	3	23-1/2	33	43	2-1/2	3	3	3/4	1/2	3/4	2.4	375
HSD20	20	72	7-1/2	57	3	28-1/2	41	53	3	4	4	3/4	1/2	3/4	4.8	550
HSD24	24	72	8-1/4	55 1/2	4	27-3/4	39	50	3	5	4	1	1/2	3/4	7.0	675
HSD30	30	96	9-1/2	77	4	38-1/2	55	71	4	5	5	1	1/2	3/4	16	1100
HSD36	36	96	11	74	6	37	53	68	4	6	6	1-1/4	1/2	3/4	24	1350
HSD42	42	120	12-1/2	95	6	47-1/2	68	87	5	8	8	1-1/4	3/4	3/4	42	1950


RVS Standard Horizontal Surge Drum Capacities (Tons) NH ₃											
Model No.	Diameter	30°F	20°F	10°F	0°F	-10°F	-20°F	-30°F	-40°F	-50°F	
HSD12	12-3/4	18	16	14	13	11	10	9	8	7	
HSD16	16	30	28	24	21	19	17	15	13	12	
HSD20	20	50	47	42	35	30	27	20	17	13	
HSD24	24	77	70	63	55	47	42	37	28	20	
HSD30	30	120	110	97	82	72	62	50	43	37	
HSD36	36	175	155	145	115	105	92	75	60	50	
HSD42	42	240	220	180	160	140	120	100	85	65	

Capacities of 12" & 16" based on connection sizes.

Capacities of 20" & larger based on high level at the center.

Surge capacities based on a 3" controlled level & surge to centerline of vessel.

RVS STD. ASME 150# VERTICAL SURGE DRUMS

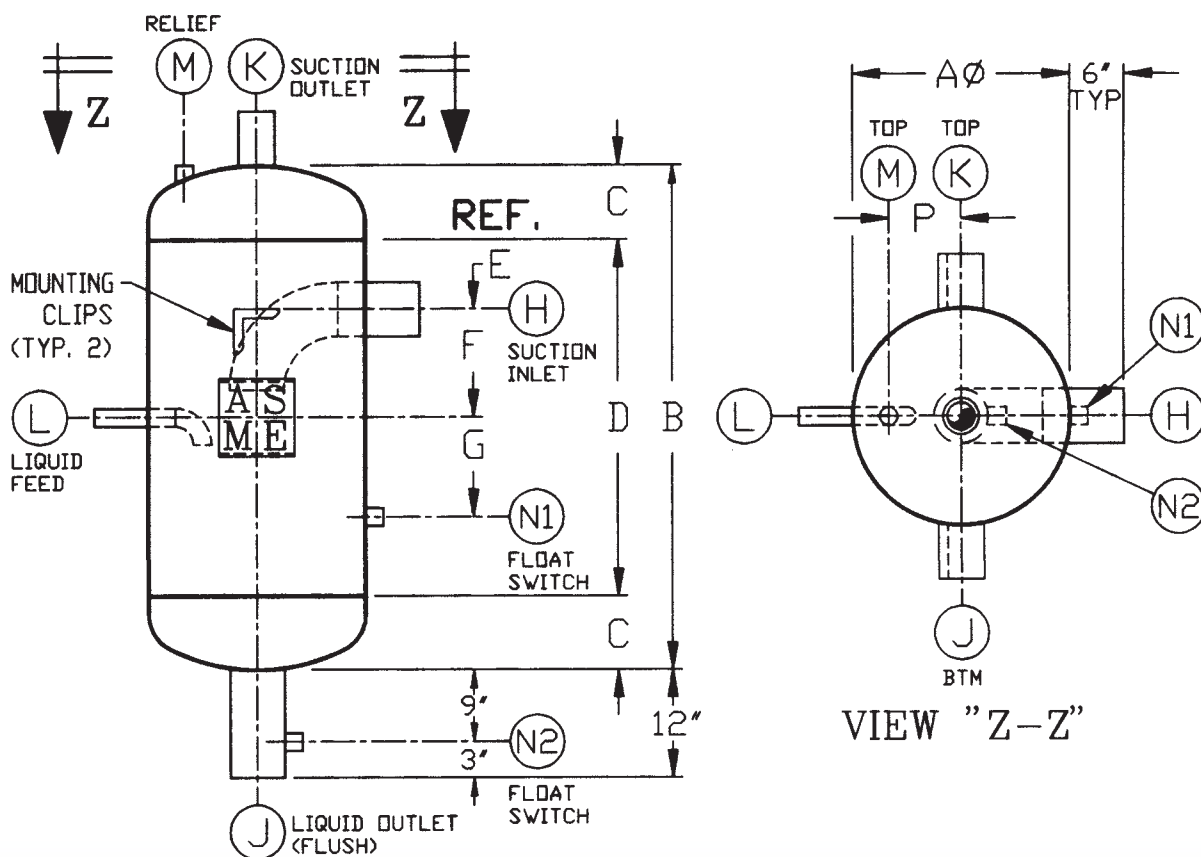

Model No.	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Surge Vol. Cubic Ft.	Weight lbs.
VSD12	12-3/4	48	5-1/2	37	5	18-1/2	31	2-1/2	2-1/2	2	1/2	1/2	3/4	3	1.3	200
VSD16	16	54	6-1/2	41	5	20-1/2	35	3	3	2-1/2	3/4	1/2	3/4	4	2.4	325
VSD20	20	60	7-1/2	45	5	22-1/2	39	4	4	3	3/4	1/2	3/4	4-1/2	4.2	425
VSD24	24	60	8-1/4	43 1/2	5	21-3/4	37-1/2	5	5	4	1	1/2	3/4	6	5.4	600
VSD30	30	72	9-1/2	53	6	26-1/2	47	6	6	4	1	1/2	3/4	8-1/2	11	800
VSD36	36	78	11	56	8	28	50	8	8	5	1-1/4	1/2	3/4	10	15	1150
VSD42	42	84	12-1/2	59	10	29-1/2	53	10	10	6	1-1/4	3/4	3/4	12	19	1475


RVS Standard Vertical Surge Drum Capacities (Tons) NH ₃											
Model No.	Diameter	30°F	20°F	10°F	0°F	-10°F	-20°F	-30°F	-40°F	-50°F	
VSD12	12-3/4	18	16	14	13	11	10	9	8	7	
VSD16	16	30	28	24	21	19	17	15	13	12	
VSD20	20	63	57	50	45	42	38	32	27	24	
VSD24	24	110	100	91	82	77	69	57	45	40	
VSD30	30	190	170	150	130	120	110	90	80	65	
VSD36	36	350	315	285	235	210	185	150	120	95	
VSD42	42	480	435	365	325	290	255	205	170	130	

Capacities of 12" thru 30" based on connection sizes.

Capacities of 36" & 42" based on vessel size.


Surge volume calculated from 3" above the bottom head seam to 6" below the bottom of the gas return elbow.

RVS STD. ASME 150# VERTICAL RECIRCULATOR VESSELS with DUAL PUMP SUCTIONS

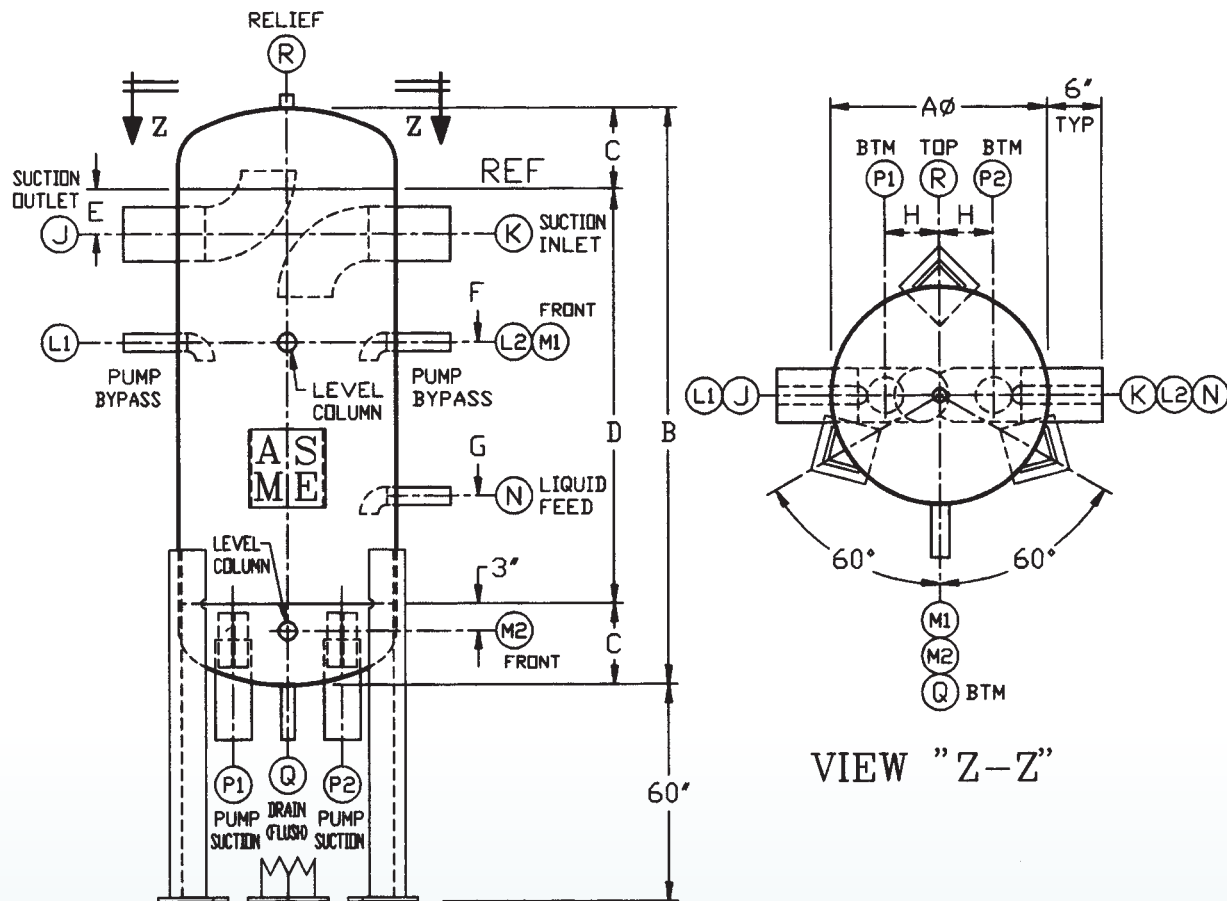


Model No.	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	Weight lbs.
VRV2496	24	96	8-1/4	79-1/2	5	23	61	7	4	4	3/4	1-1/2	3/4	4	1	1/2	1075
VRV3096	30	96	9 1/2	77	6	25	59	8	5	5	3/4	1-1/2	1	4	1	1/2	1350
VRV3696	36	96	11	74	6	27	56	10	6	6	3/4	1-1/2	1	4	1	1/2	1750
VRV42121	42	121	12-1/2	96	6	27	78	12	6	6	3/4	1-1/2	1-1/4	4	1	1/2	2300
VRV48124	48	124	14	96	8	32	78	14	8	8	3/4	1-1/2	1-1/4	4	1	3/4	2700
VRV54139	54	139	15-1/2	108	8	32	90	14	8	8	3/4	1-1/2	1-1/2	4	1	3/4	3600
VRV60142	60	142	17	108	10	37	90	14	10	10	3/4	1-1/2	1-1/2	4	1	3/4	4125
VRV72148	72	148	20	108	12	42	90	16	10	12	3/4	1-1/2	2	4	1-1/2	1	5225
VRV84166	84	166	23	120	12	42	102	18	10	12	1-1/4	1-1/2	2	6	1-1/2	1	9000
VRV96172	96	172	26	120	12	42	102	20	12	12	1-1/4	1-1/2	2-1/2	6	2	1-1/4	10575
VRV108172	108	172	29	114	14	47	96	22	12	14	1-1/4	1-1/2	3	8	2	1-1/4	14875
VRV120172	120	172	32	108	16	52	90	24	14	16	1-1/4	1-1/2	3	8	2	1-1/4	16600

RVS STD. ASME 150# HORIZONTAL RECIRCULATOR VESSELS with DUAL PUMP SUCTIONS

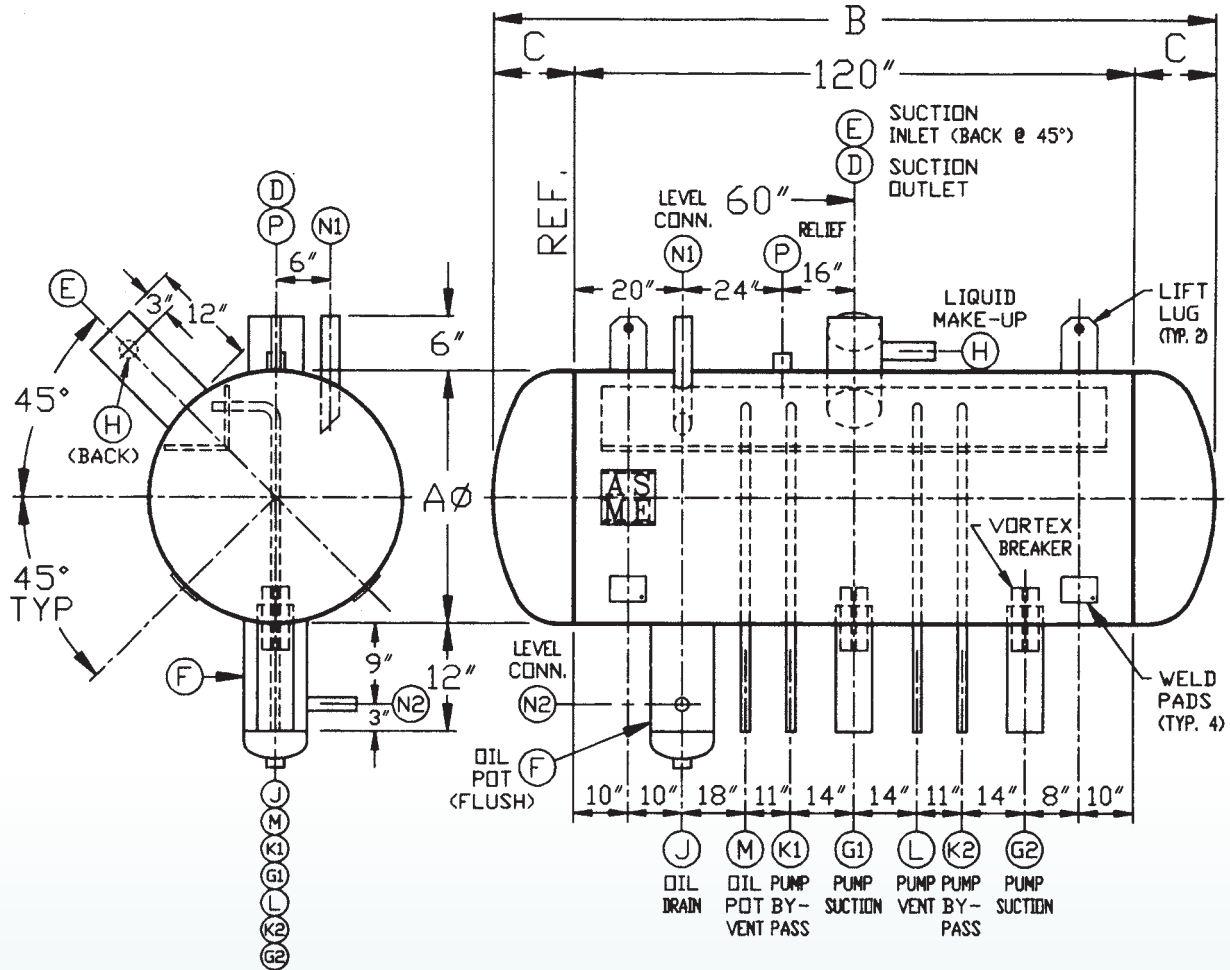

Model No.	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Weight lbs.
HRV24136	24	136	8-1/4	4	4	8	4	1	1	3/4	3/4	3/4	1-1/2	1/2	1250
HRV30139	30	139	9-1/2	5	5	10	4	1	1	3/4	3/4	3/4	1-1/2	1/2	1600
HRV36142	36	142	11	6	6	10	4	1	1	3/4	3/4	3/4	1-1/2	1/2	1975
HRV42145	42	145	12-1/2	6	6	10	4	1-1/4	1	3/4	3/4	3/4	1-1/2	1/2	2350
HRV48148	48	148	14	8	8	12	4	1-1/4	1	3/4	3/4	3/4	1-1/2	3/4	2775
HRV54151	54	151	15-1/2	8	8	12	6	1-1/2	1	3/4	3/4	3/4	1-1/2	3/4	4050
HRV60154	60	154	17	10	10	12	6	1-1/2	1	3/4	3/4	3/4	1-1/2	3/4	4100
HRV72160	72	160	20	10	12	12	6	2	1	3/4	3/4	3/4	1-1/2	1	5025
HRV84166	84	166	23	10	12	12	8	2	2	3/4	3/4	3/4	1-1/2	1	8075
HRV96172	96	172	26	12	14	12	8	2-1/2	2	1-1/4	3/4	3/4	1-1/2	1-1/4	9650
HRV108178	108	178	29	14	16	12	8	3	2	1-1/4	3/4	3/4	1-1/2	1-1/4	14000
HRV120184	120	184	32	16	18	12	8	3	2	1-1/4	3/4	3/4	1-1/2	1-1/4	16050

OIL POT and ACCESSORIES

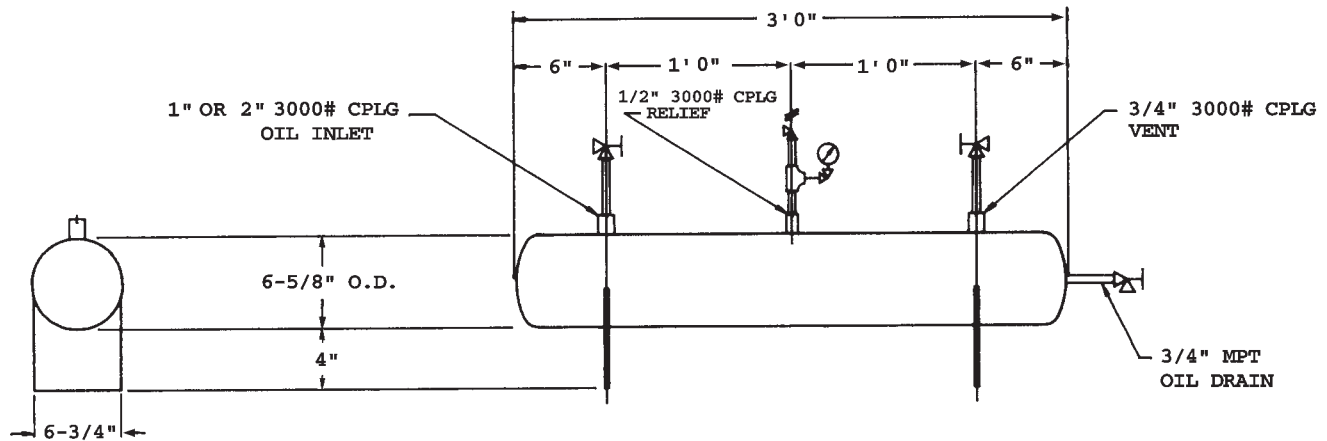

Part Number	Description
OP6	6-5/8" O.D. X 36" ASME 300# OIL POT
OP6A	6-5/8" O.D. X 36" ASME 300# OIL POT WITH ACCESSORIES INCLUDING: 1/2" RELIEF – 250#, 1" or 2" SW ANGLE VALVE, 3/4" SW ANGLE VALVE, 3/4" THD DRAIN VALVE.
OP6B	6-5/8" O.D. X 36" ASME 300# OIL POT WITH ACCESSORIES INCLUDING: 1/2" RELIEF – 250#, 1" or 2" SW ANGLE VALVE, 3/4" SW ANGLE VALVE, 3/4" THD DRAIN VALVE, 300# PRESSURE GAUGE & GAUGE VALVE.


Use "-1" suffix for 1" oil inlet.

Use "-2" suffix for 2" oil inlet.


Oil Pot is ASME "UM" Certified at 300 PSI.

Shipment F.O.B. Factory—from stock.


RVS STD. LIQUID LEVEL INDICATORS & LIQUID LEVEL INDICATOR COLUMNS

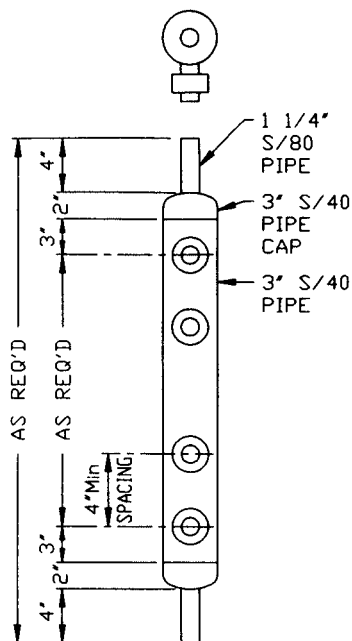



TYPE LEVEL INDICATOR
COLUMN FOR
H.P. RECEIVER

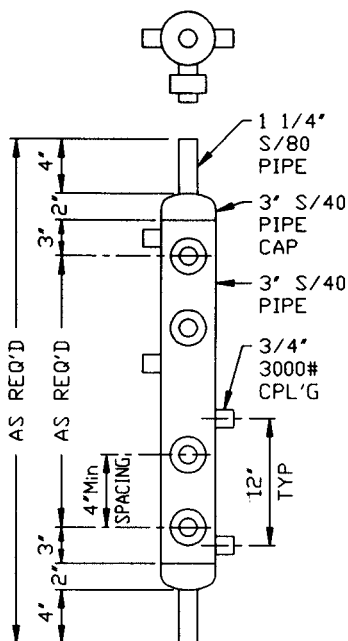

TYPE LEVEL INDICATOR
COLUMN FOR
VESSELS WITH FLOAT SWITCHES

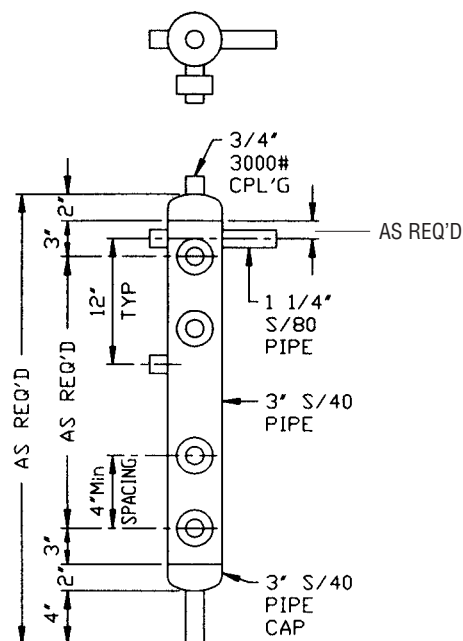

TYPE LEVEL INDICATOR
COLUMN FOR VESSELS
WITH VARI-LEVEL CONTROLS

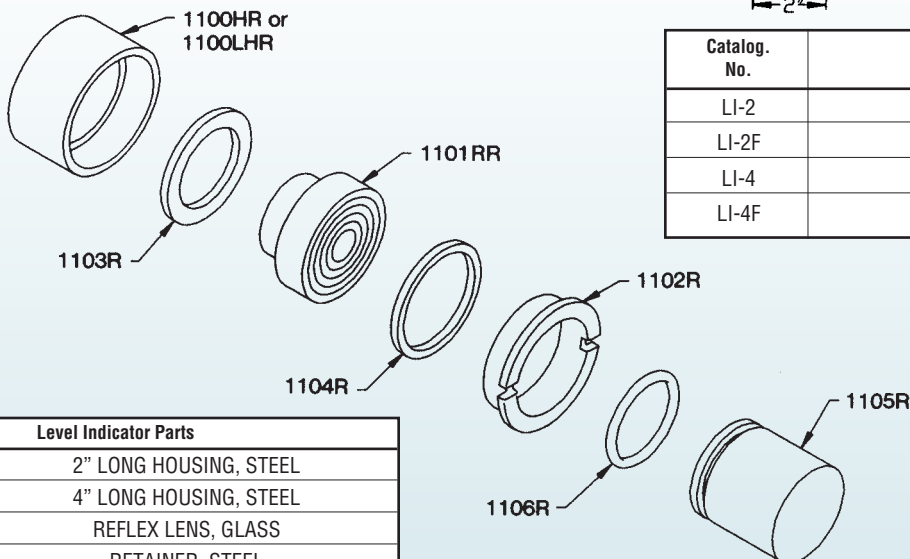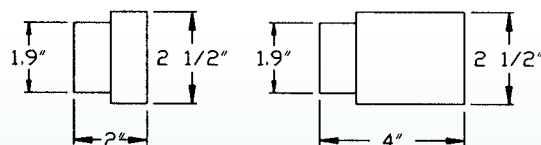

Catalog. No.	Level Indicator (Complete Assembly)
LI-2	2" LONG HOUSING
LI-2F	2" L.H. W/FROST SHIELD
LI-4	4" LONG HOUSING
LI-4F	4" L.H. W/FROST SHIELD

Level Indicator Parts	
1100HR	2" LONG HOUSING, STEEL
1100LHR	4" LONG HOUSING, STEEL
1101RR	REFLEX LENS, GLASS
1102R	RETAINER, STEEL
1103R	RUBBER GASKET, NEOPRENE
1104R	FIBER GASKET
1105R	FROST SHIELD, LUCITE
1106R	O-RING, BUNA-N



EVAPCO products are manufactured worldwide.



★ **World Headquarters/
Research and
Development Center**

■ **EVAPCO Facilities**

EVAPCO... Taking Quality and Service to a Higher Level.

World Headquarters Research/Development Center

EVAPCO, Inc.
P.O. Box 1300
Westminster, MD 21158 USA
Ph: 410-756-2600
Fax: 410-756-6450
E-mail: marketing@evapco.com

Asia/Pacific Headquarters

EVAPCO Asia, Ltd.
Suite D, 23rd Floor
Majesty Building
138 Pudong Ave.
Shanghai, China 2001120
P.R. China
Ph: (86) 21-5877-3980
Fax: (86) 21-5877-2928
E-mail: evapco@online.sh.cn

European Headquarters

EVAPCO Europe, N.V.
Heersterveldweg 19
Industriezone, Tongeren-Oost
3700 Tongeren, Belgium
Ph: (32) 12-395029
Fax: (32) 12-238527
E-mail: evapco.europe@evapco.be

EVAPCO Manufacturing Locations

Refrigeration Valves & Systems
1520 Crosswind Dr.
Bryan, TX 77808 USA
Ph: 979-778-0095
Fax: 979-778-0030
E-mail: rvs@rvscorp.com

EVAPCO East
5151 Allendale Lane
Taneytown, MD 21787 USA
Ph: 410-756-2600
Fax: 410-756-6450
E-mail: marketing@evapco.com

EVAPCO Midwest
1723 York Road
Greenup, IL 62428 USA
Ph: 217-923-3431
Fax: 217-923-3300
E-mail: evapcomw@rr1.net

EVAPCO West
1900 West Almond Avenue
Madera, CA 93637 USA
Ph: 559-673-2207
Fax: 559-673-2378
E-mail: contact@evapcowest.com

EVAPCO-Iowa
925 Quality Drive
Lake View, Iowa 51450 USA
Sales & Engineering
1234 Brady Blvd.
Owatonna, MN 55060
Ph: 507-446-8005
Fax: 507-446-8239
E-mail: evapcomn@evapcomn.com

EVAPCO Europe, N.V.
Heersterveldweg 19
Industriezone, Tongeren-Oost
3700 Tongeren, Belgium
Ph: (32) 12-395029
Fax: (32) 12-238527
E-mail: evapco.europe@evapco.be

EVAPCO Europe, s.r.l.
Via Ciro Menotti 10,
I-20017 Passirana di Rho
Milano, Italy
Ph: (39) 02-939-9041
Fax: (39) 02-935-00840
E-mail: evapcoeuropa@evapco.it

EVAPCO Europe, s.r.l.
I-23020 Piateda (Sondrio) - Italy
Via Dosso, 2

Air EVAPCO (Ltd.)
92 Asma Fahmi Street, ARD El-Golf
Heliopolis, Cairo, Egypt
Ph: (202) 290-7483
Fax: (202) 290-0892
E-mail: manzlawi@egyptonline.com

EVAPCO S.A. (Pty.) Ltd.
18 Quality Road
Isando 1600
Republic of South Africa
Ph: (27) 11-392-6630
Fax: (27) 11-392-6615
E-mail: evapco@icon.co.za

**Beijing Hezhong-EVAPCO Refrigeration
Equipment Co., Ltd.**
Yan Qi Industrial Development District
Huai Rou County
Beijing, P.R. China - Code 101407
Ph: (86) 10-6166-7238
Fax: (86) 10-6166-7395
E-mail: beijing@evapco.com

**Shanghai Hezhong-EVAPCO Refrigeration
Co., Ltd.**
855 Yang Tai Road
Bao Shan Area,
Shanghai, P.R. China - Code 201901
Ph: (86) 21-5877-3980
Fax: (86) 21-5877-2928
E-mail: evapco@online.sh.cn

Aqua-Cool Towers
34-42 Melbourne St.
P.O. Box 436
Riverstone, N.S.W. Australia 2765
Ph: (61) 29-627-3332
Fax: (61) 29-627-1715

European Sales Office

EVAPCO Europe GmbH
Bovert 22
D-40670 Meerbusch, Germany
Ph: (49) 2159-912367
Fax: (49) 2159-912368
E-mail: sturies@evapco.de