



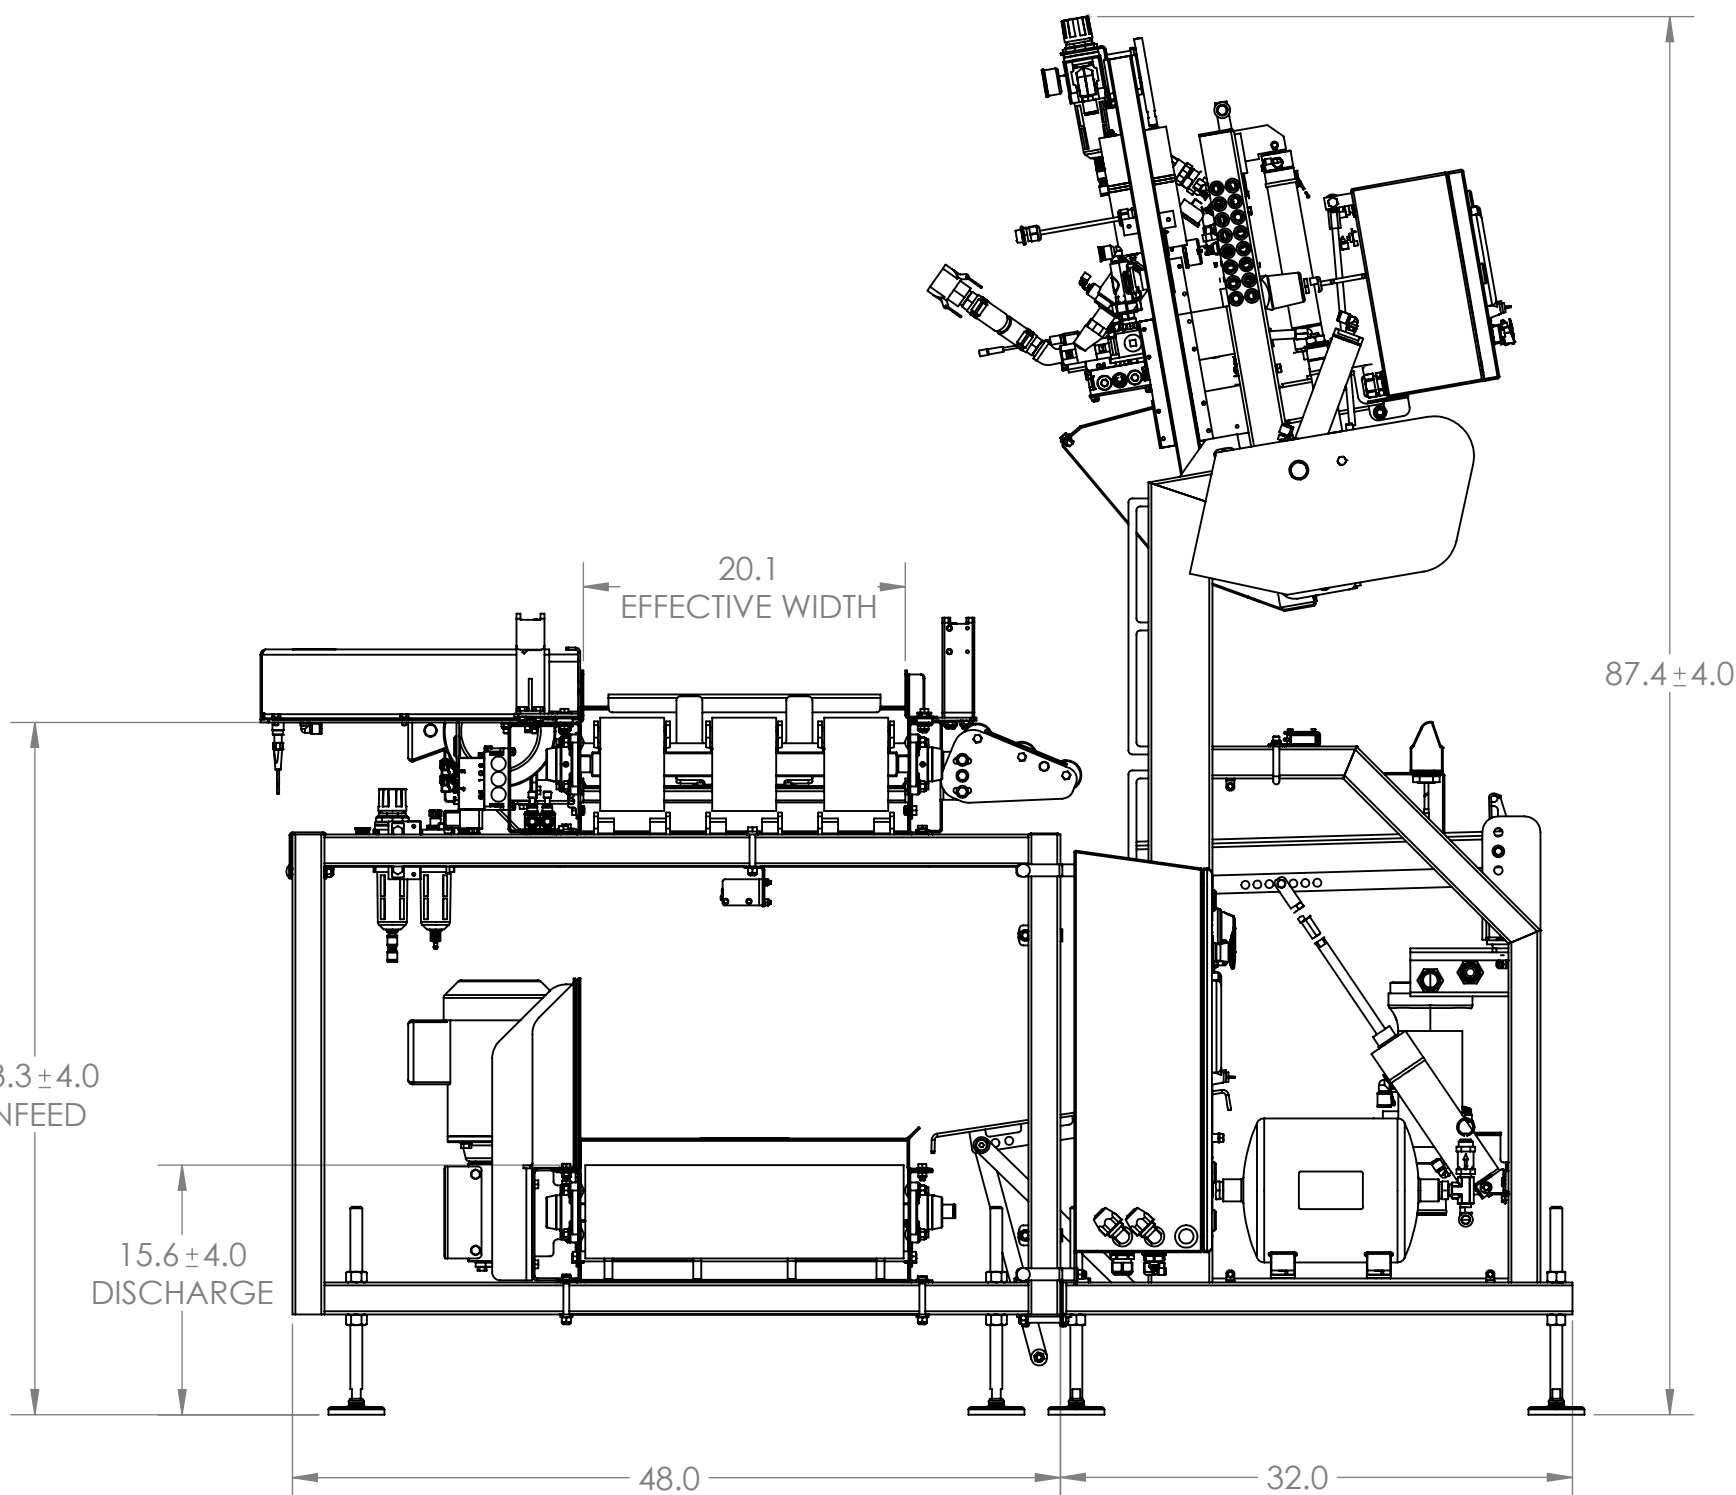


CONVEYOR UTILITY REQUIREMENTS:

ELECTRICAL POWER: 220/440 VAC, 3 PHASE, 60 HZ., 20/15 AMPS
COMPRESSED AIR: 80 PSI, 5 CFM

SEALING HEAD UTILITY REQUIREMENTS:

ELECTRICAL POWER: 120/220 VAC, SINGLE PHASE, 60 HZ., 20/10 AMPS
COMPRESSED AIR: 85 PSI, 5 CFM (PER MACHINE)
EACH SEALING HEAD REQUIRES INDIVIDUAL ELECTRICAL AND COMPRESSED AIR CONNECTIONS

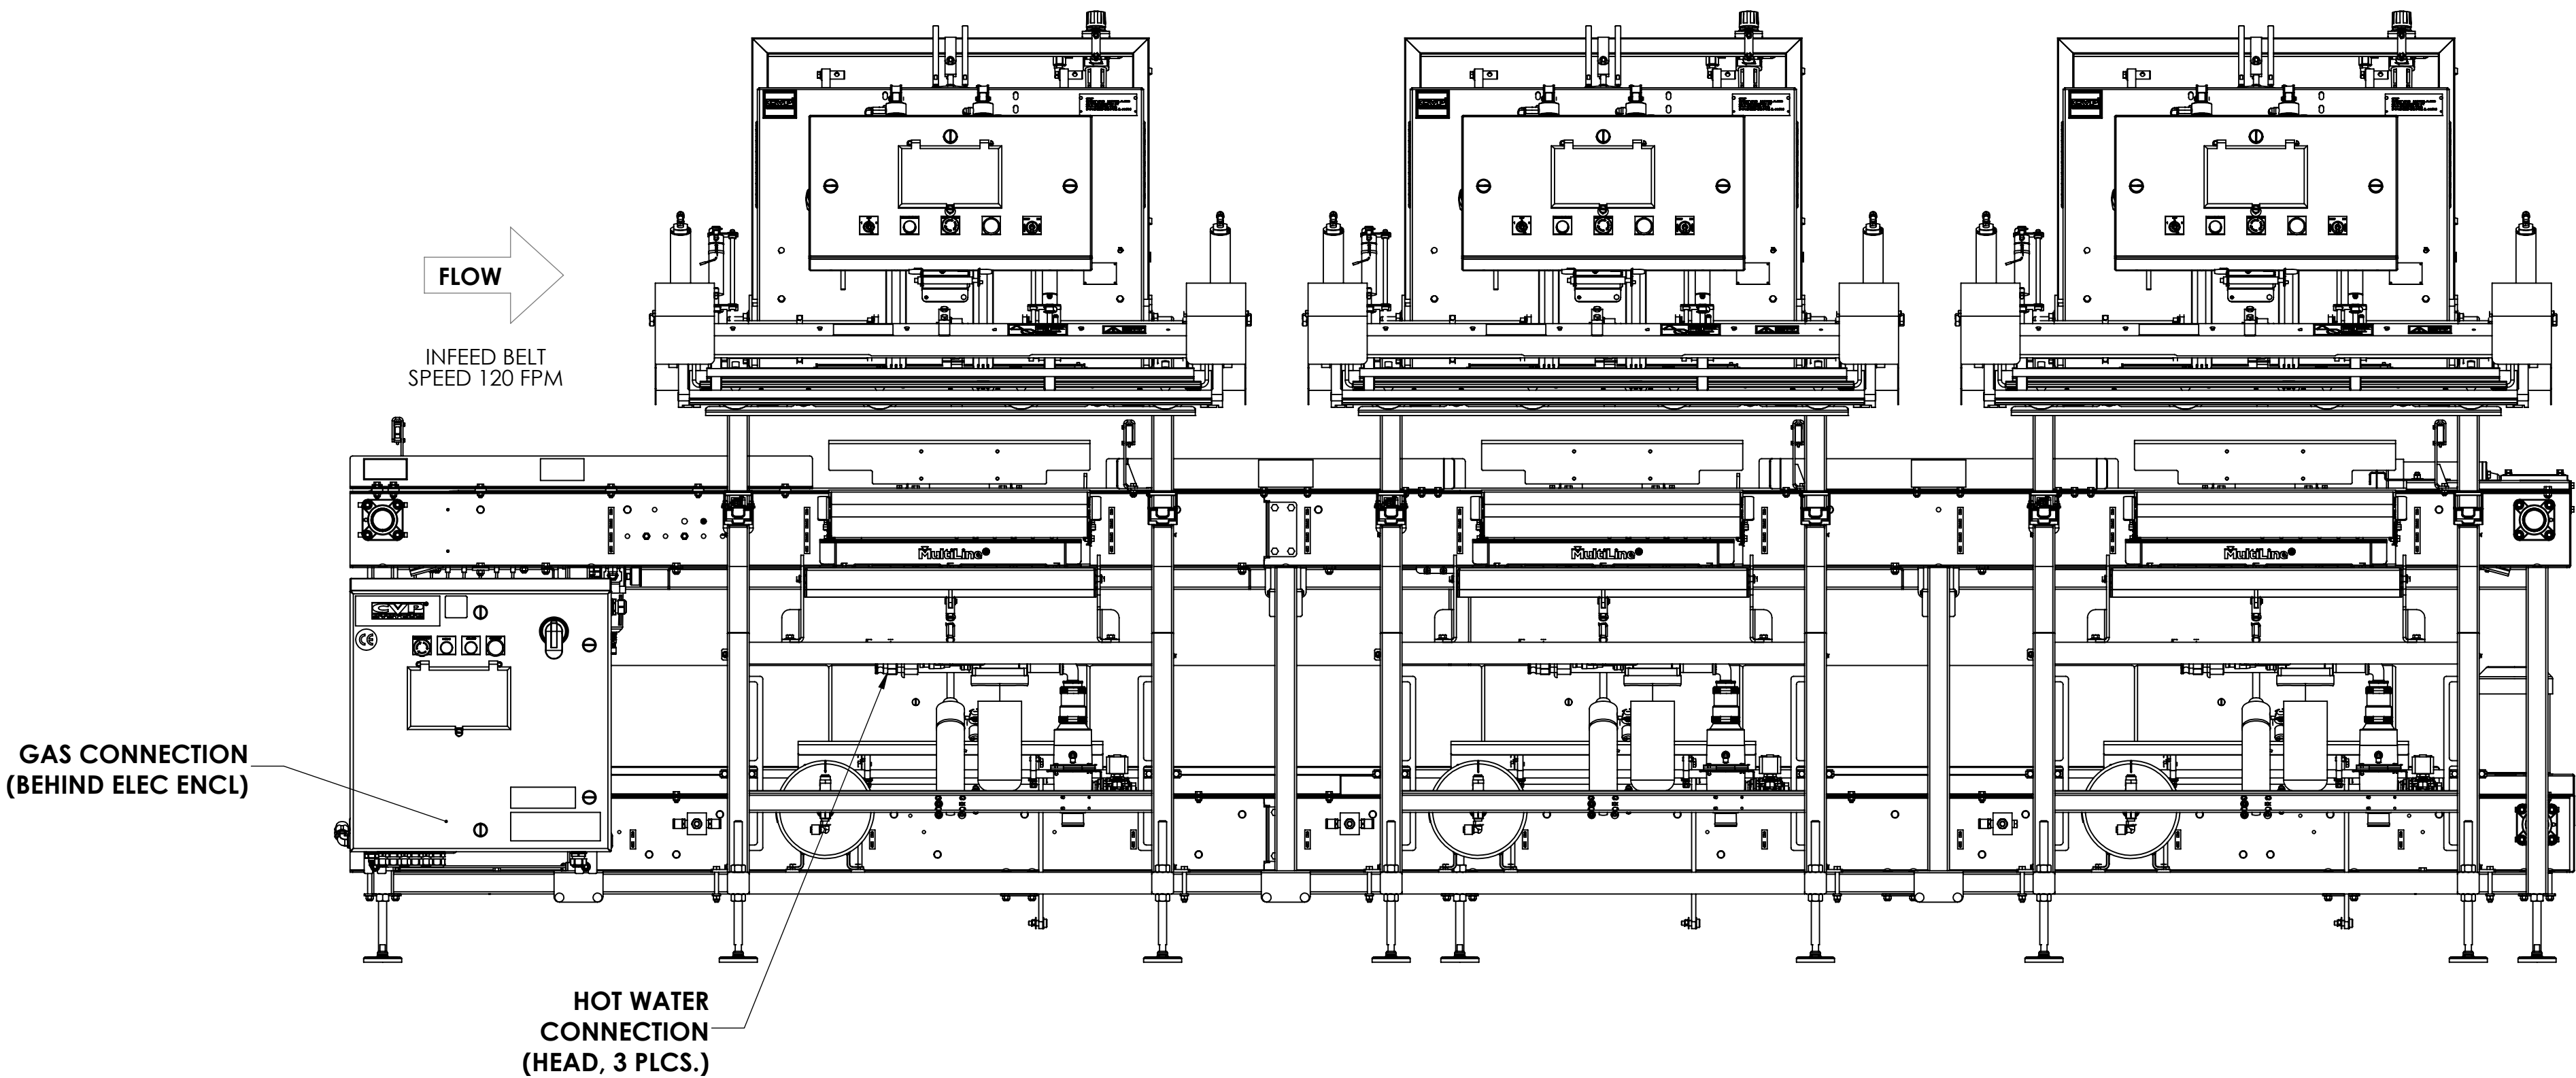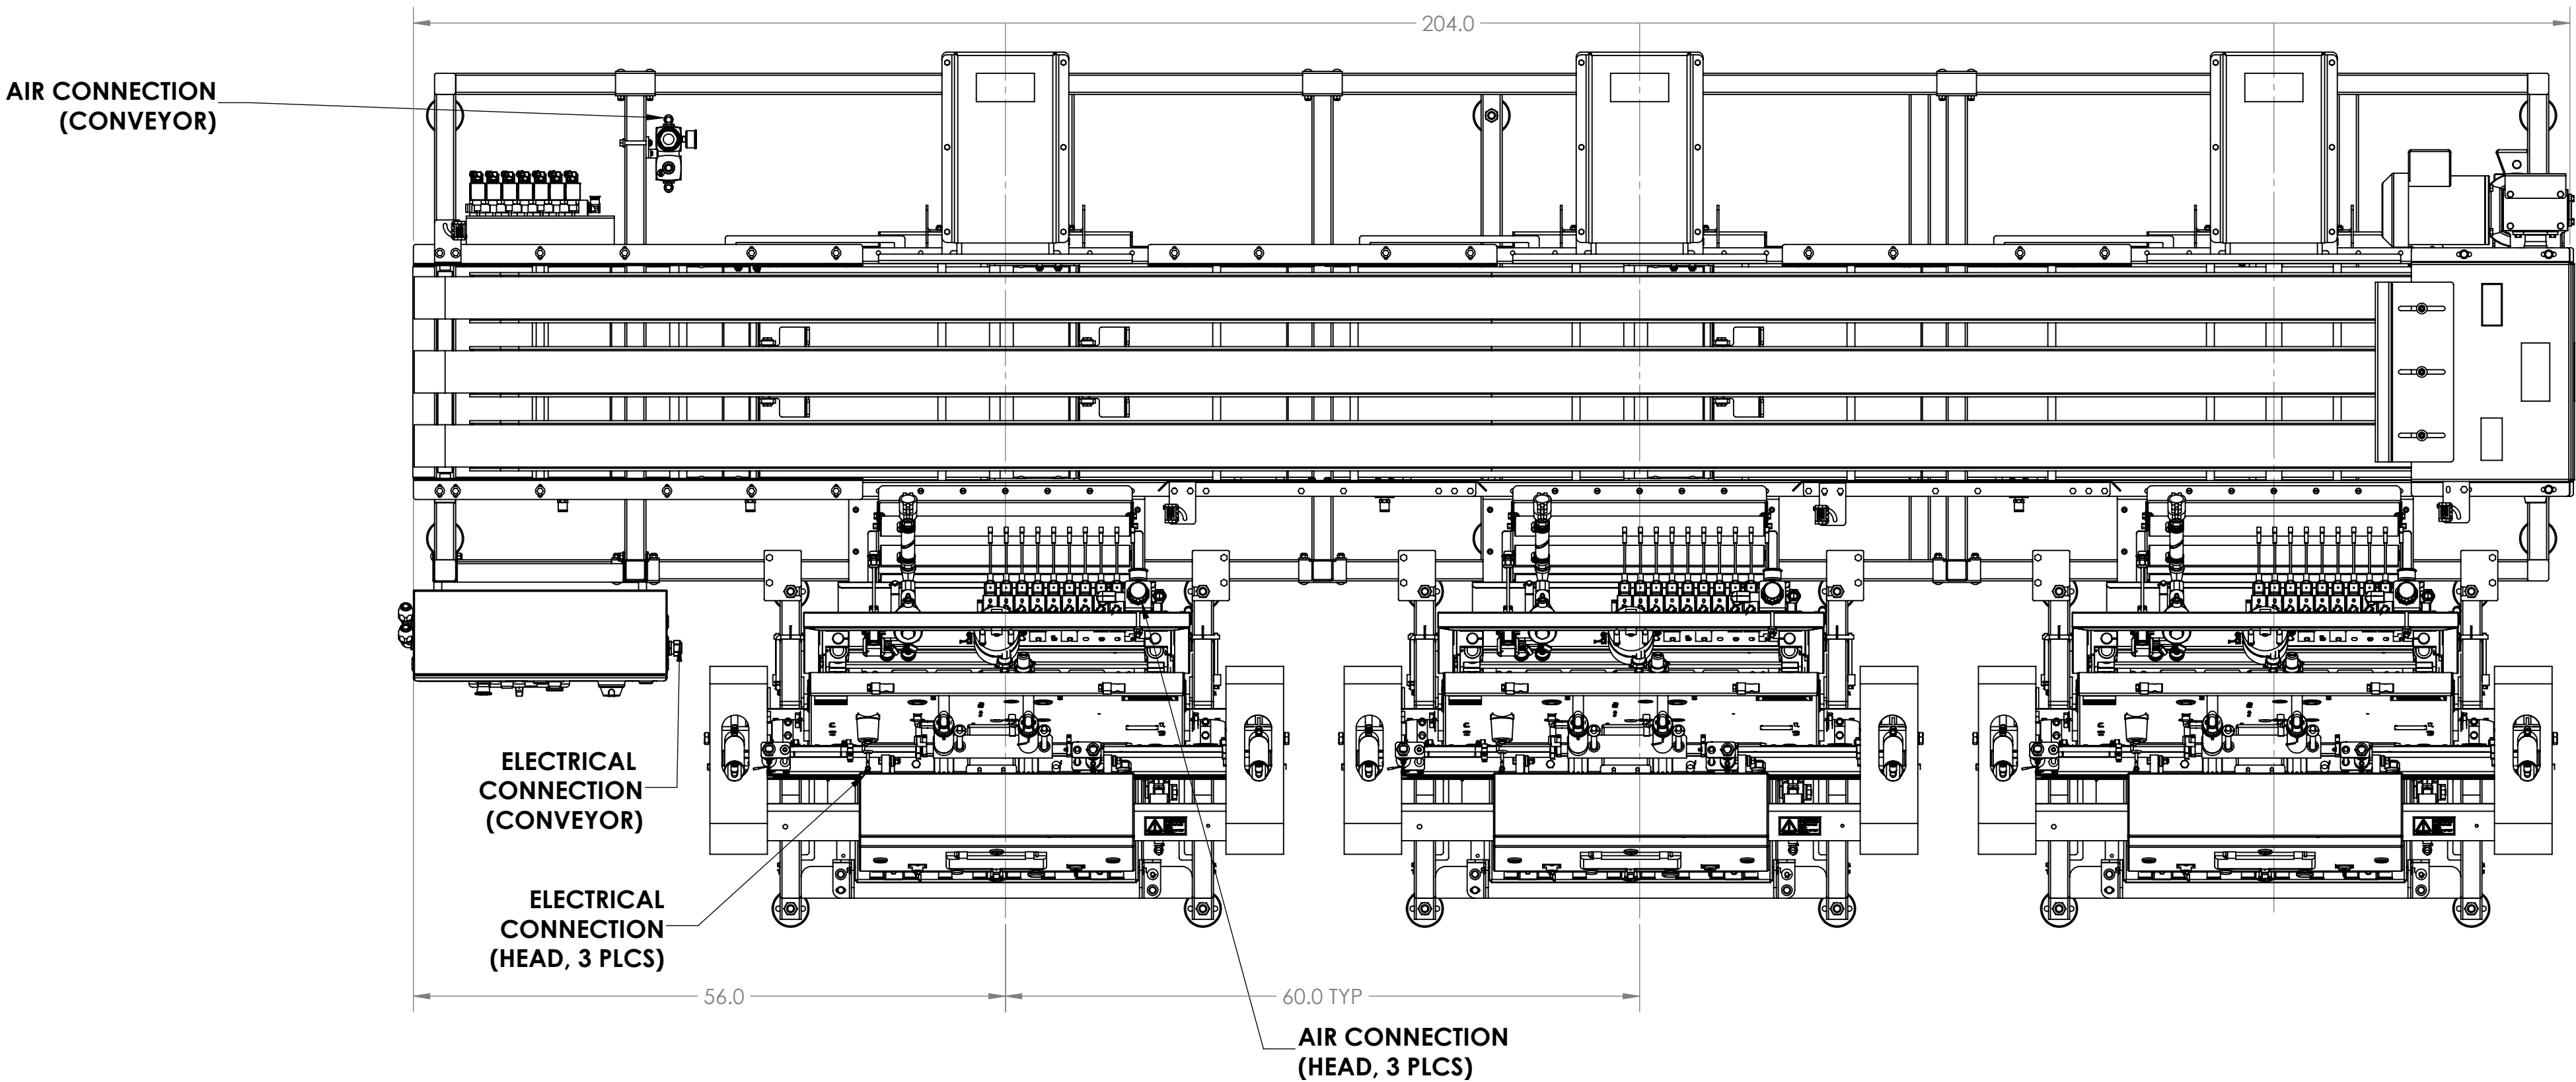

BOX SIZE LIMITS

LENGTH: 14.0 MIN/26.0 MAX
WIDTH: 13.5 MIN/20.0 MAX
HEIGHT: 5.0 MIN/13.0 MAX

BOXES WITH FLAPS MUST BE RUN WITH FLAPS FOLDED DOWN, BAG CUFFED OVER FLAPS.

BAG SIZE LIMITS

BAG STRETCHER: 23.0 WIDE MIN/41.0 MAX

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CVP SYSTEMS, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CVP SYSTEMS, INC. IS PROHIBITED.

MATERIAL				MULTILINE CNV DIMENSIONAL DWG A200	
FINISH	2518 DOWNERS GROVE, IL 60515 PHONE: (630) 852-1190 FAX: (630) 852-1386			DRAWING NO. D-CNV3-48-20-440-00-LR	REV
UNLESS OTHERWISE SPECIFIED: 1. BREAK ALL SHARP CORNERS 2. USE THE FOLLOWING TOLERANCES					
FRACT. 2PL DEC. 3PL DEC. ANGLES ±1/64 ±.01 ±.005 ±0°30'					
DRAWN C. BABCOCK	DATE 5/8/17	SCALE 1:12	SHEET 1 OF 1		