



Note: Slots should be machined completely through body tube: starting before the slot one one side and ending past the slot on the other side Depth is to dimesnsioned hidden line

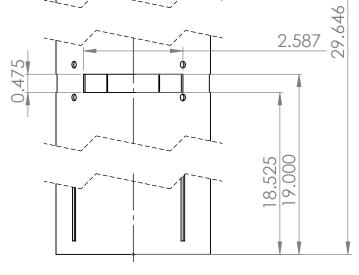



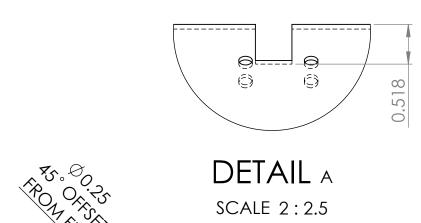

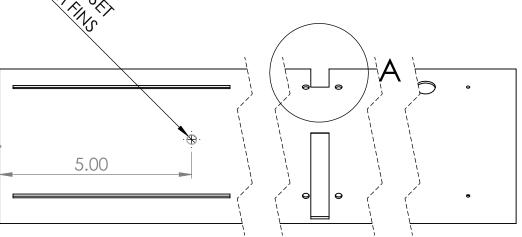

UNLESS OTHERWISE SPECIFIED		MATERIAL:		WUROCKETRY
DECIMALS	<u>ANGULAR</u>			
.X ± 0.02	± 0.5°	SS_Slots_Machining Drawing		
.XX ± 0.01 .XXX ± 0.005				QTY:
.^^^ ± 0.003		SCALE 1:2.5UNIT: IN	CHES PAGE	1 / 1