



Block Diagram




File: Block Diagram.kicad_sch

Power Budget




File: Power Tree.kicad_sch

Main MCU




File: Main MCU.kicad_sch

Debugger




File: Debugger.kicad_sch

Ethernet PHY




File: EthernetPHY.kicad_sch

LED Driver




File: LED_Driver_sch.kicad_sch

AC PWR ctrl & USB FS



File: AC Power control.kicad_sch

Power



File: Power.kicad_sch

Sheet: /
File: STM32 Microcontroller Board.kicad_sch

Title:


Size: A4


Date:

Rev:	
------	--

SIZE: A1	
KiCad E.D.A. 9.0.4	


Id: 1/9

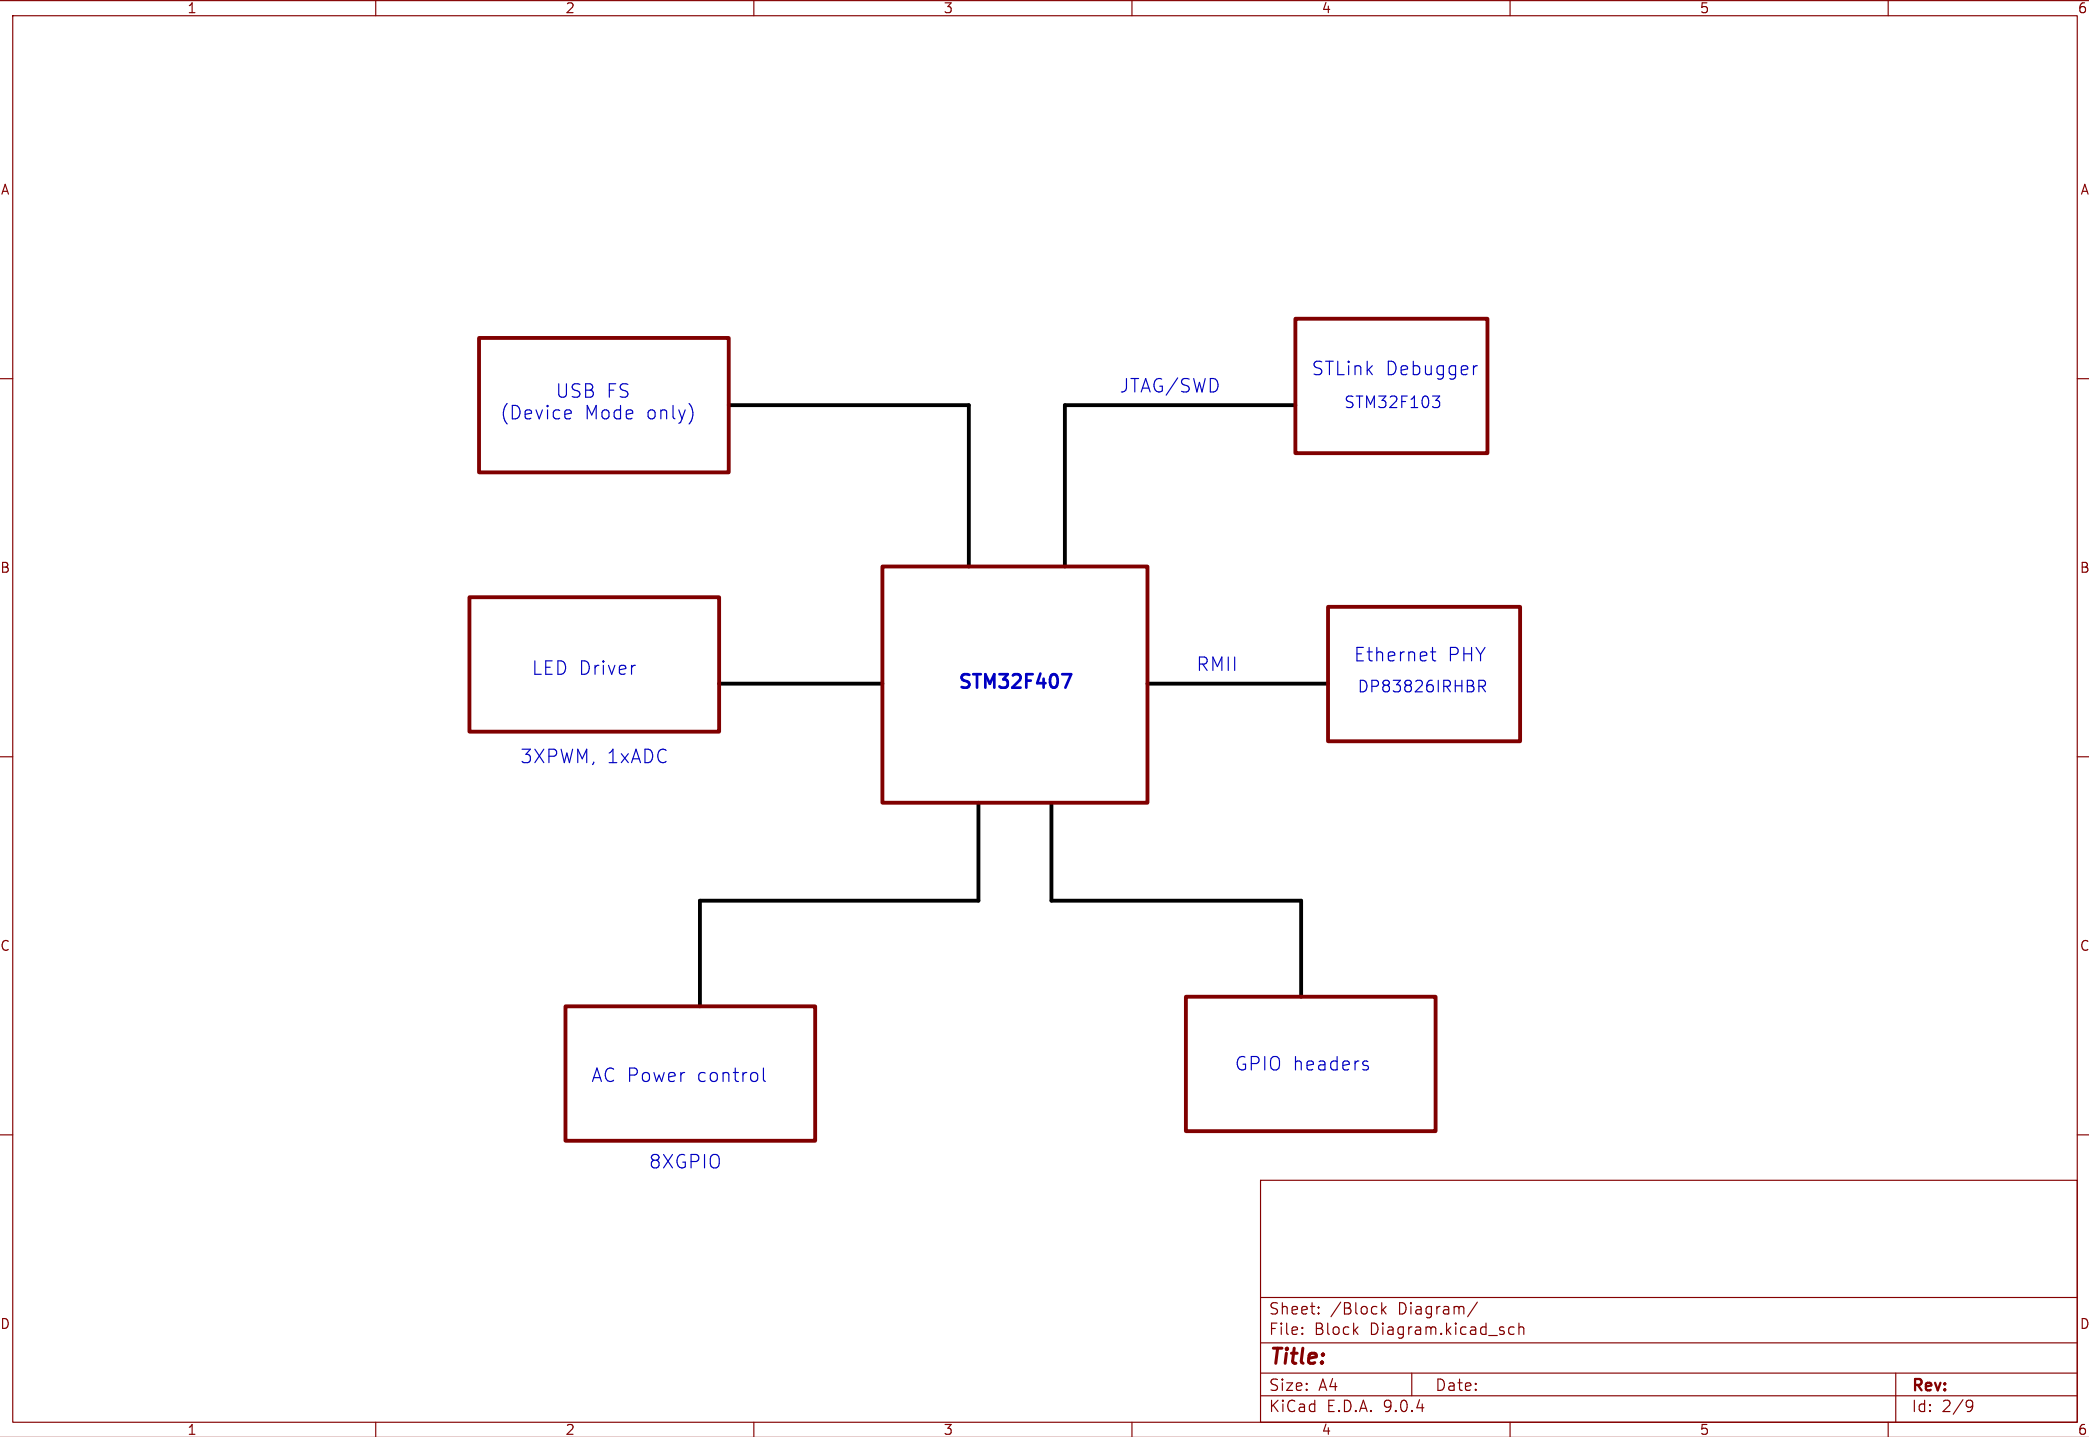

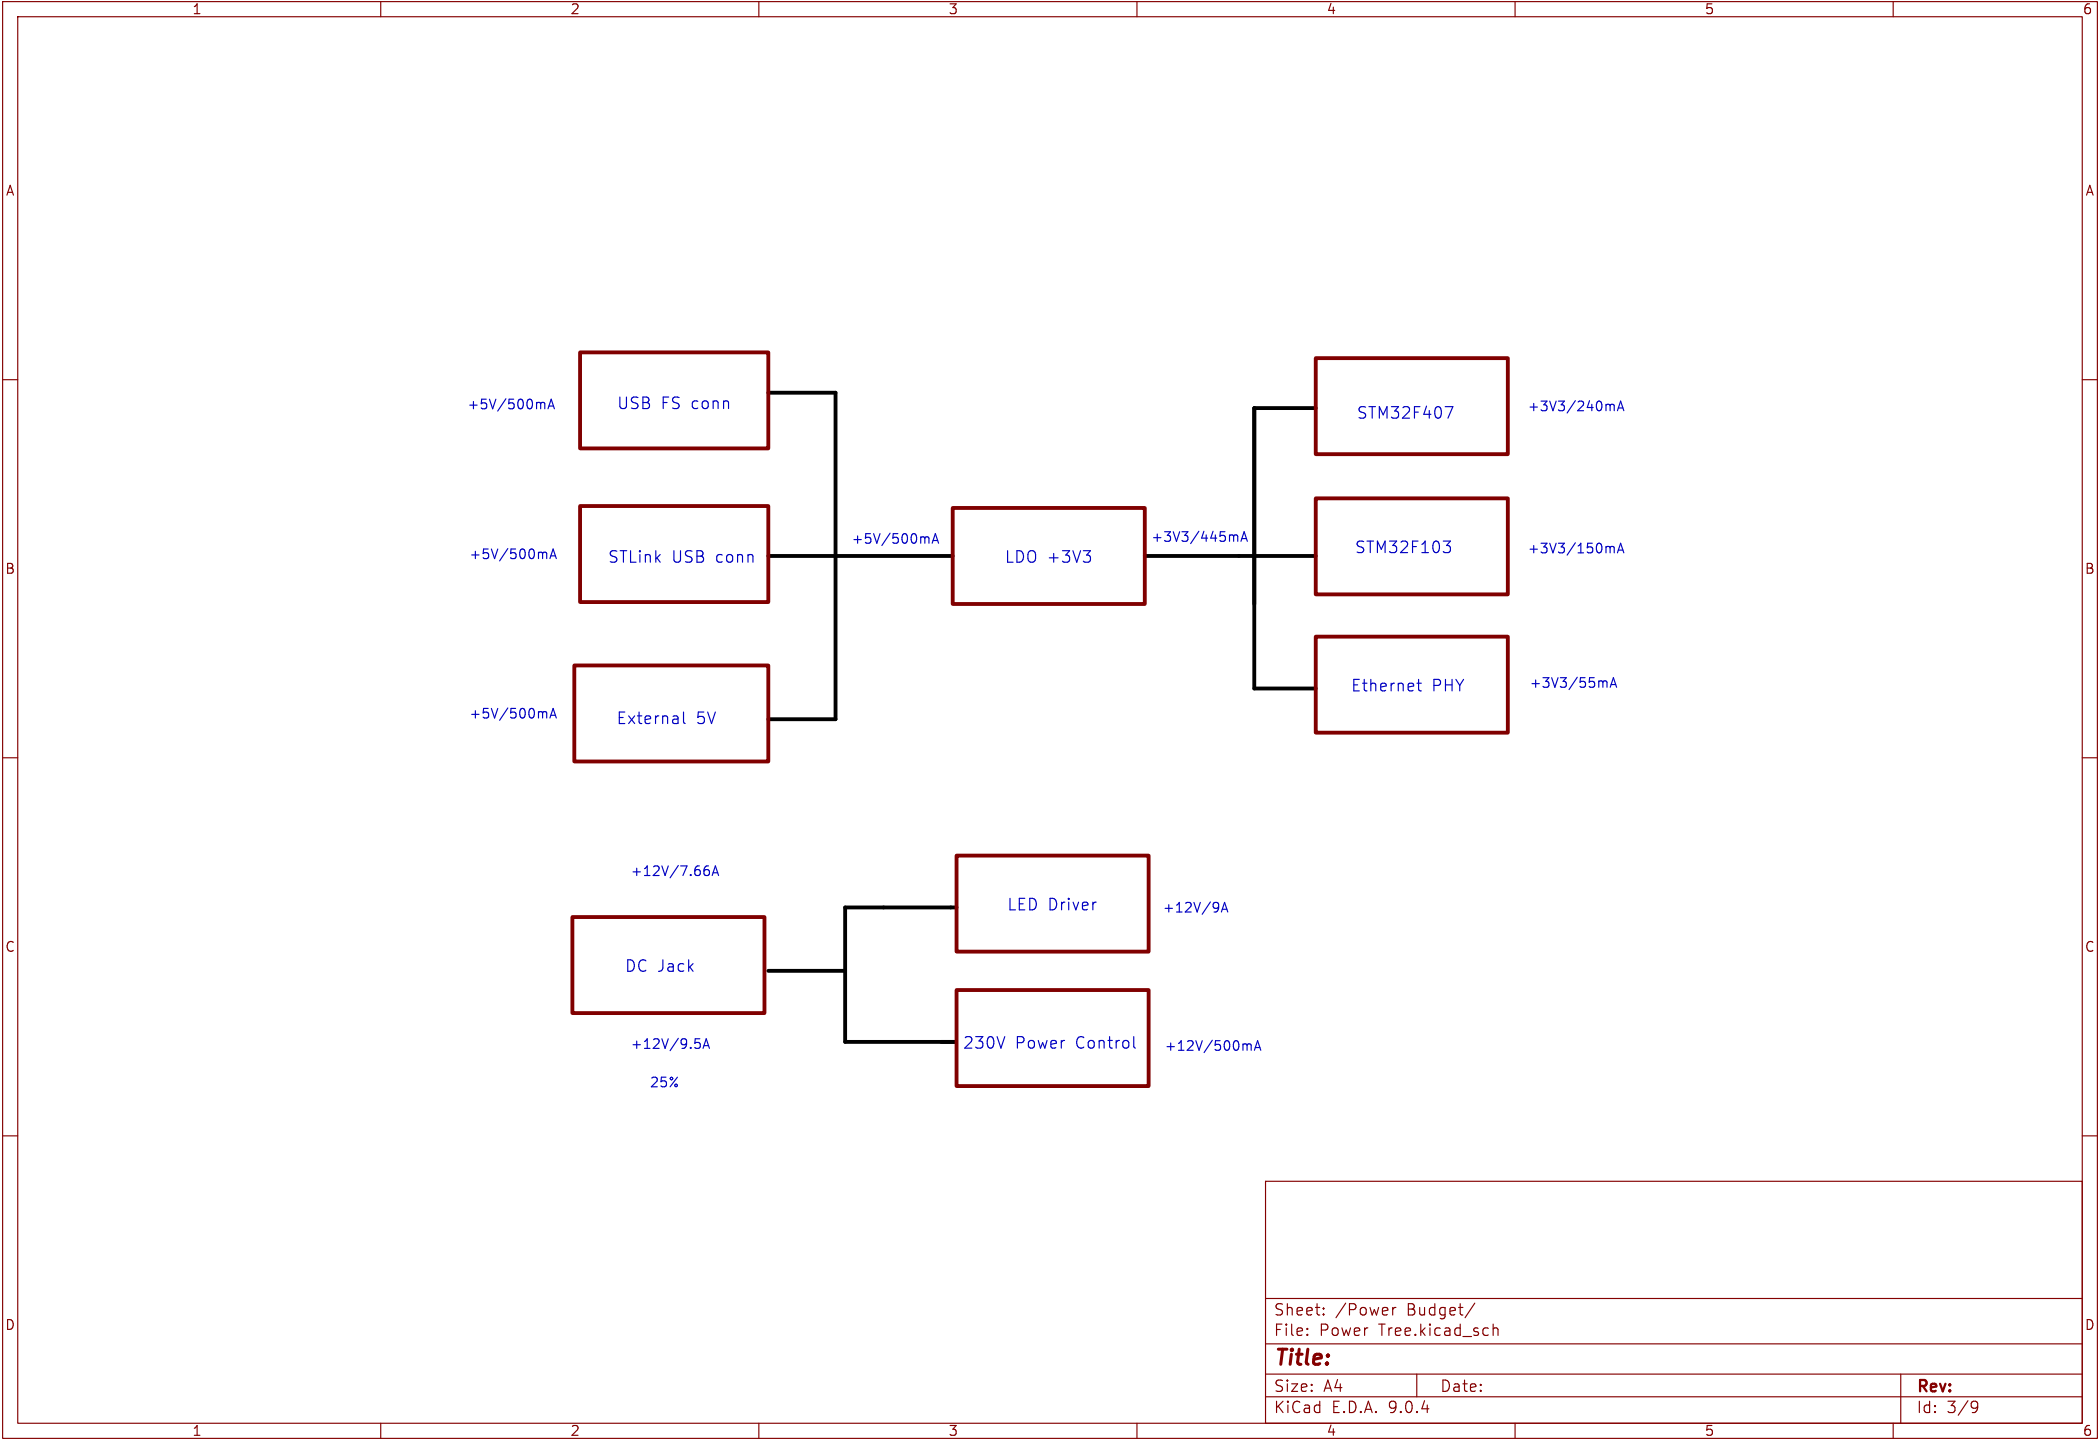


Sheet: /Power Budget/ File: Power Tree.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 9.0.4	Id: 3/9	



STM32F407 RESET & BOOT0

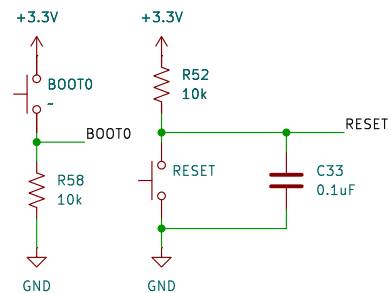



GPIO Extension

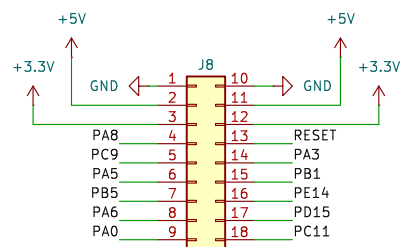


STM32F407 SWD

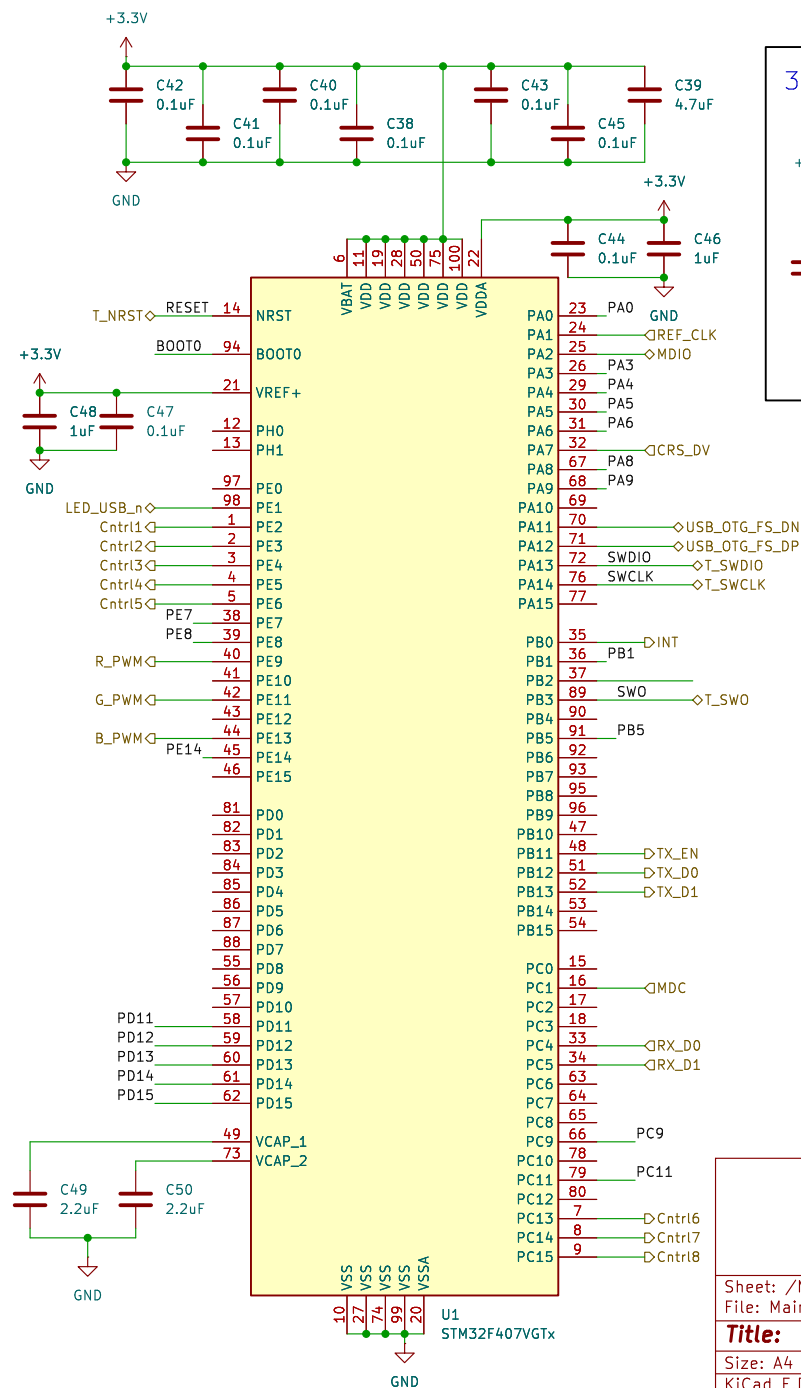

3V3 Power Supply

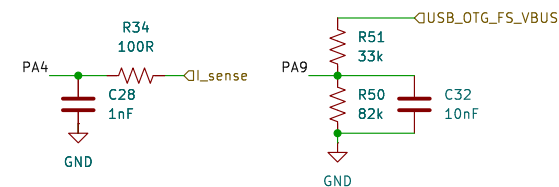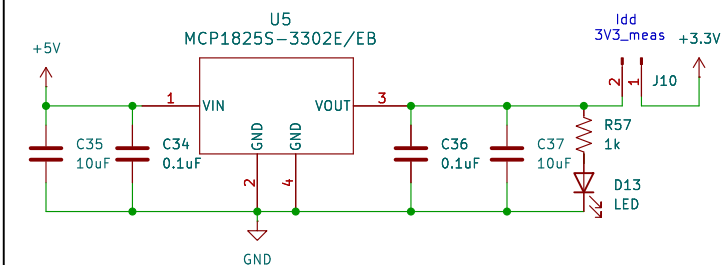

Peripherals

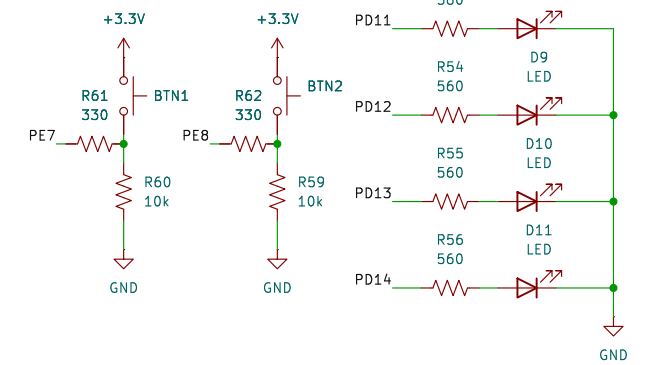

Sheet: /Main MCU/
File: Main MCU.kicad_sch

Title:

Size: A4


Date:

KiCad E.D.A. 9.0.4


Rev:

Id: 4/9


Debugger/Programmer

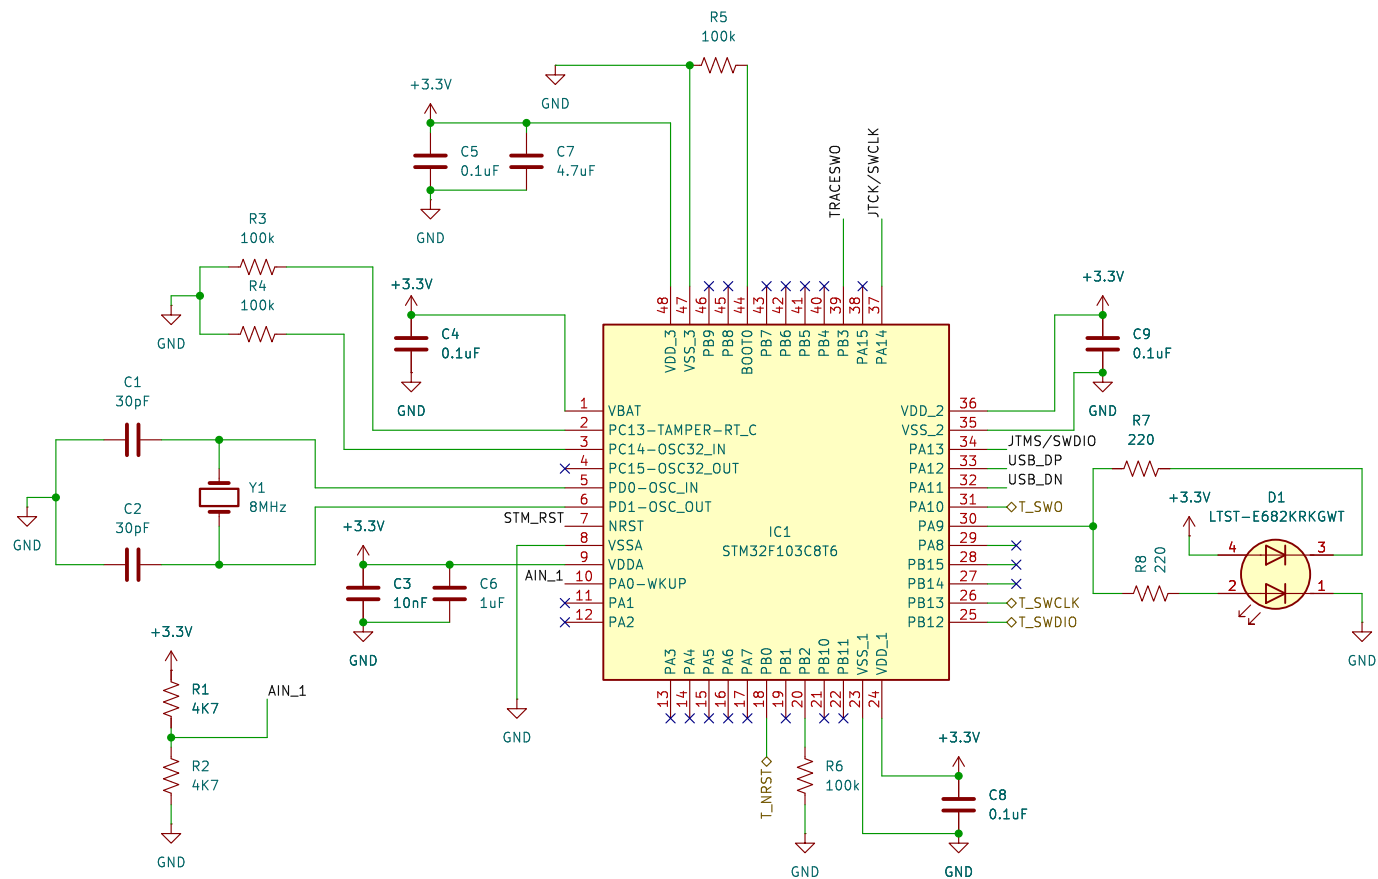


Reset STM32F103



USB2.0 for Program/Debug

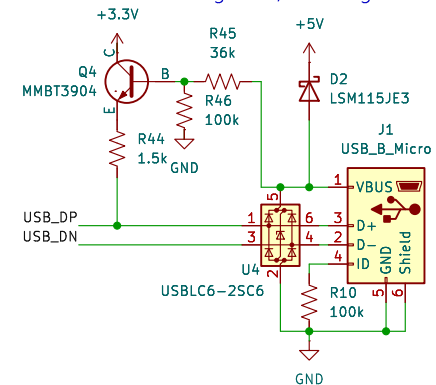

STM32F103 SWD



Sheet: /Debugger/
File: Debugger.kicad_sch


Title:

Size: A4
KiCad E.D.A. 9.0.4


Date:

Rev:
Id: 5/9


RJ45 Connector

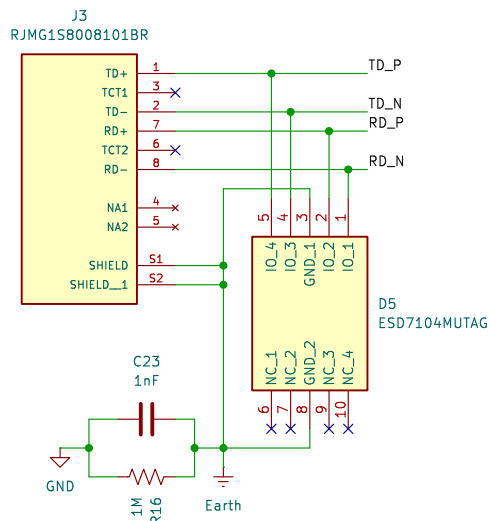

ETH Reset and Status LEDs

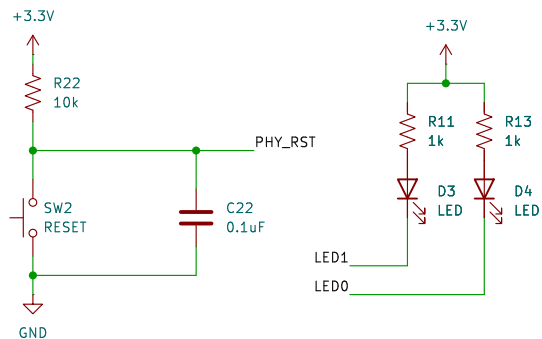

Ethernet PHY

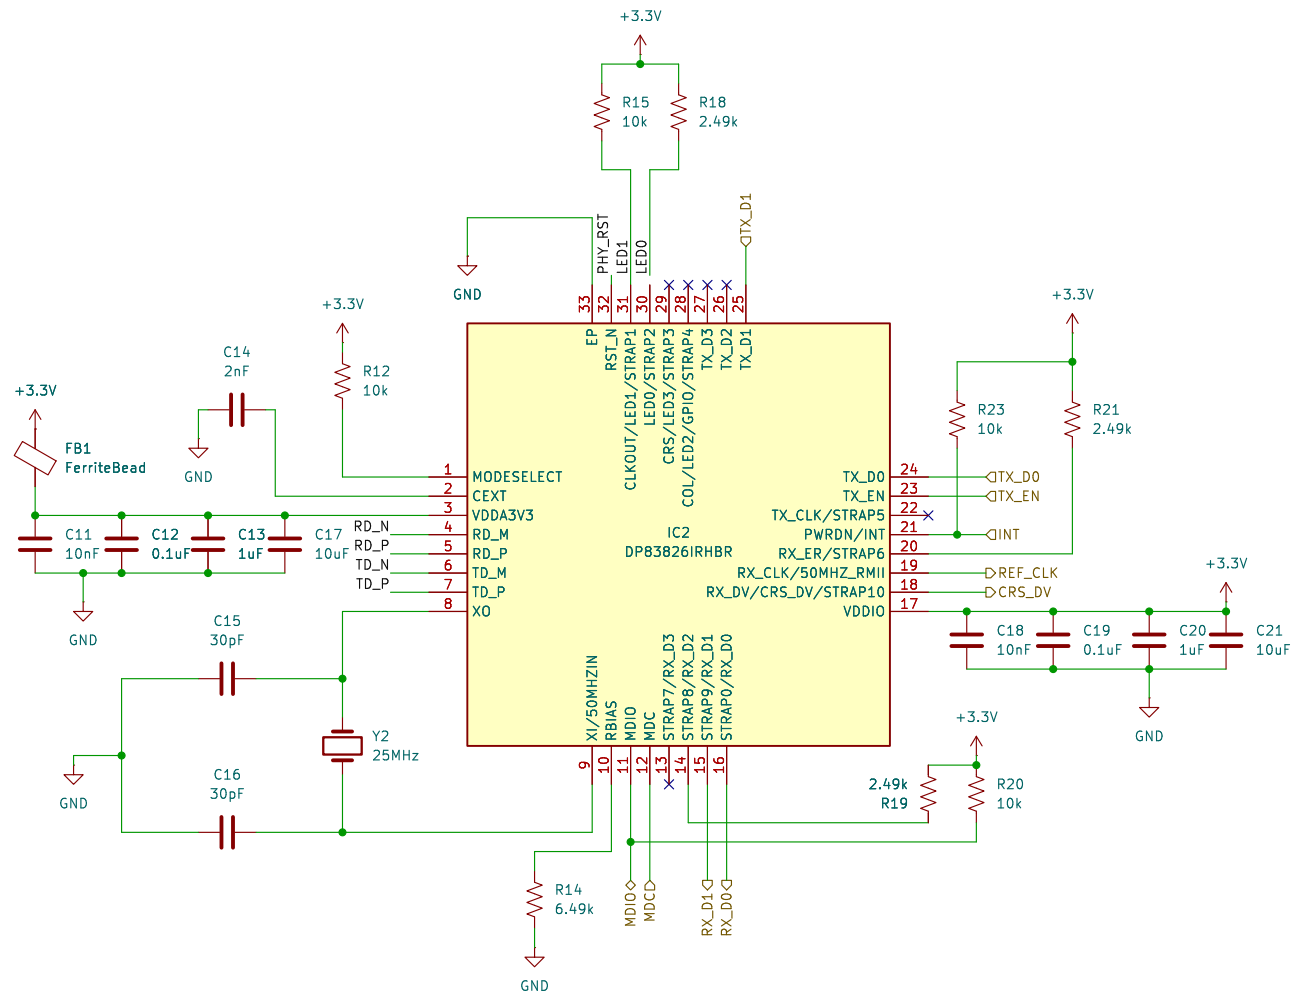

Sheet: /Ethernet PHY/
File: EthernetPHY.kicad_sch

Title:

Size: A4	Date:
----------	-------


KiCad E.D.A. 9.0.4

Date:


Rev:

Id: 6/9


12V RGB LED Conn

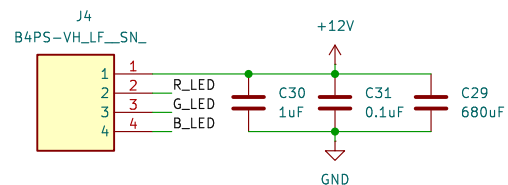

12V LED Power

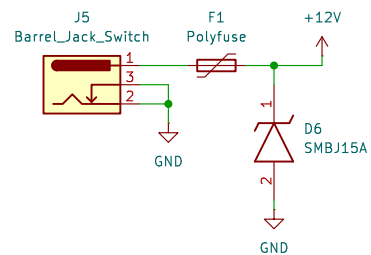

LED Driver with current sensing

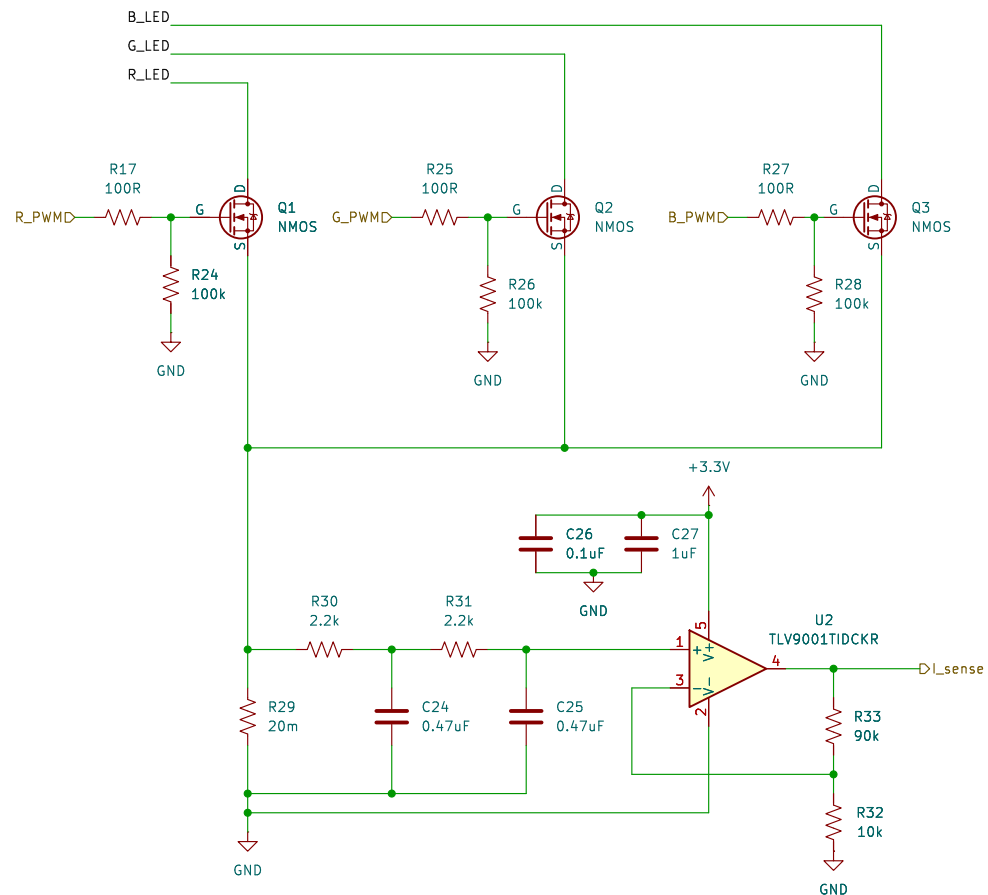

Sheet: /LED Driver/
File: LED_Driver_sch.kicad_sch

Title:


Size: A4
KiCad E.D.A. 9.0.4

Date:


Rev:

Id: 7/9

AC Power Control

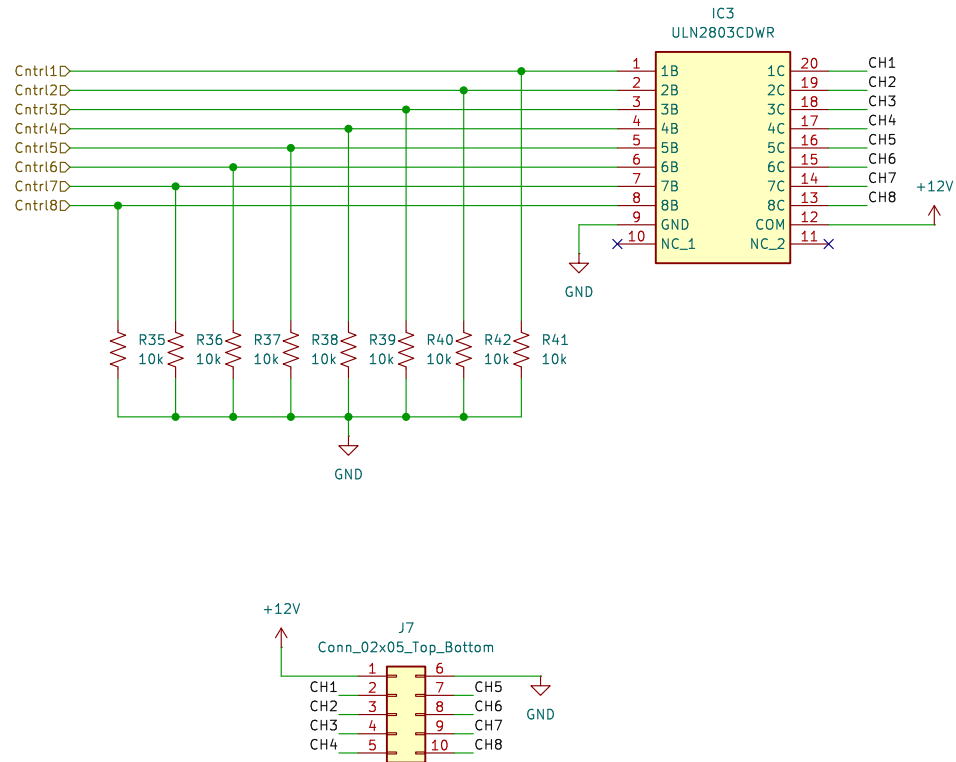

USB FS OTG (Device mode only)

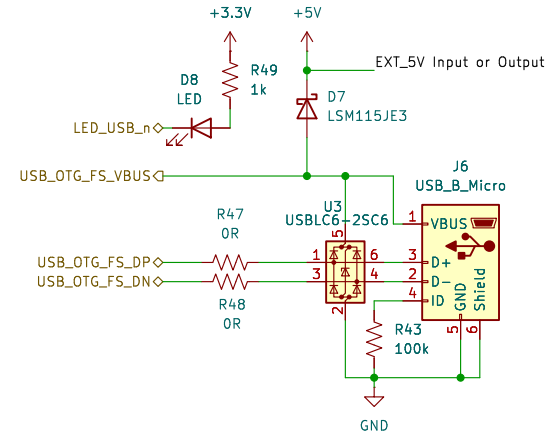

Sheet: /AC PWR ctrl & USB FS/
File: AC Power control.kicad_sch

Title:

Size: A4

Date:

KiCad E.D.A. 9.0.4

Rev:

Id: 8/9

