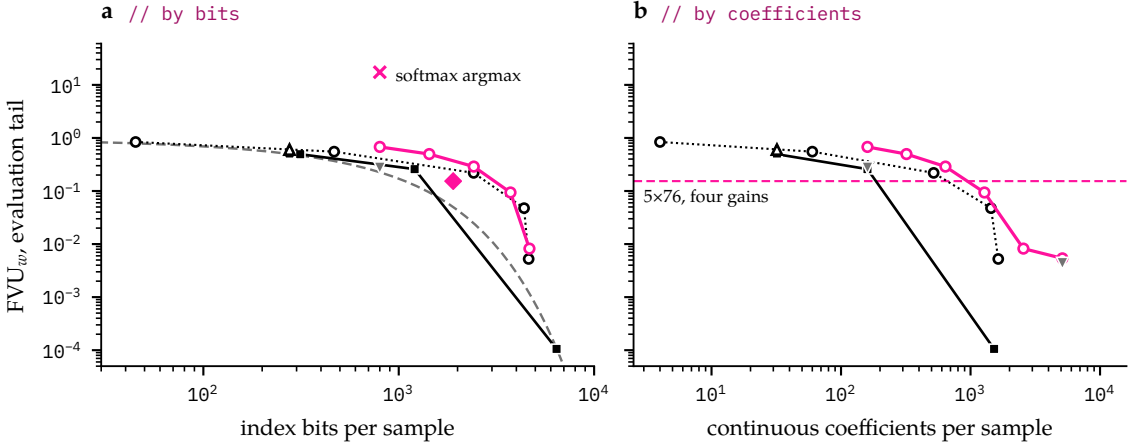
a // by bits
b // by coefficients
softmax argmax
5×76, four gains
FVU$_w$, evaluation tail
index bits per sample
continuous coefficients per sample
Gaussian reference
L1 SAE
softmax, top ν per head
straight-through, 5×76
TopK SAE
bilinear SAE
single-layer variants