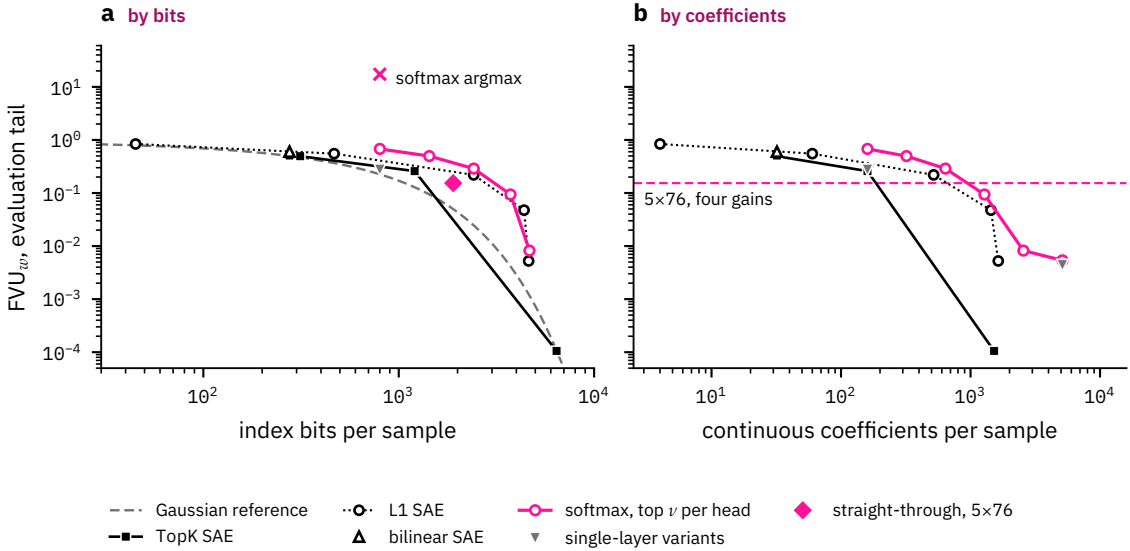
a by bits
b by coefficients
softmax argmax
5×76, four gains
FVU$_w$, evaluation tail
index bits per sample
continuous coefficients per sample
Gaussian reference
TopK SAE
L1 SAE
bilinear SAE
softmax, top ν per head
single-layer variants
straight-through, 5×76