


- ☐ installation profile according to VDE 43 880
- ☐ 6 switchable time ranges
- ☐ 18-264 V AC/DC zoomvoltage
- ☐ approvals:  TA 501 

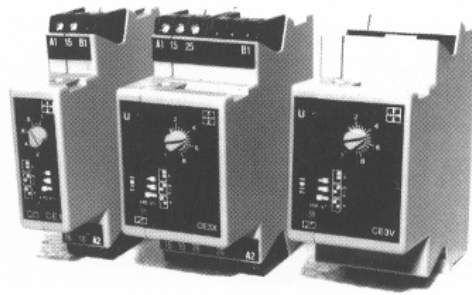

Technical Data:

Supply voltages:

Continuously variable voltage: 24 to 240 V AC/DC

Acceptable voltage variation 0.75 to 1.1 U_N

Frequency range 45-65 Hz

Duty cycle 100% IEC class 1c

Environmental conditions:

Permissible ambient temperature -25°C to +55°C

HVF climatic resistance to DIN 40040

Accuracy:

Repetition accuracy under constant condition

(as % of full range) $\leq 1\%$

Accuracy of adjustment $\leq 5\%$

Effect of temperature $\leq 0.1\%/^{\circ}\text{C}$

Reset time approx. 100 ms

Mechanische Daten/Vorschriften:

Enclosure in self-extinguishing plastic. Type of protection IP 40

To meet the ÖVE-standards for household - applications require a 0.47 μF capacitor.

Type of connections:

Type X: Terminals up to 4 mm² with protection against accidental contact.

Type V: 11-pin plug-in socket.

Dimensions and standards:

1X: 78,6 x 17,5 x 66 mm (h x b x d)

3X: 78,6 x 35 x 66 mm (h x b x d)

3V: 78,6 x 35 x 76 mm (h x b x d)

X: Mounting on DIN rails to DIN 46277/3

(European standard EN 50 0222)

Connection via terminals up to 4 mm² with protection against accidental contact. Type of protection IP20

Protection against contact to VDE 0106 and VBG 4

Terminal arrangement and connection markings to DIN 46 199

V: Mounting and connection via 11-pin screw or soldered plug. Fixing via retaining clip BU 351. Pin arrangement and connection markings to IEC 67-1-18a

Output stage:

1X: 1 changeover

3X, 3V: 2 changeover

Max. switching voltage: 250 VAC/DC

Continuous current: max. 8 A

Switching capacity: 230 V AC $\cos\phi$ 1 1500 VA

Contact life: 230 VAC 4 A resistive approx 2 · 10⁶ switching operations

Mechanical life: approx 20 · 10⁶ switching operations

E on-delay

Function diagram:



Description of function:


When the input voltage U is applied the set time t begins to run. When time t has elapsed, the output relay comes into operation, and stays on, until the input voltage U is removed from the unit.

If the input voltage U is removed from the unit before time t has elapsed, the time already elapsed is cancelled and re-starts from zero on the next cycle.


Selection of time ranges:

time range:	1 sec	10 sec	1 min	10 min	1 h	10 h
switch setting:						

Front view:

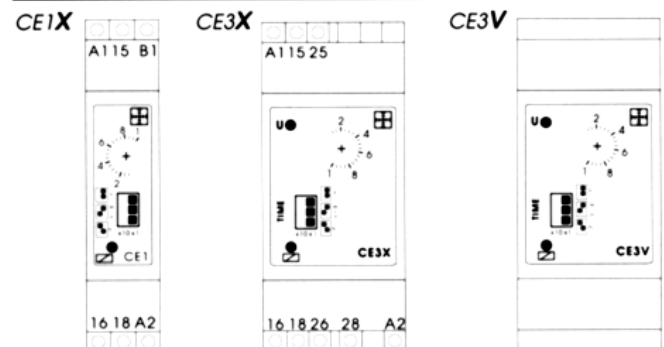

Connection:

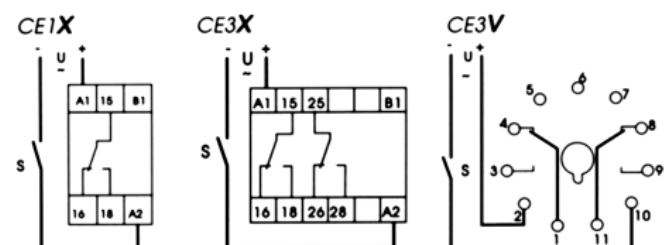

Types:

CE1X _____
CE3X _____ CE3V _____

Accessories:

Mounting plate MP
Dip-switch cover DA3

Plug-in base TVE 11
Plug-in base TVE 12