
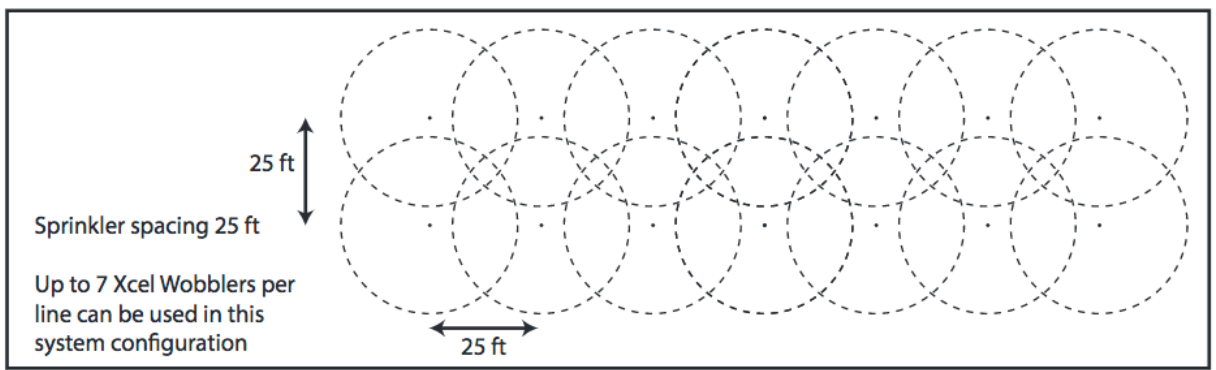

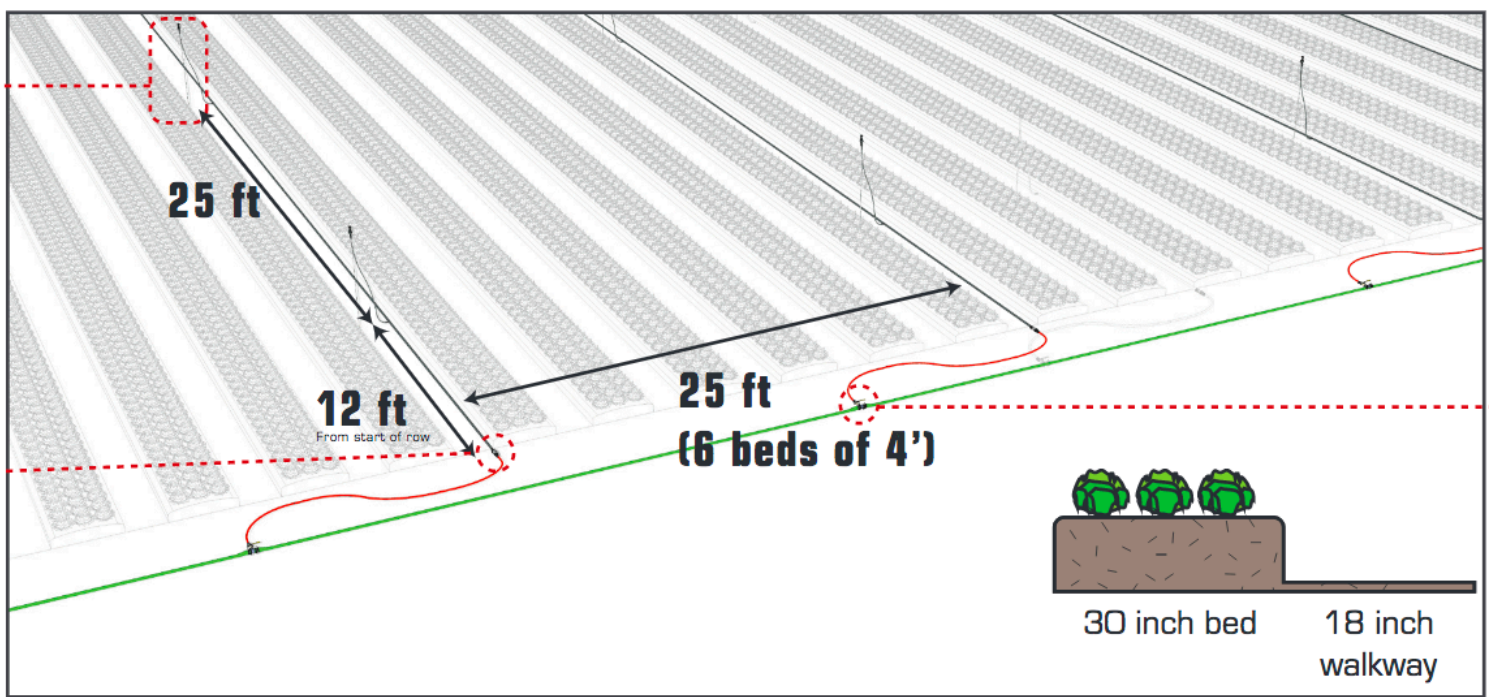
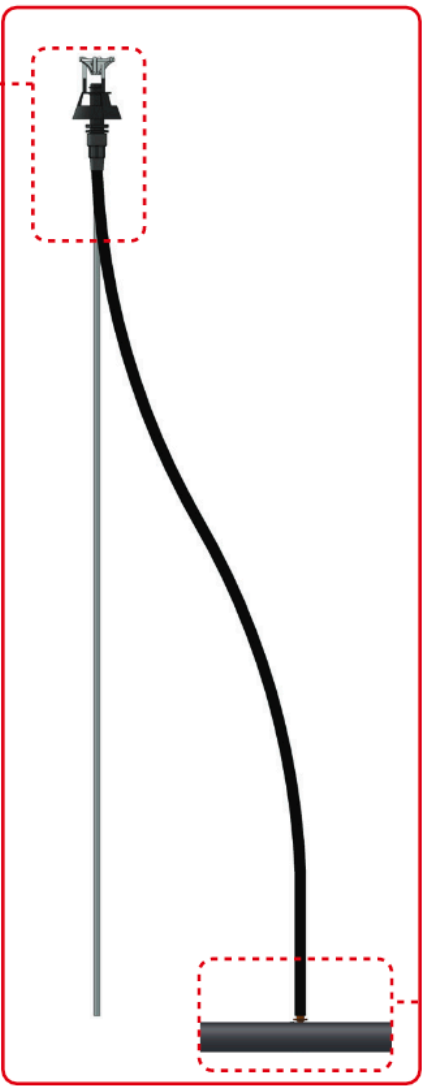
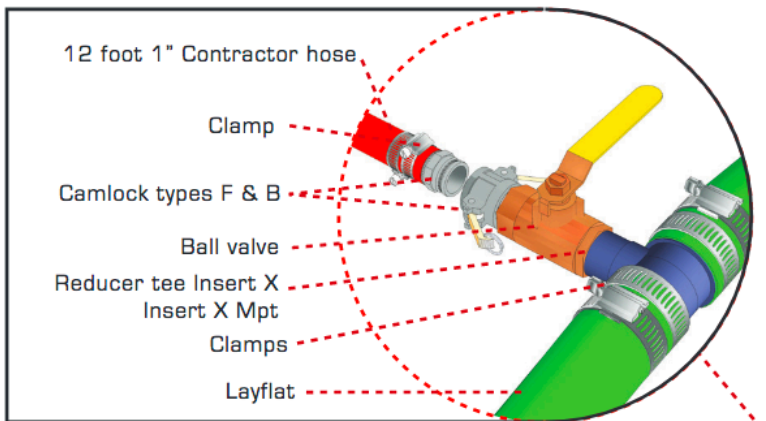


Market Garden irrigation set-up as described by JM Fortier organic grower

Senninger 1/2" Xcel-Wobbler Kit

Equipped with a 4' polyethylene tube and a galvanized steel rod, it can be installed and moved promptly since it can be attached manually or with a hammer to the ground. The height of the jet may vary between 2.5 to 5.5 ft (0.8 to 1.7 m) depending on the dimension of the nozzle and the presure. The minimum recomended height for the risers is 1.5 ft (0.46 m).

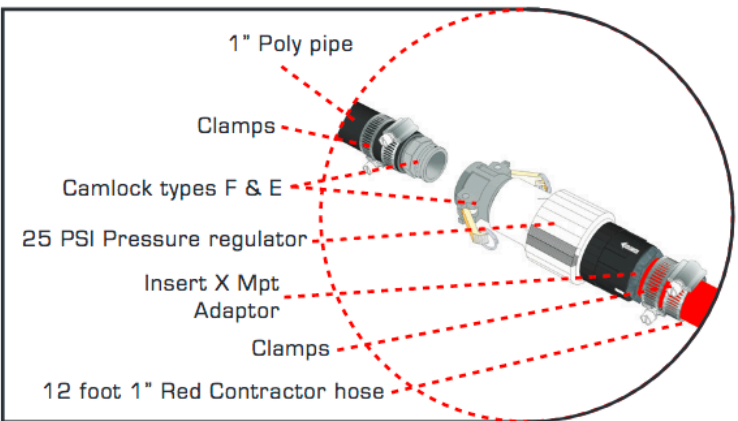

Flow rate	Pressure	Trajectory angles	Spacing
1.68 GPM Green nozzle	25 PSI (1.72 bar)	Mid angle (White deflector)	25' x 25' (7.62 m x 7.62 m)



450.454.3961
1.800.667.6279
DUBOISag.com






Market Garden irrigation set-up as described by JM Fortier organic grower

Fast-N-Fast Dan Sprinklers Kit

Valued by several vegetable gardeners, the complete Fast-N-Fast DAN sprinklers kit is perfect for germination and fine spray watering. Equipped with a unique quick connect system, the DAN-agri-connector sprinklers are easy to move and no tools are required for the connection to the supply pipe. They cover an area of 10' to 24' depending on the nozzle, spreader and spinner used. A 2' or 4' galvanized steel rod is provided with the kit to fasten the sprinklers to the ground. 5' spacing is required between the sprinklers.

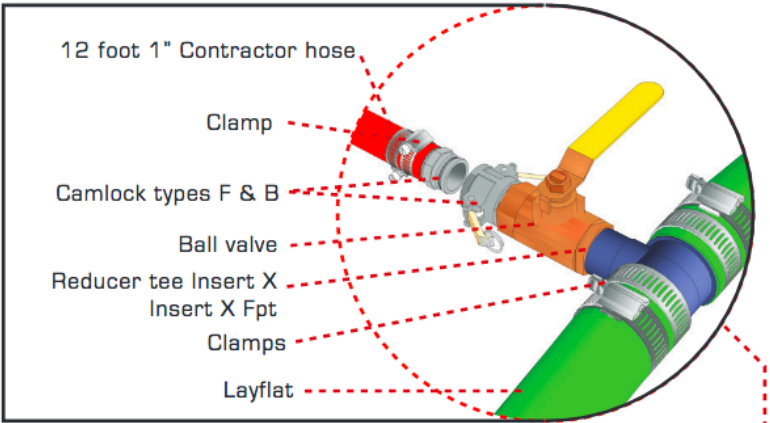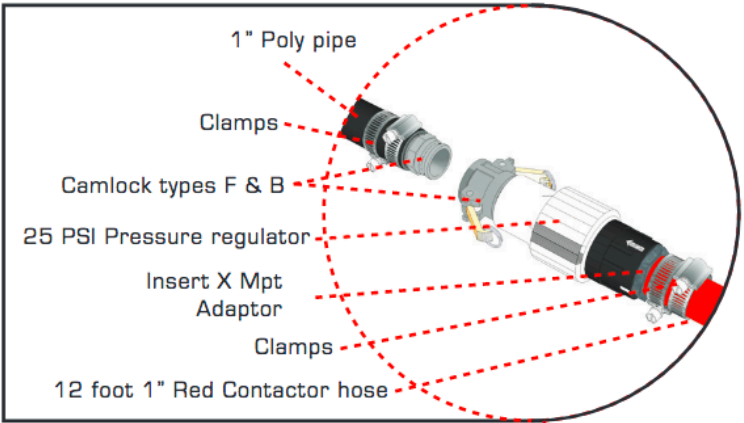

Orange Spinner
IS 11850215
Yellow Anti-mist device
IS 11850016

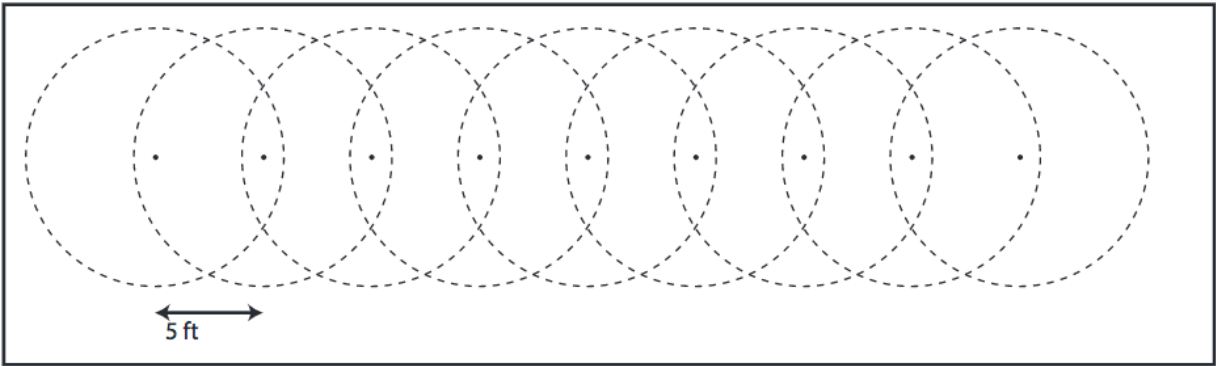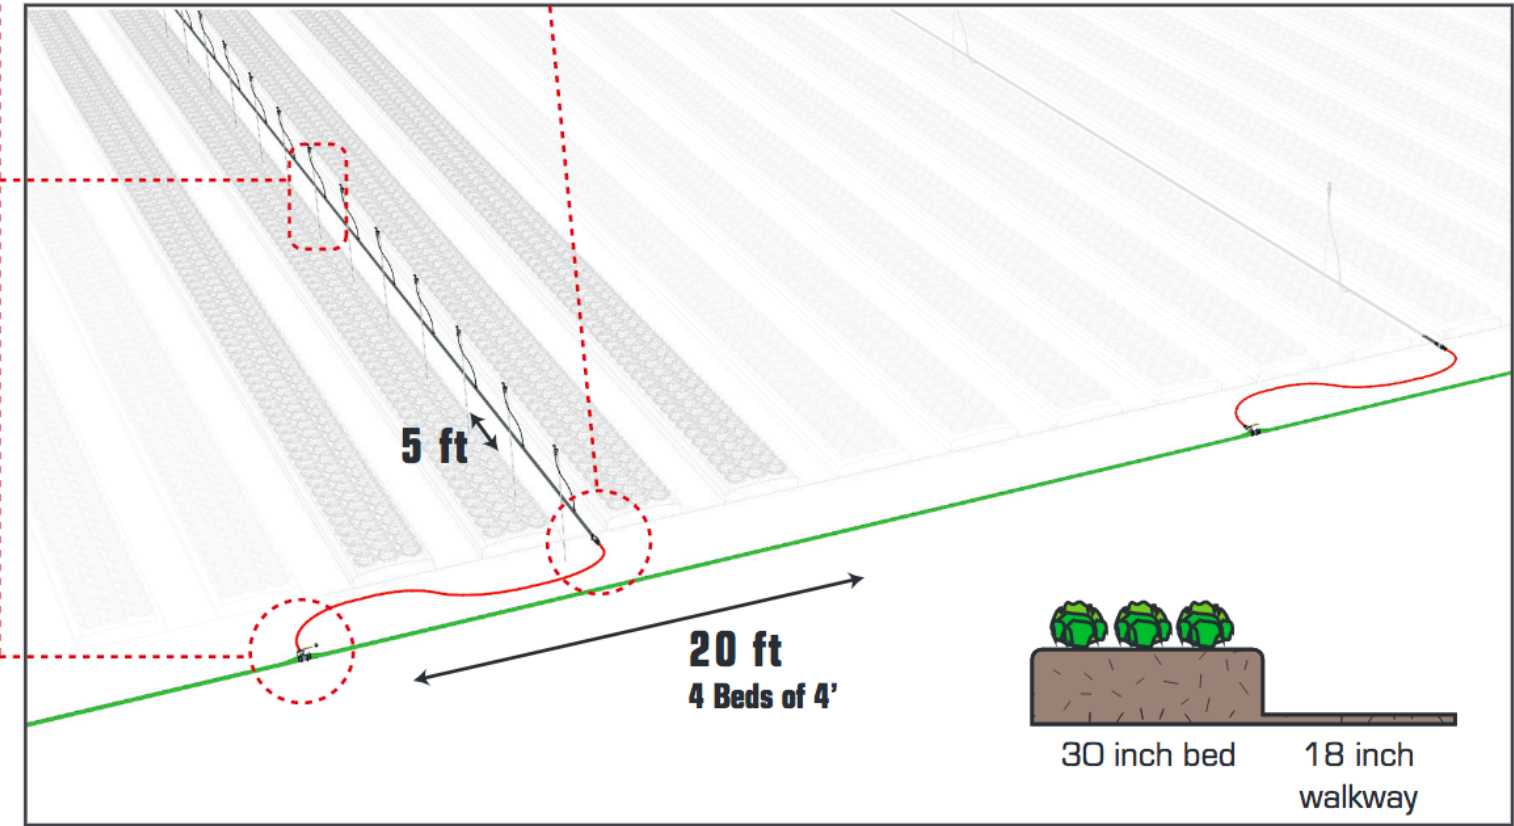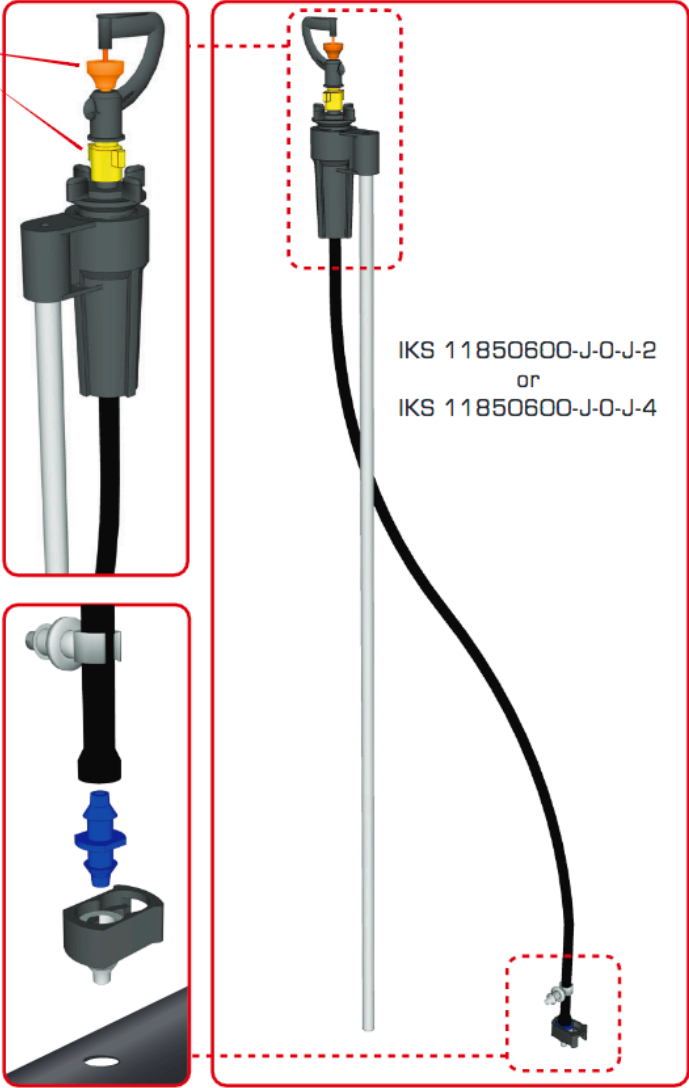

Model	Flow rate	Pressure	Anti-mist	Diameter	Spacing
IKS 11850600-J-0-J-2 IKS 11850600-J-0-J-4	20.3 GPH 22.3 GPH 24.4 GPH 27.0 GPH	25 PSI	Yes	20'	5' O.C. Inline 20' distance between lines

450.454.3961
1.800.667.6279
DUBOISag.com



Spinnet Sprinklers with Anti-Drain Valve in Caterpillar Greenhouse set-up as described by JM Fortier organic grower

SpinNet™ micro-sprinklers are constructed without a "bridge" to retain the spinner, producing a drip-less operation. This means that plants located below the sprinklers are not damaged from water dripping off the sprinkler. SpinNet™ hangs below the supply pipe preventing wetting of the pipe and dripping onto the plants below. SpinNet™ micro-sprinklers can be disassembled by hand should they need cleaning - no tools are required. Excellent uniformity distribution on a full coverage irrigation system.

Model	Flow rate	Combined Flow rate	Pressure	Anti-leak	Spacing	Bay Width
IS 0355120070BLB	18.4 GPH	10.1 GPM	35 PSI	Yes	3' distance between sprinklers	16'

