


	Conveyor Type Dishwasher E80 (Electric, right to left or left to right)		
		Brand	ELETRROBAR
		Description	Conveyor Type Dishwasher
		Model	E80
		Origin	China
	Application · For dishwash room of restaurant, employee dining room, etc. Function · Washing wares, such as plates, dishes, cups, glasses, utensils, and small pieces of cutlery (such as forks, knives, spoons, chopsticks) Wash capacity · 200 Racks/h (max. 3600 plates/h (8" plates), 5000 glasses/h (25 cells/rack)) Specifications · Loading height: 440 mm · Rack size: 500×500 mm · Wash temperature: 55-65℃ · Rinse temperature: 80-90℃ · Water consumption: 350L/h · Wash tank volume: 105L · Wash arms: upper 3 / lower 3 · Wash pump: 1.5kW · Tank heating: 12kW · Booster heating: 30kW · Total loading: 44kW · Voltage: 380V/50Hz/3N ~ · Dimensions(W×D×H): 1105×770×1450mm Features & benefits - Compact structure minimizes operating space requirement - Clear operating panel, mechanical buttons and digital temperature display - Anti-clogging wide angle nozzles provide a substantially broader pattern and avoid cleaning corner - Tank cover filter and screen basket of large volume make it easy to collect dirt - Temperature control function guarantees rinse temperature - Less requirements for fresh water and rinse aid by precise rinse - Inlet water pressure can be easily regulated by valve - Float switch ensures reliable water level control to avoid dry heating - Wash and rinse arms can be taken out and inserted without tools - Automatic overflow function of wash tank brings easy drainage operation		
01/16	HOBART / ITW FEG		1/2

Conveyor Type Dishwasher E80

(Electric, right to left or left to right)

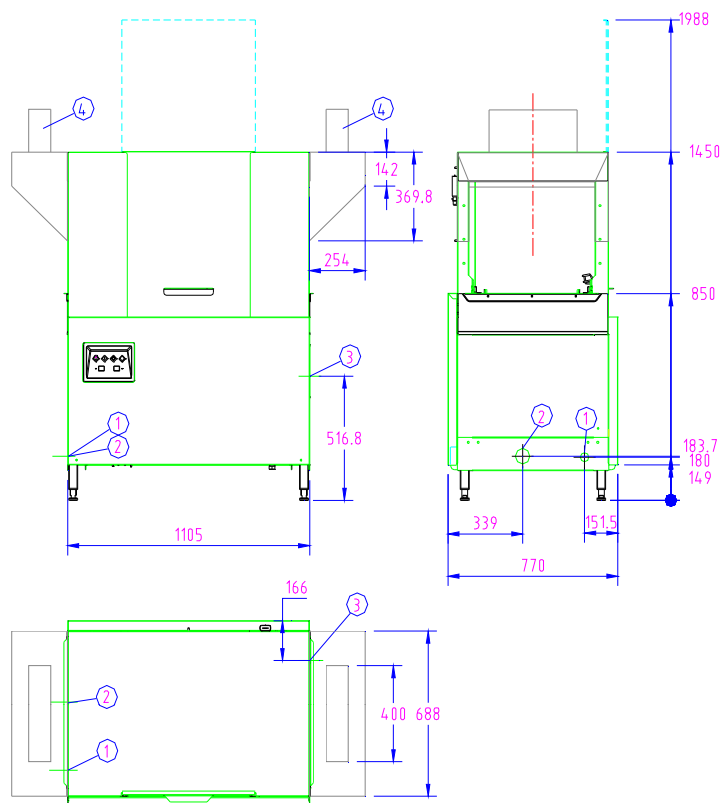

Installation parameters:

(1) tank filling (1.1) booster filling	pipe diameter	G3/4" outside
	pipe length	2000mm
	pressure	150 ~ 600KPa
	filling temperature	10 ~ 82°C
	min. flow rate	350L/h
(2) tank drain	pipe diameter	DN50
	pipe length	1260mm
(3) electrical connection	voltage	380V/50Hz/3N ~
	total loading	44kW
	fuse	76.5A
	cross section	25mm ²
ventilation	offered by third part	> 600m ³ /h

Note:

- (a) Must install the main switch to disconnect electrical power to the machine and manual shut off valves for water.
- (b) All drain and ventilation connections must be made in accordance with national codes.
- (c) Pipework external of the machine is to be done on site.