




Undercounter Glass & Dishwasher E50



Undercounter Glass & Dishwasher

E50

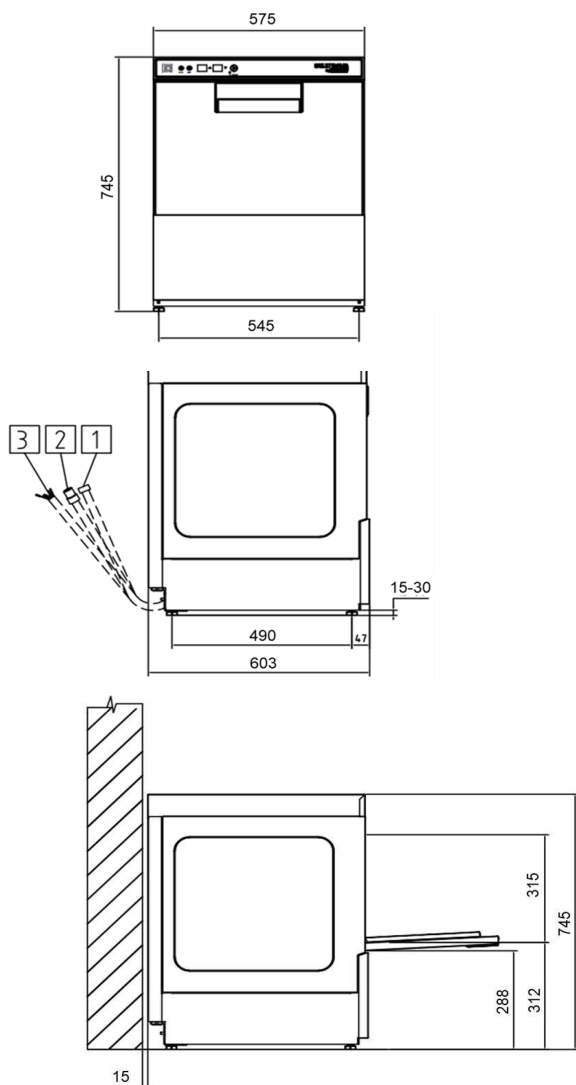

Specification

- Loading Height: 315mm
- Rack Size: 500×500mm
- Wash Temperature: 55~60 °C
- Rinse Temperature: 82~90 °C
- Water Consumption: 2.2L
- Wash Tank Volume: 18L
- Wash Pump: 0.47kW
- Tank Heating: 2kW
- Booster Heating: 7.5kW (380V/50Hz/3N~)
2.5kW (220V/50Hz/1N~)
- Total loading: 7.97 kW (380V/50Hz/3N~)
2.97 kW (220V/50Hz/1N~)
- Dimensions: 575×603×745mm (W×D×H)
- Net weight: 63kg

Features & benefits

- New generation control system with optimized control logic for more energy saving
- LED wash and rinse temperature display makes it easy to monitor
- Beep reminder to ensure operational safety and enhance work efficiency
- Newly designed door handle for smooth and convenient operation
- Robust and durable double skin door, reduces heat emission
- Equipped with a 470W high-power washing pump, delivering outstanding cleaning performance and significantly enhancing work efficiency
- Built-in rinse pump assures sanitizing rinse independent of actual water pressure
- Thermostop feature, ensure rinse temperature above 82°C per washing cycle
- Durable wash arm and rinse arm, flexible in rotation, brings efficient water distribution
- Patented anti-clog Nozzle Fan provide a broader and more precise spraying pattern
- Compact body size fit various counter heights, allowing for flexible on-site use
- The power supply connection can be changed easily from 3 phase to single phase electric on site when necessary

Options:

- Integrated detergent & rinse aid dispenser
- Integrated drain pump for high drain position(max. 0.6m)

Installation Parameters

① water filling	pipe diameter	G3/4"	
	length	2000mm	
	pressure	0.5~6bar	
	flow rate	5L/min	
	filling temperature	10~60°C	
② drain	pipe diameter	DN20 inner/DN25 outer	
	length	1500mm	
	max. drain height	60mm	
③ electrical connection	voltage	380V/50Hz/3N~	220V/50Hz/1N~*
	total loading/ fuse	7.97kW/14.5A	2.97kW/14.5A
	cross section	4mm ²	
	power cord length	1500mm	

Note:

- Must install the main switch to disconnect electrical power to the machine and manual shut off valves for water.
- All drain and ventilation connections must be made in accordance with national codes.
- Pipework external of the machine is to be done on site.

*The machine can be changed to single phase electric connection on site with reduced power loading.

HOBART | HOBART Food Equipment Co.,Ltd.

China / No. 8, Yesheng Rd., Xiqing Economic-Technological Development Area, Tianjin (300385) | Tel +86 022-58326100

China / 4B, No. 2 Xinye Building, 398 Tianlin Rd., Xuhui District, Shanghai (200233) | Tel +86 021-34612000 | Fax +86-21-3461716

Service Hotline 400-6000-976 | www.hobartchina.com