



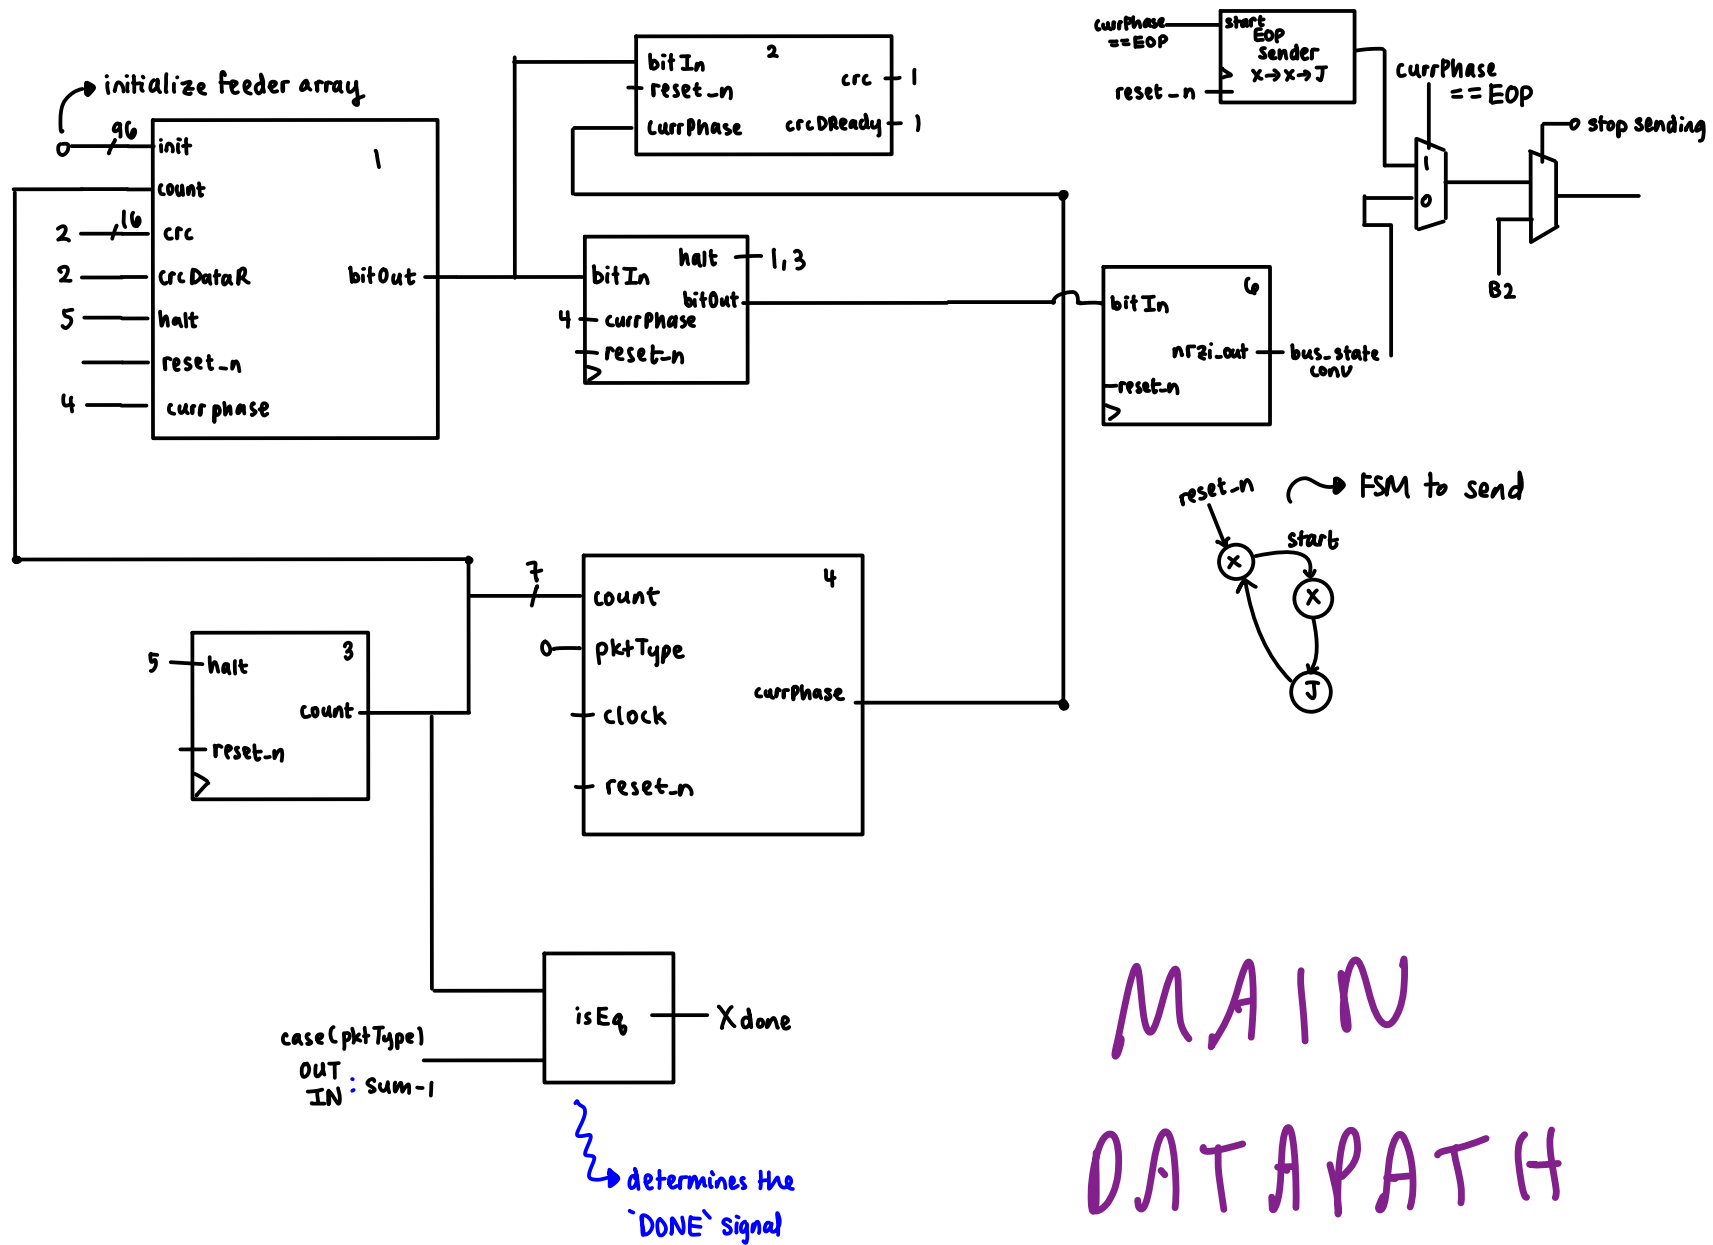

Bit Stuffing

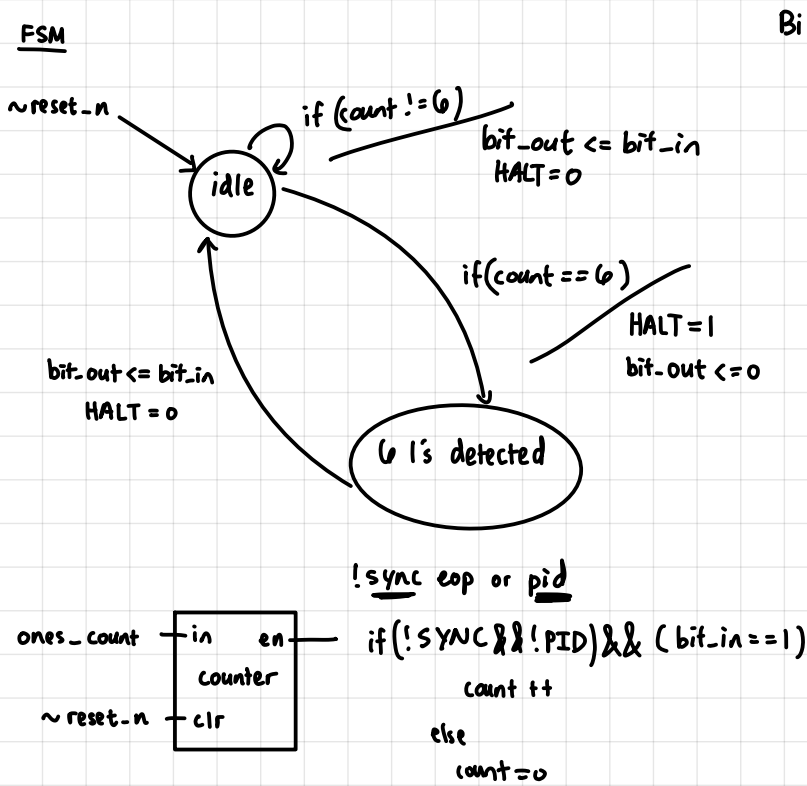


phase determined by enum statements

* SYNC, PID, ADDR, ENDP, DATA, CRC *

CRC Generation.


Uses CRC5 Datapath from L15.

FSM:

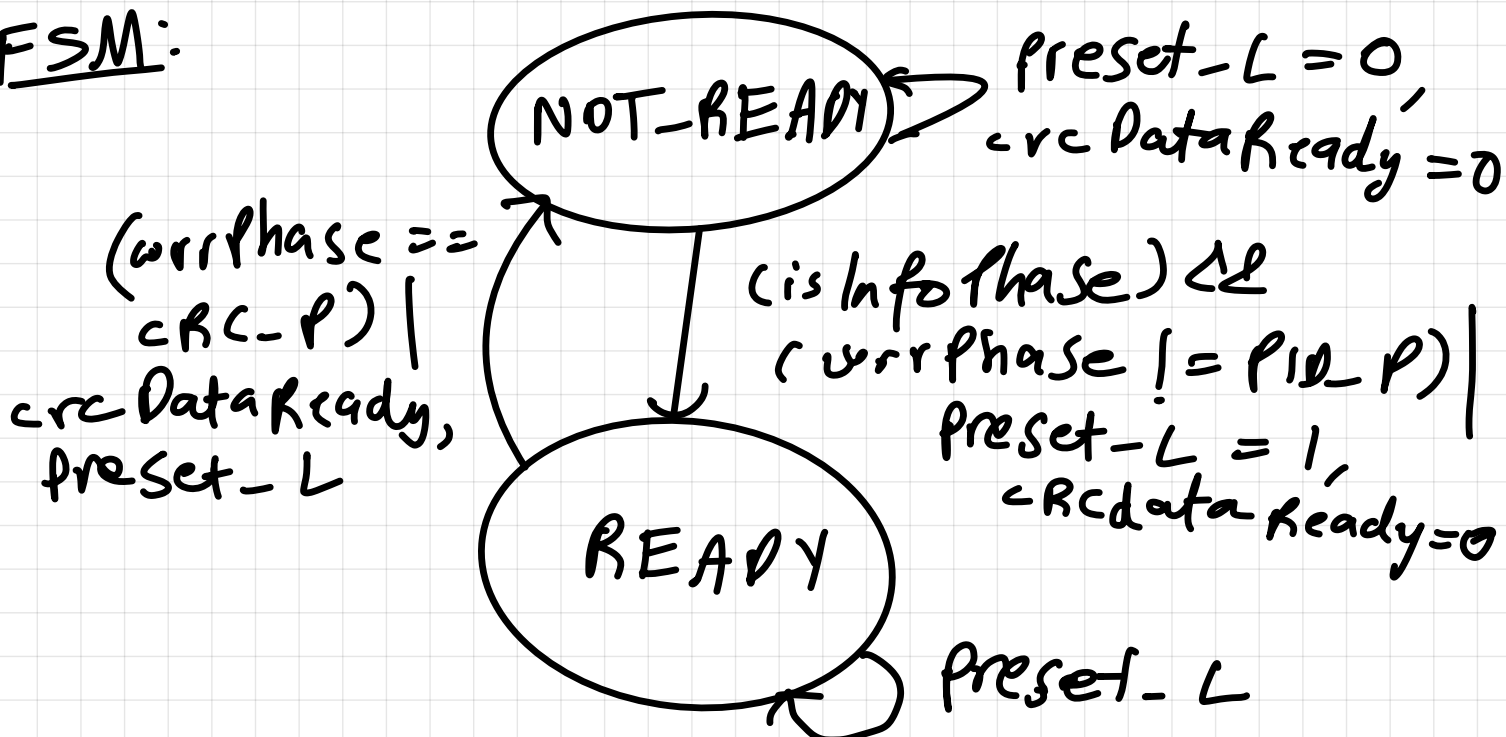

where
isInfoPhase = 1 when current phase
is PAYLOAD-P, ADDR-P, PID-P,
END-P.

Feeder Array (NO FSM)

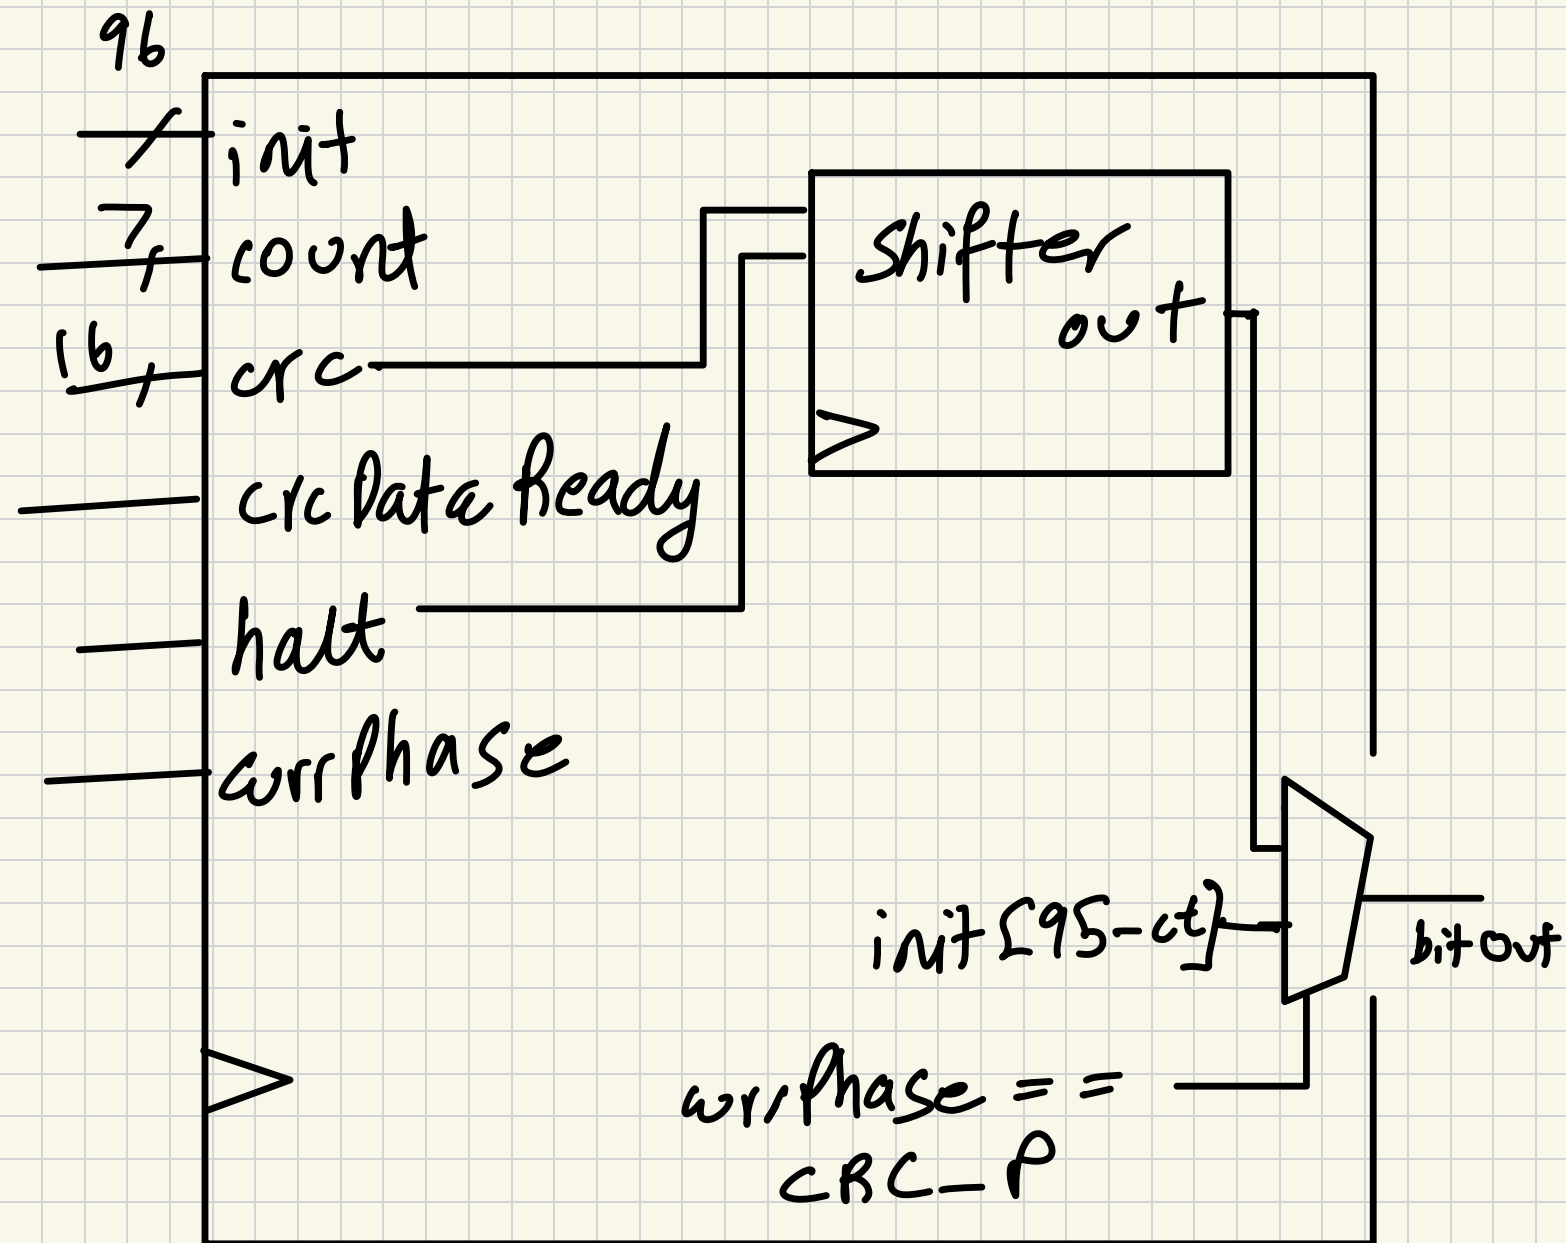

NRZI Encoding

USB NRZI Encoding

- all field types are sent through NRZI except for EOP

Assume $\text{prev_val} \leq 1$

0 $\rightarrow$ toggling output


1 $\rightarrow$ leaving output as is

0000_0001
0

NRZI

$\hookrightarrow$ toggling = 0
output as is = 1

data $\downarrow$ nrzi_out
0000_0001 $\rightarrow$ 0000_0001
0101 0100

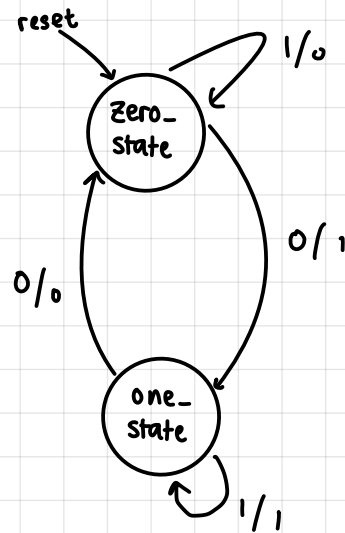

System FSM [send packet Helper]

