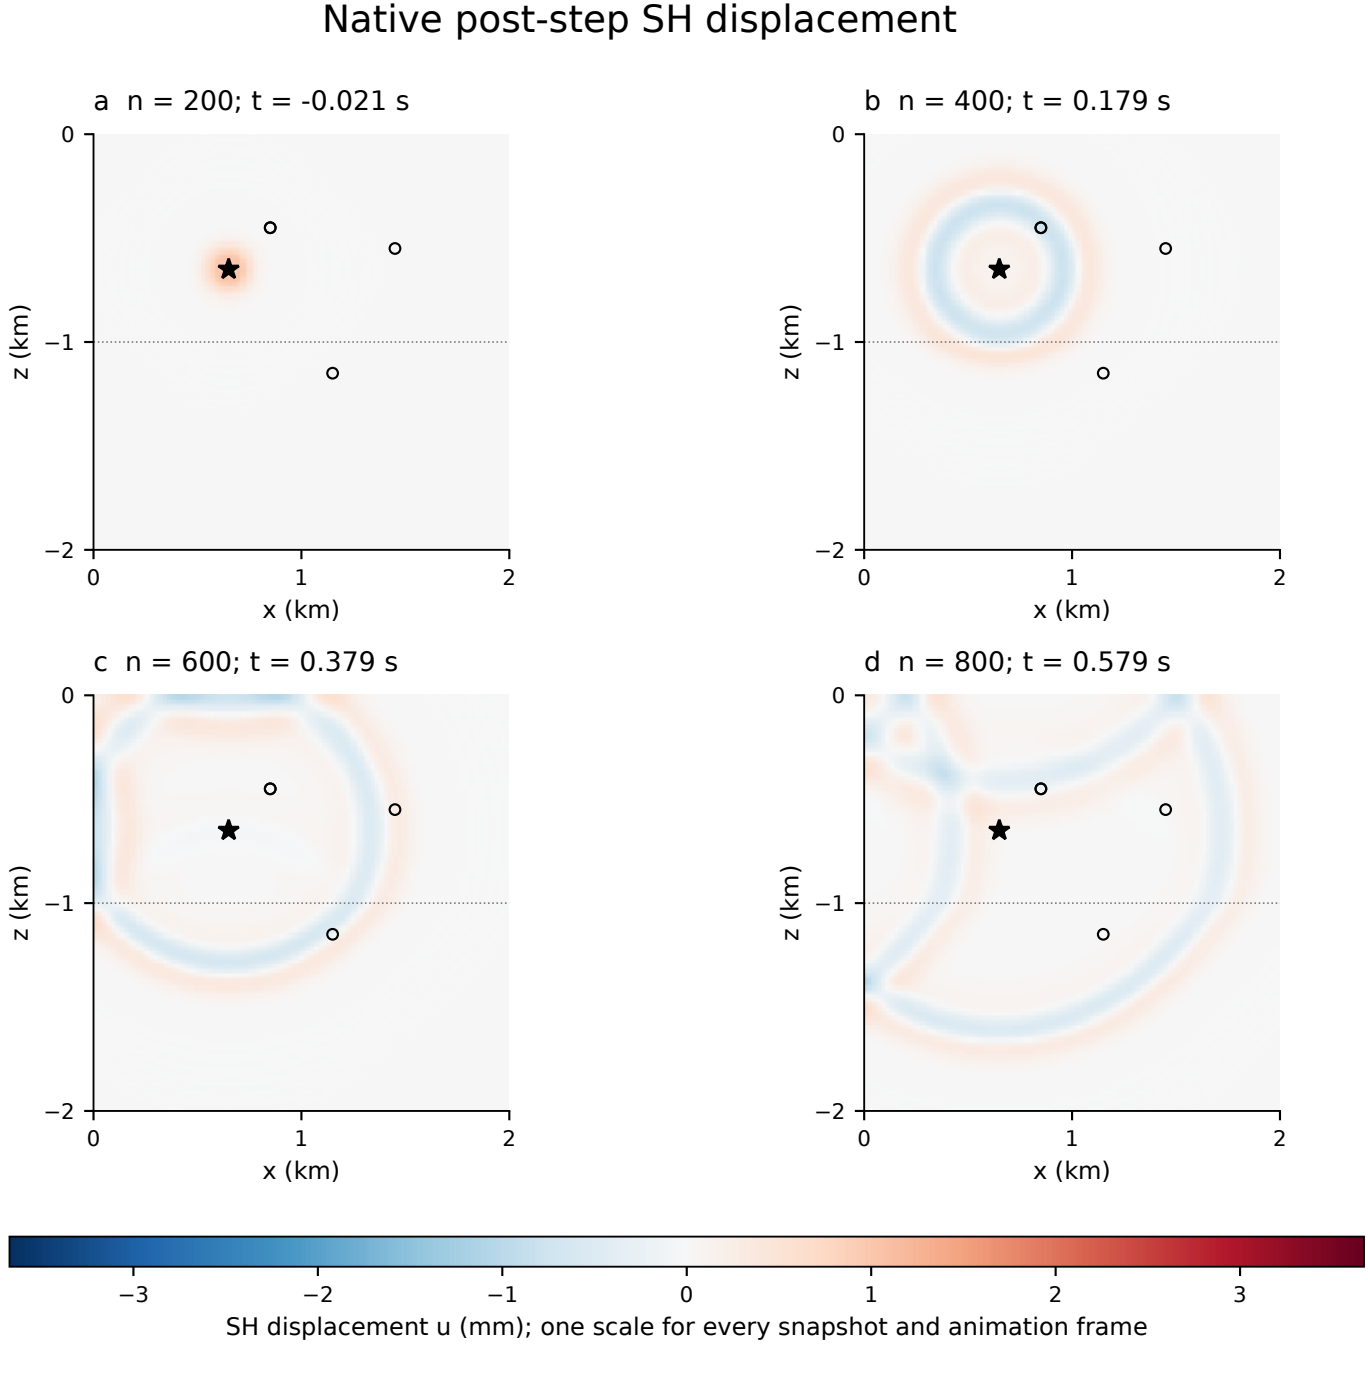
Native post-step SH displacement
a n = 200; t = -0.021 s
b n = 400; t = 0.179 s
c n = 600; t = 0.379 s
d n = 800; t = 0.579 s
z (km)
x (km)
0
−1
−2
1
2
−3
SH displacement u (mm); one scale for every snapshot and animation frame
Source
Receivers (R01 = R03)
Material interface
t is the upstream trace label: (n − 1) × 0.001 − 0.22 s; elapsed native time is n × 0.001 s