


Warda yousaf

SP23-BSE-042

NETWORK

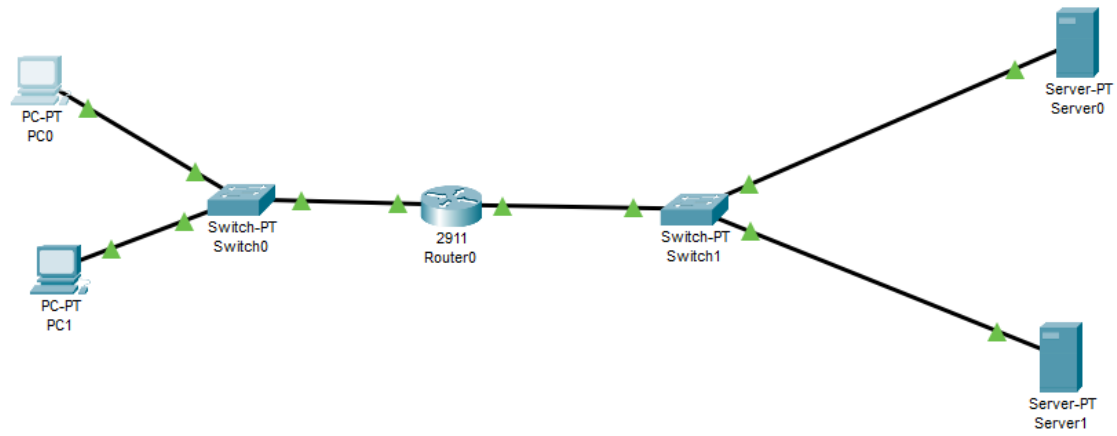

Router configuration

IOS Command Line Interface

San Jose, California 95134-1706

Cisco IOS Software, C2900 Software (C2900-UNIVERSALK9-M), Version 15.1(4)M5, RELEASE SOFTWARE (fc2) Technical Support: <http://www.cisco.com/techsupport>
Copyright (c) 1986-2007 by Cisco Systems, Inc.
Compiled Wed 18-Jul-07 04:52 by pt_team
Image text-base: 0x2100F918, data-base: 0x24729040

This product contains cryptographic features and is subject to United States and local country laws governing import, export, transfer and use. Delivery of Cisco cryptographic products does not imply third-party authority to import, export, distribute or use encryption. Importers, exporters, distributors and users are responsible for compliance with U.S. and local country laws. By using this product you agree to comply with applicable laws and regulations. If you are unable to comply with U.S. and local laws, return this product immediately.

A summary of U.S. laws governing Cisco cryptographic products may be found at:
<http://www.cisco.com/wwl/export/crypto/tool/stqrg.html>

If you require further assistance please contact us by sending email to export@cisco.com.

Cisco CISCO2911/K9 (revision 1.0) with 491520K/32768K bytes of memory.
Processor board ID FTX152400KS
3 Gigabit Ethernet interfaces
DRAM configuration is 64 bits wide with parity disabled.
255K bytes of non-volatile configuration memory.
249856K bytes of ATA System CompactFlash 0 (Read/Write)

Press RETURN to get started!


%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up


Copy

Paste

IP PC1

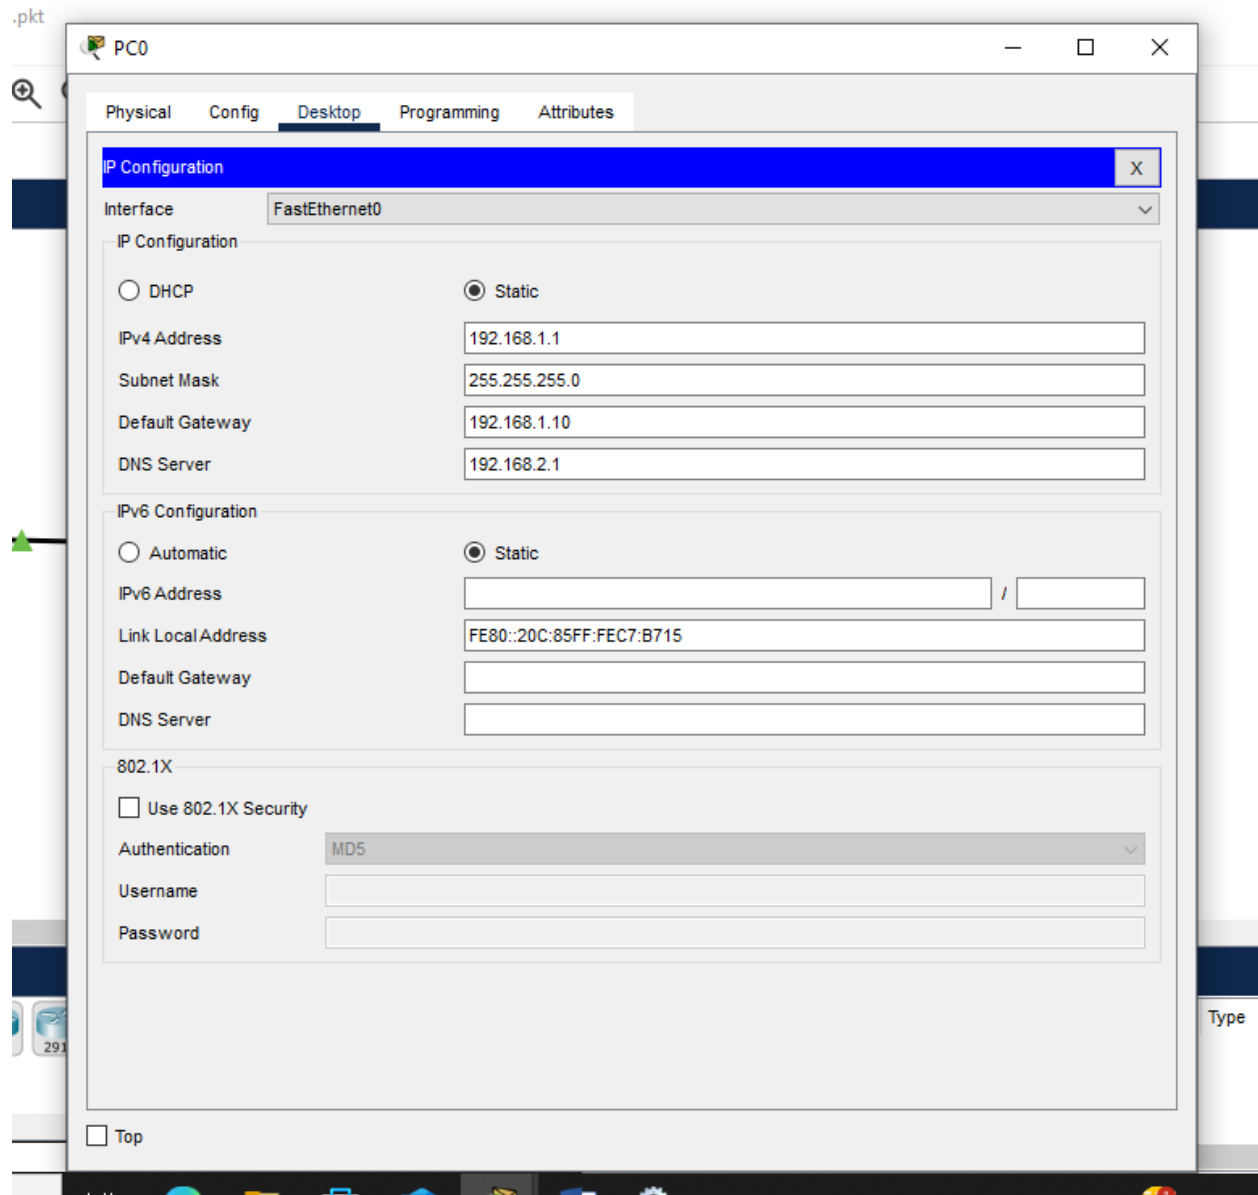

IP PC 2

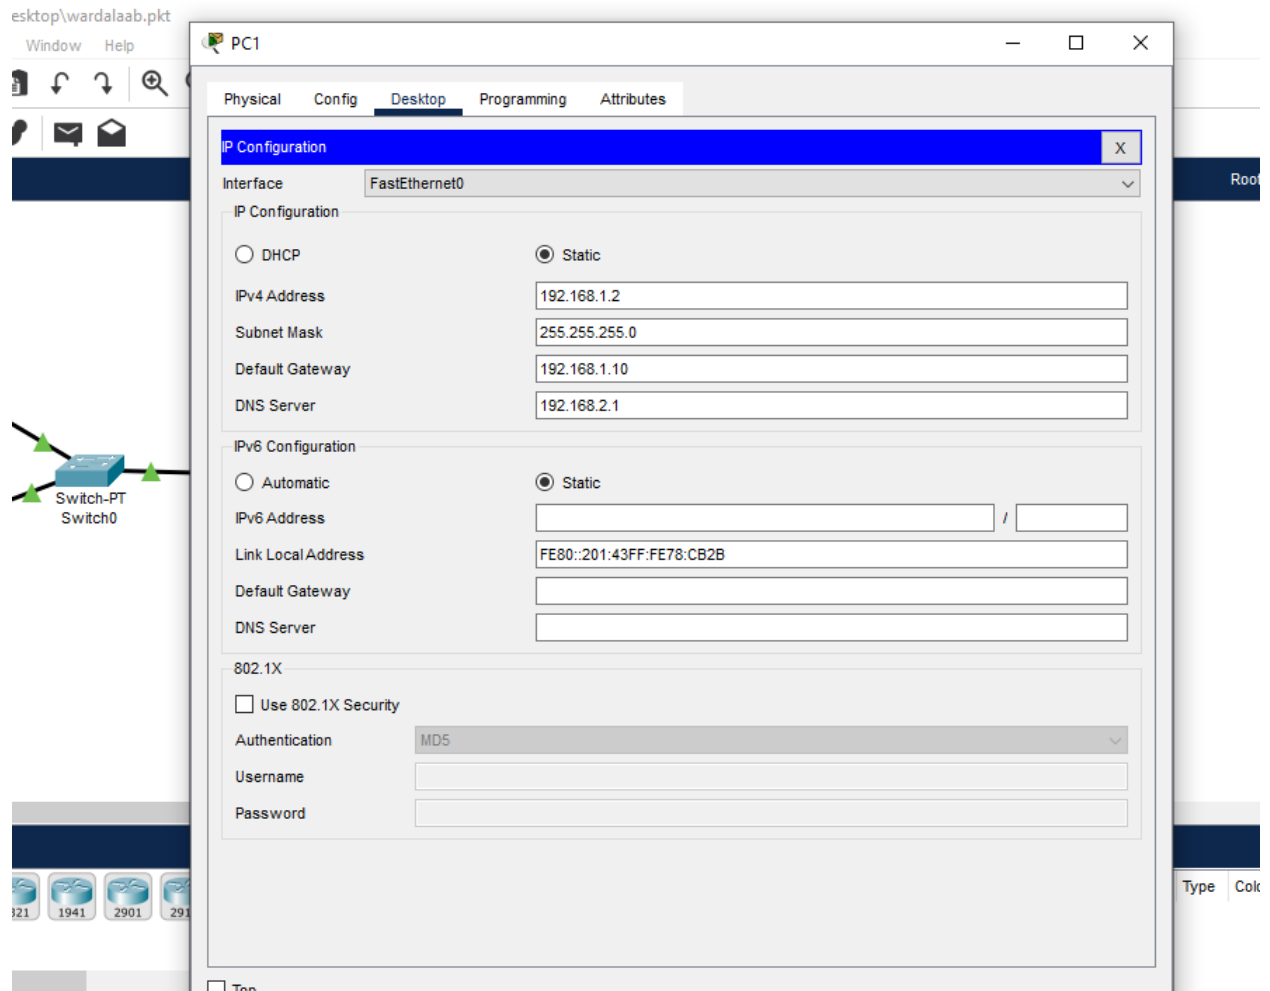

SERVER 1 IP CONFIGER

Server0

Physical Config Services Desktop Programming Attributes

IP Configuration

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 192.168.2.1

Subnet Mask 255.255.255.0

Default Gateway 192.168.2.10

DNS Server 192.168.2.1

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address /

Link Local Address FE80::204:9AFF:FE01:5552

Default Gateway

DNS Server

802.1X

☐ Use 802.1X Security

Authentication MD5

Username

Password

Top

SERVER 2 IP CONFIGER

Server1

Physical Config Services **Desktop** Programming Attributes

IP Configuration X

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 192.168.2.2

Subnet Mask 255.255.255.0

Default Gateway 192.168.2.10

DNS Server 192.168.2.1

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address /

Link Local Address FE80::20A:41FF:FE2A:E19A

Default Gateway

DNS Server

802.1X


☐ Use 802.1X Security

Authentication MD5


Username

Password

SERVER SERVICE DNS ENABLE

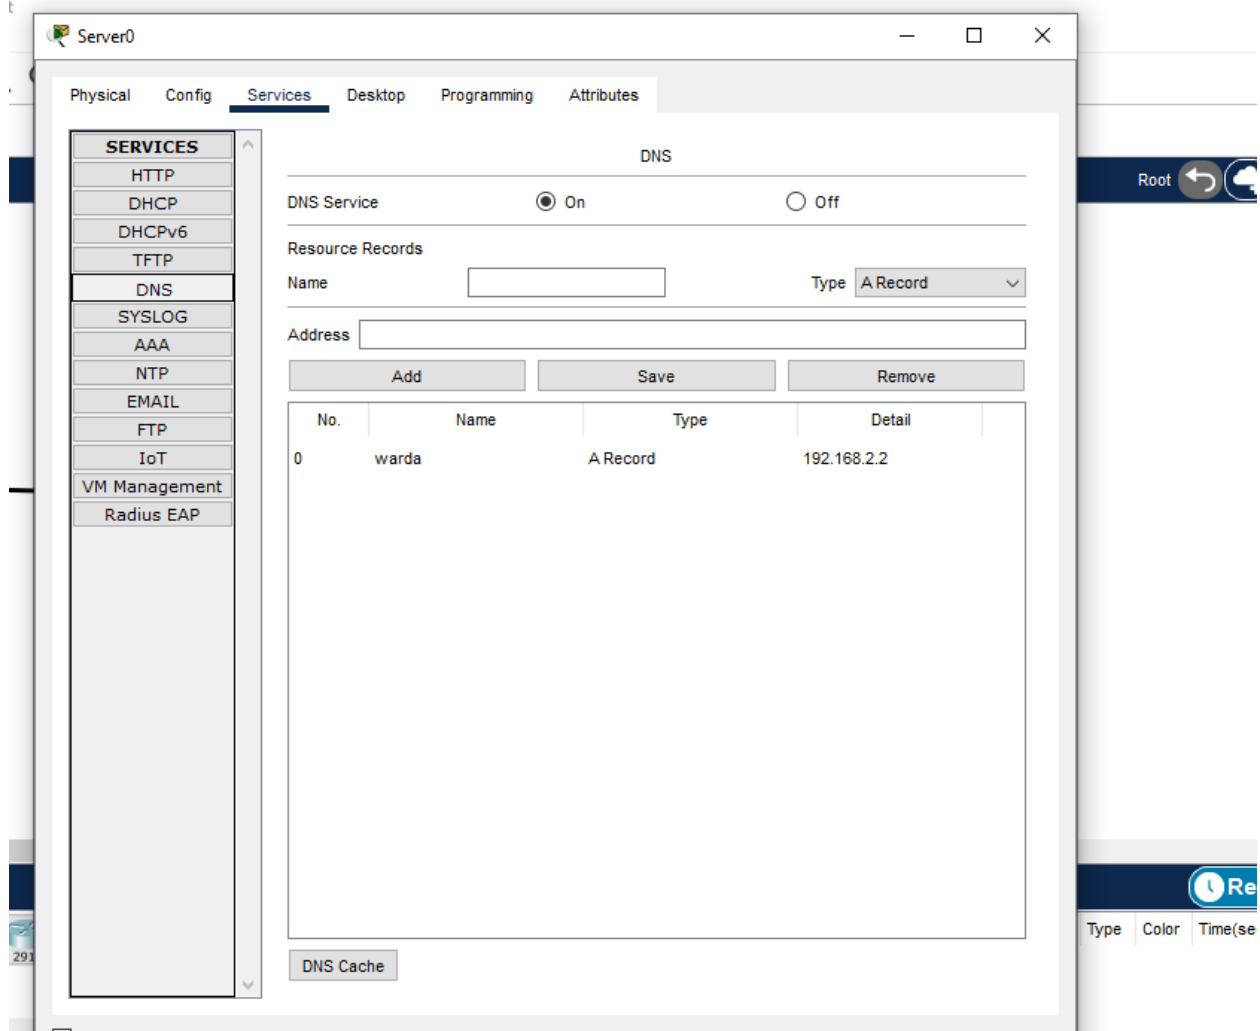

Command prompt of pc1

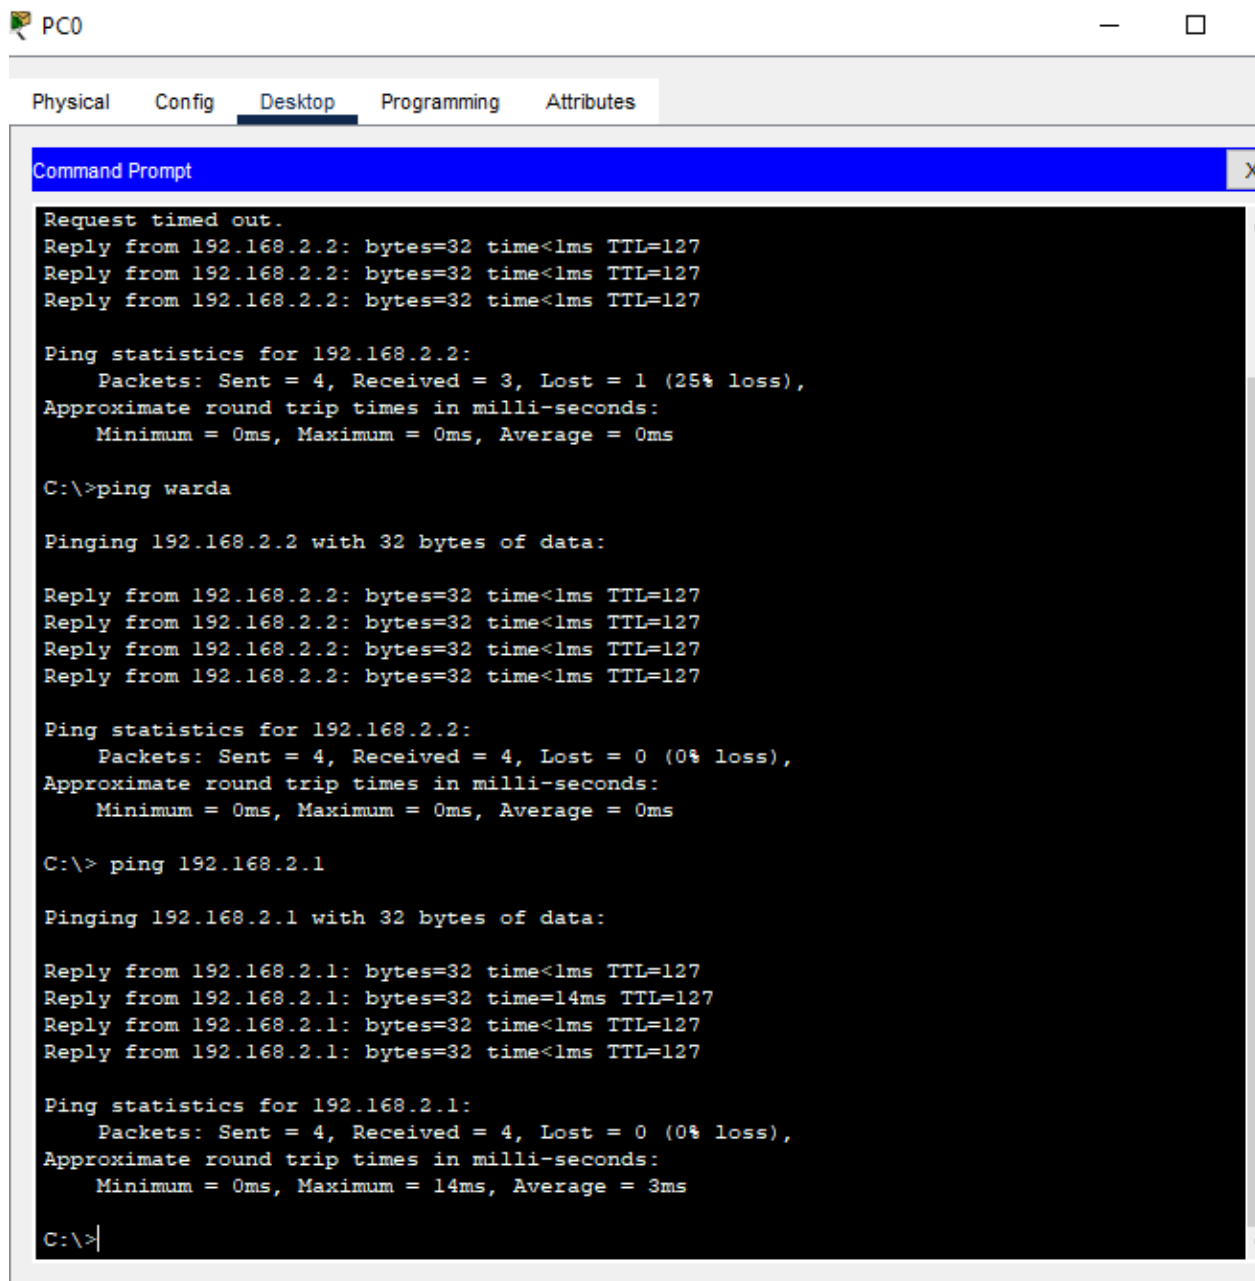

http edit

Server0

Physical

Config

Services

Desktop

Programming

Attributes

SERVICES

HTTP

DHCP

DHCPv6

TFTP

DNS

SYSLOG

AAA

NTP

EMAIL

FTP

IoT

VM Management

Radius EAP

HTTP

On

Off

HTTPS

On


Off

File Manager

	File Name	Edit	Delete
1	copyrights.html	(edit)	(delete)
2	cscoptlogo177x111.jpg		(delete)
3	helloworld.html	(edit)	(delete)
4	image.html	(edit)	(delete)
5	index.html	(edit)	(delete)

New File

Import

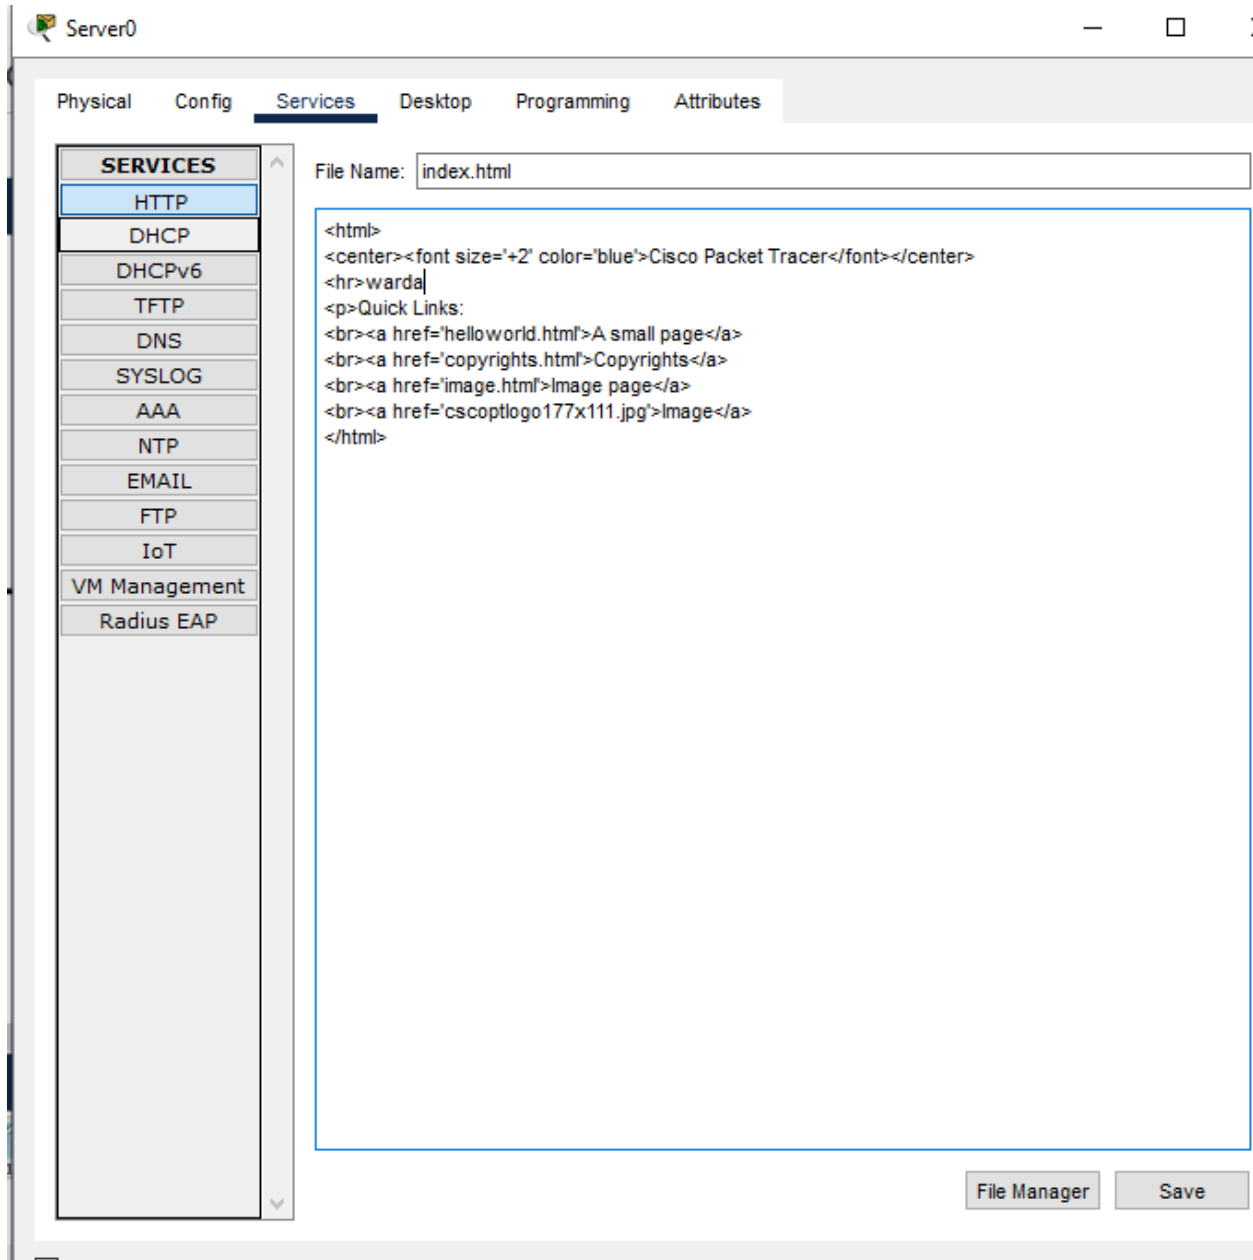

Web page access

