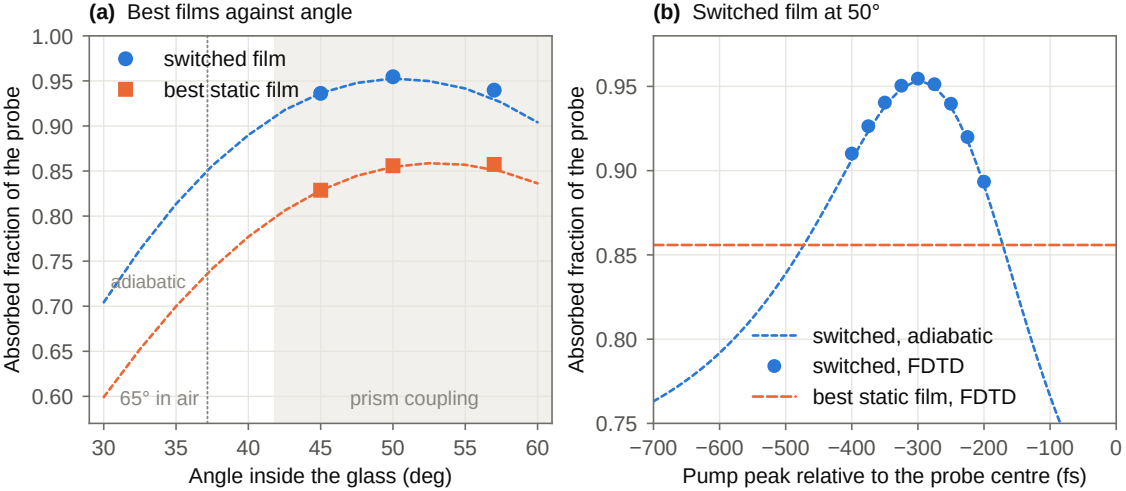
(a) Best films against angle
switched film
best static film
adiabatic
65° in air
prism coupling
Absorbed fraction of the probe
Angle inside the glass (deg)
1.00
0.95
0.90
0.85
0.80
0.75
0.70
0.65
0.60
30
35
40
45
50
55
60
(b) Switched film at 50°
switched, adiabatic
switched, FDTD
best static film, FDTD
Absorbed fraction of the probe
Pump peak relative to the probe centre (fs)
0.95
0.90
0.85
0.80
0.75
−700
−600
−500
−400
−300
−200
−100
0