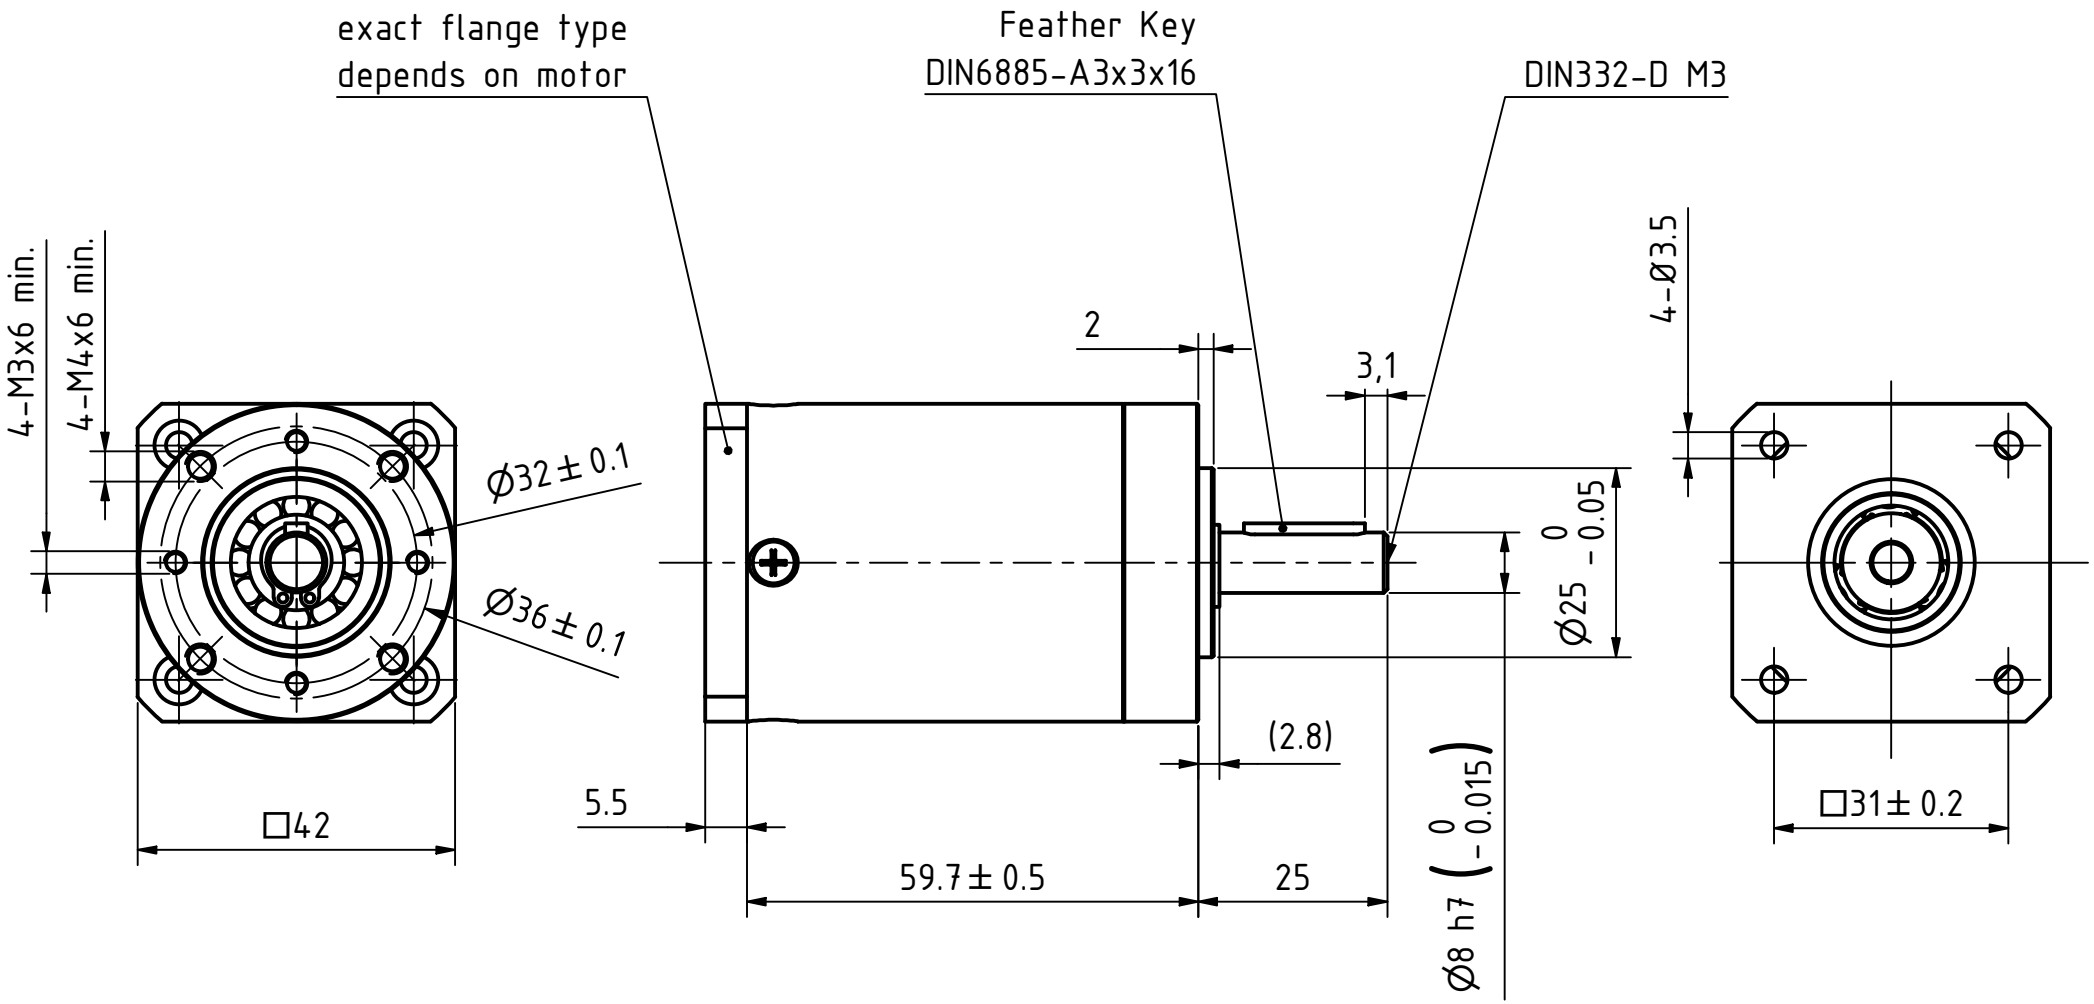


GEARBOX SPECIFICATION			
Reduction Ratio		19.66 (570/29)	
No. of Stages		2	
Rated Output Torque	Nm	3.5	
Max. Output Torque	Nm	7.1	
Rated Input Speed	rpm	3,000	
Max. Input Speed	rpm	11,000	
Backlash	°	0.6	
Efficiency	%	82	
Lifetime	h	5,000	
Max. Axial Force	N	920	
Max. Radial Force (shaft middle)	N	310	
Gearbox Inertia	kg m²	0.419	x10^{-6}
Ambient Temperature	°C	-10 ... 50	
Protection Class		IP54	

ISO 8015	ISO 1302	ISO 2768 cK	ISO 13715			Weight: ~0.38kg
				Date	Name	
			Drawn	02.11.2022	Kaiming._C	GP42-N2-20-SR
			Reviewed	03.11.2022	Kaiming._C	
			Released	03.11.2022	Kaiming._C	Scale: 1 : 1
00			Nanotec® PLUG & DRIVE			20001762
REV	Rev. Text	Name	Date			A4 Page 1
				State: Released	Rev: 00	CONFIDENTIAL