
21 T5 / 18-2

optibelt ZRS Metric Timing Belt Pulleys for cylindrical bores
Profile acc. to ISO 17396 / DIN 7721 Part 2

3D-View

To activate the interactive 3D view, you must trust this document (see hint on the top) in Adobe Acrobat and click on the question mark.

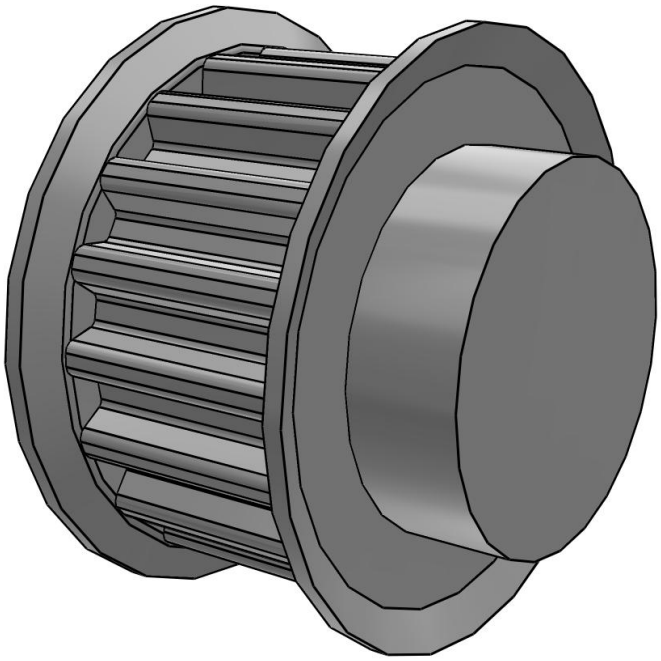

Zoom

Moves you toward or away from objects in the scene when you drag vertically. You can also zoom with the hand tool by holding down Shift as you drag.

Pan

Moves the model vertically and horizontally only. You can also pan with the hand tool: Ctrl-drag.

Rotate

Turns 3D objects around relative to the screen. How the objects move depends on the starting view, where you start dragging and the direction in which you drag.

© OPTIBELT GMBH, GERMANY

Optibelt GmbH
Corveyer Allee 15
37671 Höxter/Germany


Telefon: +49 5271 621
Telefax: +49 5271 976200

www.optibelt.com
info@optibelt.com


21 T5 / 18-2

optibelt ZRS Metric Timing Belt Pulleys for cylindrical bores
Profile acc. to ISO 17396 / DIN 7721 Part 2

2D-View

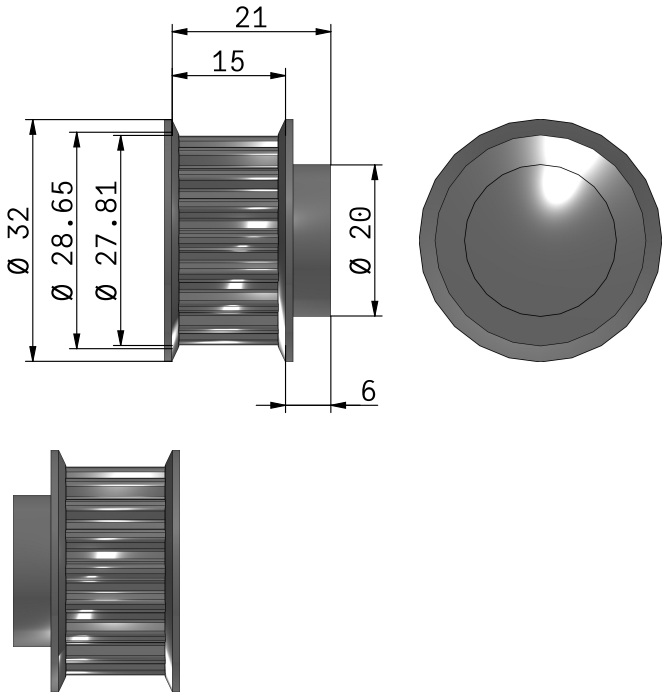

ISO-View

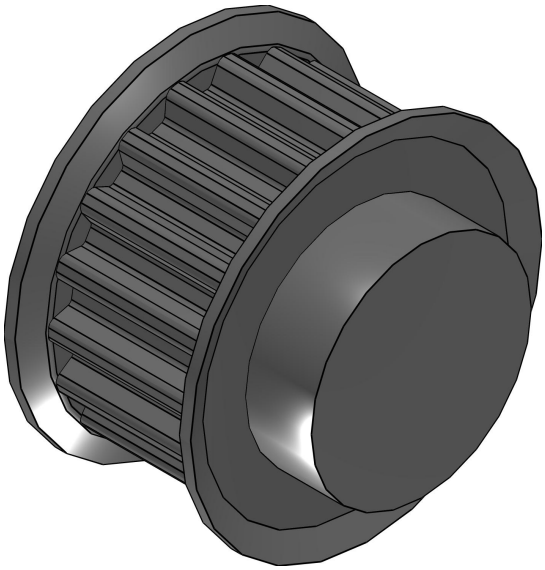

© OPTIBELT GMBH, GERMANY

Optibelt GmbH
Corveyer Allee 15
37671 Höxter/Germany

Telefon: +49 5271 621
Telefax: +49 5271 976200


www.optibelt.com
info@optibelt.com

21 T5 / 18-2

optibelt ZRS Metric Timing Belt Pulleys for cylindrical bores
Profile acc. to ISO 17396 / DIN 7721 Part 2

Technical Data

BEZ (Designation Sales)	21 T5 / 18-2
ANR (Part ID)	1715850
GTIN (Global Trade Item Number)	4014486226263
ZAE (Number of Teeth)	18
AUSFNR (Type ID)	6F
ABSN (Number of Flanges)	2
BW (Belt Width / mm)	10.00
PD (Pitch Diameter / mm)	28.65
OD (Outside Diameter / mm)	27.81
FD (Flange Diameter / mm)	32.0
F (Face Width / mm)	15
K (K / mm)	0
L (L / mm)	21
M (M / mm)	6
N (N / mm)	20
J (J / mm)	0
D (Pilot Bore / mm)	0
DBMAX (max. Bore Diameter / mm)	12
AUSF (Type)	Solid pulley
MATERIAL (Material)	Aluminum 6082 T6
MATBS (Material Flange)	Steel
GEWICHT (Weight / kg)	0.03
OF (Surface Treatment)	-
WG (Balancing Grade)	Not Balanced
QS (Quality Standard)	acc. to ISO 254

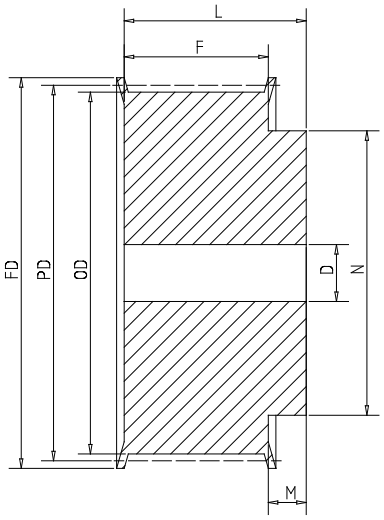

We reserve the right to make technical changes. Additional information can be found in the Technical Manual Rubber / Polyurethane Timing Belts. Profiles not to scale, measurements may vary.

© OPTIBELT GMBH, GERMANY

Optibelt GmbH
Corveyer Allee 15
37671 Höxter/Germany
Telefon: +49 5271 621
Telefax: +49 5271 976200
www.optibelt.com
info@optibelt.com