


CAAZZ_CAASZZ

3D view

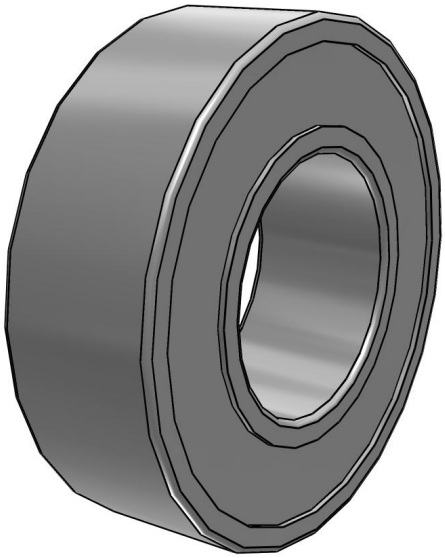

HOW TO ACTIVATE 3D?

To activate the interactive 3D view in Acrobat Reader, you need to select, at the top of the page, **Options** and then **Trust this document**

Zoom

Moves you toward or away from objects in the scene when you drag vertically. You can also zoom with the hand tool by holding down Shift as you drag.

Pan

Moves the model vertically and horizontally only. You can also pan with the hand tool: Ctrl-drag.


Rotate

Turns 3D objects around relative to the screen. How the objects move depends on the starting view, where you start dragging and the direction in which you drag.

Augmented Reality (AR) - Digital meets real


Augmented Reality, often shortened to AR, is a technology that blends digital information into the real world.
For more information, please click here or directly try yourself by scanning the QR code with your phone.

SCAN ME



CAAZZ_CAASZZ

2D derivation

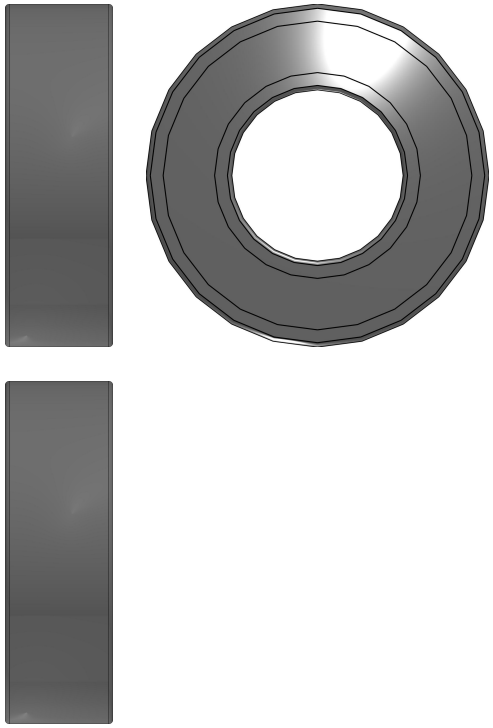


ISO view



Bill-Of-Materials

N°	Description	Amount
1.1	CAA-688ZZ-JJ	1




CAAZZ_CAASZZ

Technical drawings

轴承 深沟球轴承 双盖型微型

iHF



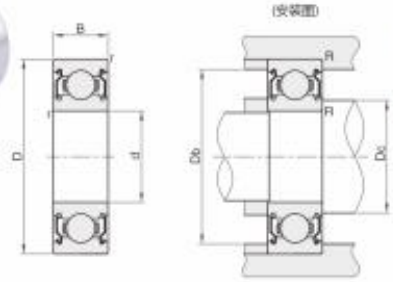

系列码	后置代码	类型	材质
CAA	ZZ (双面带防尘盖)	- (标准型) -JK(进口型) -JJ(经济型)	轴承钢 SUJ2
CAAS			不锈钢 SUS440C
CAAU			不锈钢 SUS304

⚠ 经济型适用于轻载、中低转速、中等精度。

精度 GB/T307 0级

型式 ❶系列码	❷轴承	d	D	B	r (min)	容许转速 krpm (参考)	基本额定负载 Cr(动)kN	基本额定负载 Co(静)kN	安装尺寸 Dc (min)	安装尺寸 Ds (max)	安装尺寸 Ds (max)	安装尺寸 R (max)
	682ZZ	2	5	2.3	0.08	85	0.15	0.04	2.6	2.7	3.9	0.08
	692ZZ		6	3	0.15	75	0.28	0.08	3	3.2	4.8	0.15
	602ZZ		7	3.5		60	0.33	0.10	3.2	3.8	5.8	0.15
	682AZZ	2.5	6	2.6	0.08	71	0.18	0.06	3.7	3.7	4.9	0.08
	692AZZ		7	3.5	0.15	63	0.33	0.10	3.8	3.8	5.65	0.15
	673ZZ	3	8	2.5	0.1	71	0.18	0.06	3.6	3.7	5.4	0.08
	683ZZ		7	3	0.1	63	0.33	0.10	3.9	4	5.8	0.1
	693ZZ		8	4	0.15	60	0.48	0.14			6.6	0.15
	603ZZ		9	5	0.15	56	0.49	0.15	4.2	4.3	7.6	0.15
	623ZZ		10	4		50	0.54	0.18			8.8	0.15
	633ZZ		13	5	0.2	40	1.11	0.39	4.6	6	11.4	0.2
	674ZZ	4	7	2.5	0.1	60	0.22	0.09	4.6	4.8	6.4	0.08
	684ZZ*		9	4	0.1	53	0.54	0.18	5	5.2	7.8	0.1
	694ZZ		11		0.15	48	0.61	0.22	5.2	5.6	9.8	0.15
	604ZZ		12		0.2	48	0.82	0.28	5.6	5.6	10.4	0.2
CAA	624ZZ		13	5		40	1.11	0.39	5.6	6	11.4	0.2
	634ZZ		16		0.3	36	1.14	0.42	6	7.5	14	0.3
CAAS	675ZZ	5	8	2.5	0.1	53	0.17	0.07	5.8	5.8	7.4	0.1
	685ZZ		11	5	0.15	45	0.61	0.23	6.2	6.2	9.8	
CAAU	695ZZ		13	4	0.2	43	0.92	0.34	6.6	8.6	11.4	0.2
	605ZZ		14	5		40	1.11	0.40		6.9	12.4	
	625ZZ		16		0.3	36	1.47	0.54	7	7.5	14	0.3
	635ZZ		19	6		32	1.99	0.71	7	8.5	17	
	676ZZ	6	10	3	0.1	45	0.40	0.17	7	7	9.3	0.1
	686ZZ*		13	5	0.15	40	0.92	0.35	7	7.4	11.8	0.2
	696ZZ		15		0.2	40	1.14	0.42	7.6	7.9	13.4	
	606ZZ		17	6		38	1.92	0.67	8	8.2	15	
	626ZZ*		19		0.3	32	1.99	0.71		8.5	17	0.3
	636ZZ		22	7		30	2.83	1.14	8	10.5	20	
	678ZZ		12	3.5	0.1	40	0.43	0.22	9	9	11.33	0.1
	688ZZ		16	5	0.2	36	1.37	0.57	9.6	10.2	14.4	0.2
	698ZZ*	8	19	6		36	1.90	0.73		10	17	
	608ZZ*		22	7	0.3	34	2.80	1.10	10	10.5	20	0.3
	628ZZ		24	8		28	2.83	1.14		12	22	
	638ZZ		28	8		28	3.88	1.58	10	12.8	26	

⚠ SUS304材质仅适用轻载型
⚠ SUS304仅适用带"*"轴承

17 轴承座组件 轴承


选型举例

❶系列码	❷轴承	类型
CAA	682ZZ	
CAA	692ZZ	JK

轴承密封特性:

结构	双盖型(ZZ)	非接触橡胶密封圈型(VV)	接触橡胶密封圈型(DD)	无铁盖型
样例				
摩擦力矩	小	小	比ZZ、VV型大	小
高速性	良好	良好	源于接触密封的极限	良好
油密封性	良好	比ZZ型好	比VV型略好	差
防尘性	良好	比ZZ型好,部分粉尘条件下可用	最好,粉尘多的环境下可以使用	差
防水性	不透	不透	良好	不透
使用温度范围(℃)	-10~+110	10~+110	-10~+110	-10~+110


⚠ ■ 此颜色为2025版面修改更新处。



CAAZZ_CAASZZ

Technical data


CNSORDERNO (CNSORDERNO)	CAA-688ZZ-JJ
SC (Serial code)	CAA
PC (Post code)	ZZ(Double sided dust cover)
TYPE (type)	JJ:(Economic type)
MATP (Material of Pulley)	SUJ2
BEARING (bearing)	688ZZ
D (d / mm)	8.0
D1 (D / mm)	16
B (B / mm)	5.0
R (r / min)	0.20
KRPM (Allowable speed krpm)	36
CRKN (CrkN)	1.37
COKN (CokN)	0.57
DC (dc / min)	9.6
DS (Ds / max)	10.2
DBB (Db / max)	14.40
RR (R / max)	0.2
INFOTEXT (io)	website



CAAZZ_CAASZZ

CAD plugins

With our CAD integrations, you can use 3Dfindit directly in your CAD system and make your work easier with additional comfort functions, such as replacing a part and many more.

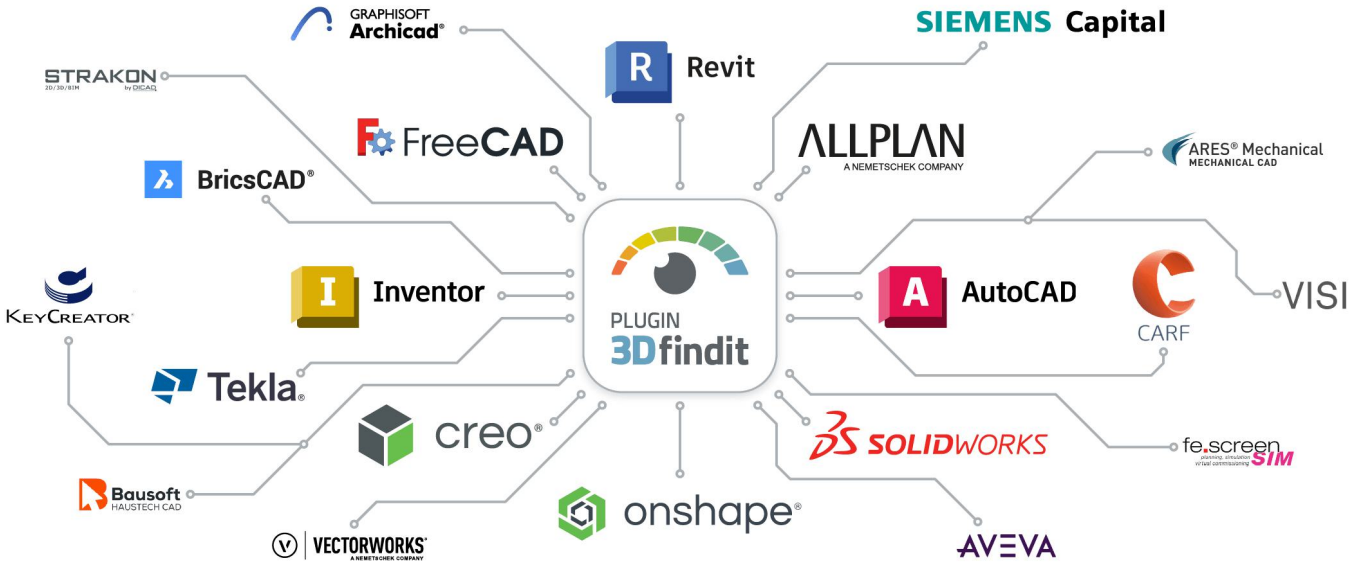

To the plugins