
WATER HYDRAULIC MOTORS / PRODUCT INFORMATION

M180 Water Hydraulic Motor

Review oil-free hydraulic components engineered around 316 stainless wetted materials, water-compatible wear interfaces, and real industrial pressure requirements.

Evaluate the M180 at the required starting torque and running speed. Use its displacement and performance data to confirm flow, pressure difference and drive behaviour; include case-drain limits, stopping and shaft-load requirements.

MB160-180W & MB160-225W

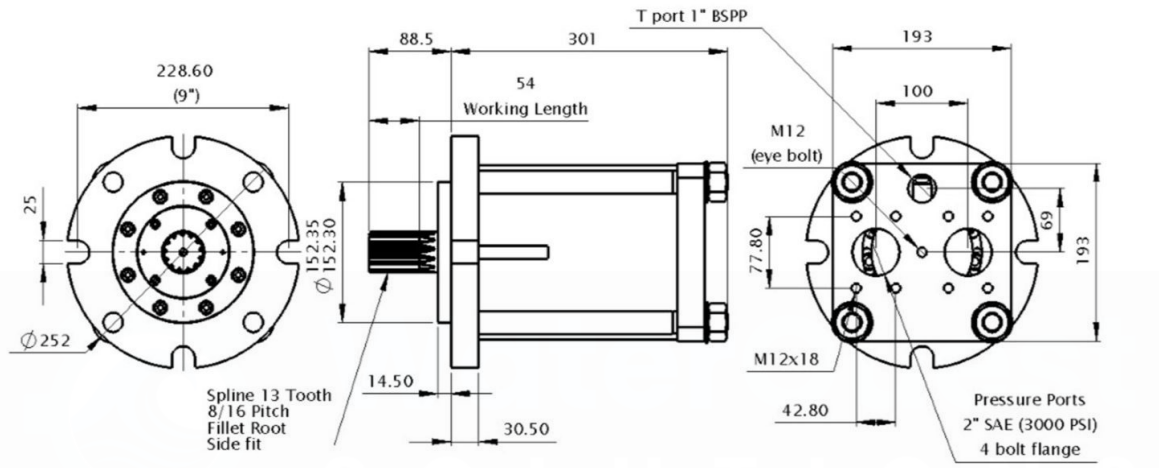

M180 Axial Piston Water Hydraulic Motor


Selection basis

Match the selected configuration to the working water, pressure, flow, temperature and duty. Maximum ratings and separate curve points do not establish one simultaneous operating point. Confirm installation and supplied configuration with WaterQuest Solutions.


Drawings and reference visuals

Dimensions, ports and curves are reproduced from the webpage visuals. Use the original drawing units and confirm the current approved drawing before fabrication or installation.


M180 Axial Piston Water Hydraulic Motor Output Power performance curve

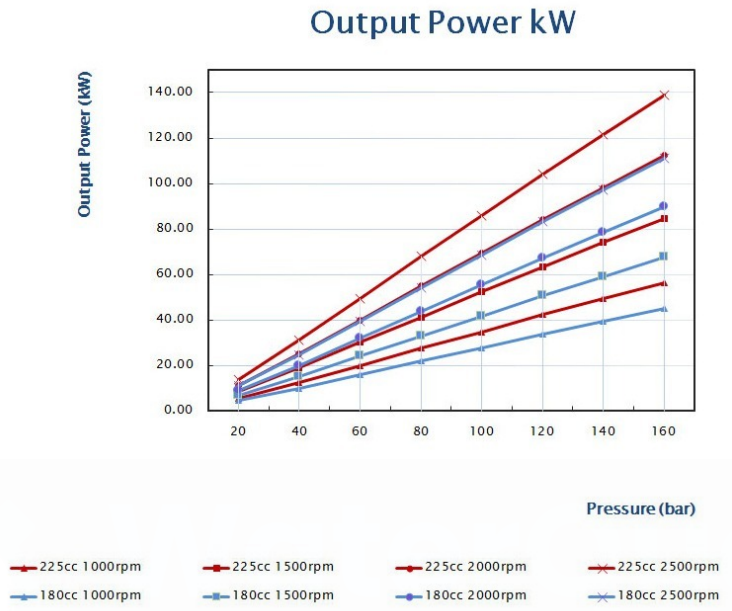


M180 Axial Piston Water Hydraulic Motor Input Flow performance curve

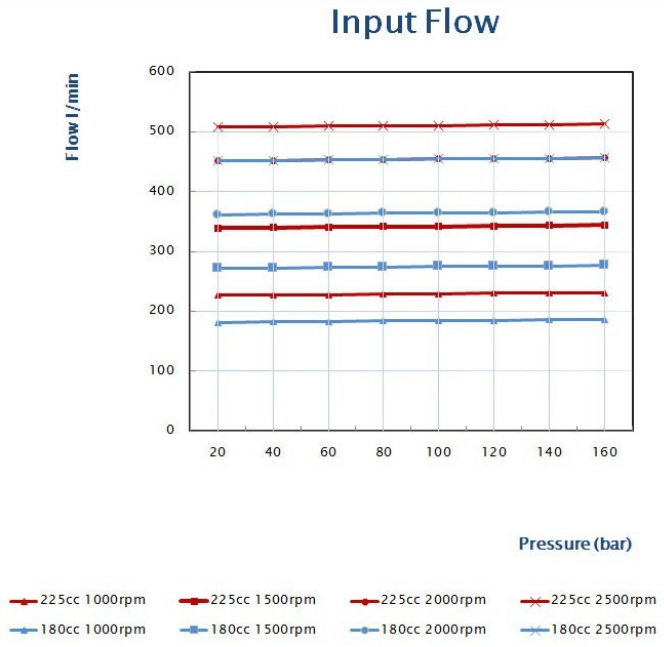

M180 Axial Piston Water Hydraulic Motor Output Torque performance curve

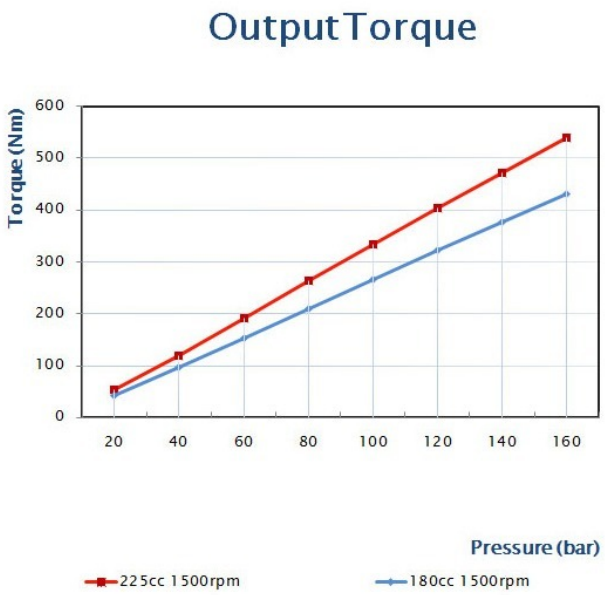

M180 Axial Piston Water Hydraulic Motor Overall Efficiency performance curve

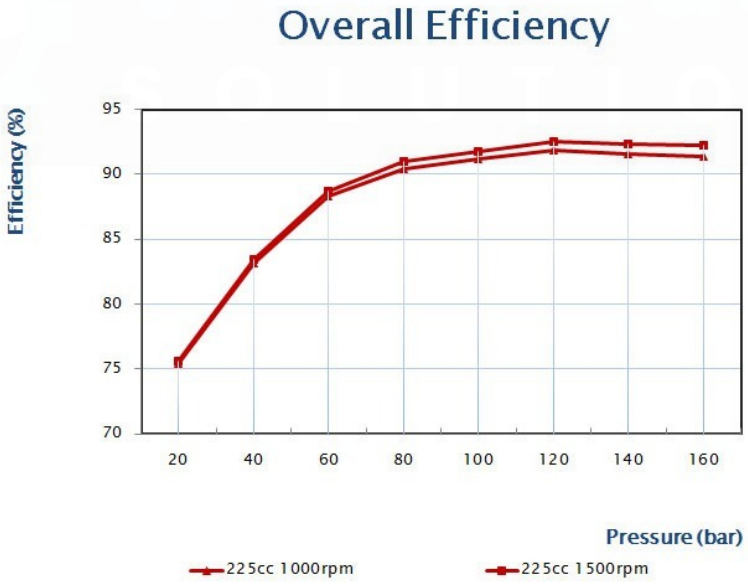

Application and specification

These charts use the supplied product data images for output power, input flow, output torque, and overall efficiency.

135.0 cc/rev (8.24 in³/rev) and 225 cc/rev (13.7 in³/rev) options support high torque demand while staying inside a water hydraulic architecture.

Built for clean hydraulic systems where water is the working medium and petroleum leakage is unacceptable.

Designed for boosted inlet operation with mechanical seal construction for larger system integration.

Appropriate for high-load equipment in marine, infrastructure, desalination, and industrial environments.

Oil-free rotary power for offshore equipment where water hydraulic actuation removes petroleum leakage risk.