WATER HYDRAULIC MOTORS / PRODUCT INFORMATION

M60 Water Hydraulic Motor

Review oil-free hydraulic components engineered around 316 stainless wetted materials, water-compatible wear interfaces, and real industrial pressure requirements.

Evaluate the M60 at the required starting torque and running speed. Use its displacement and performance data to confirm flow, pressure difference and drive behaviour; include case-drain limits, stopping and shaft-load requirements.



M60 Axial Piston Water Hydraulic Motor


Selection basis

Match the selected configuration to the working water, pressure, flow, temperature and duty. Maximum ratings and separate curve points do not establish one simultaneous operating point. Confirm installation and supplied configuration with WaterQuest Solutions.


Drawings and reference visuals

Dimensions, ports and curves are reproduced from the webpage visuals. Use the original drawing units and confirm the current approved drawing before fabrication or installation.


M60 Axial Piston Water Hydraulic Motor Output Power performance curve

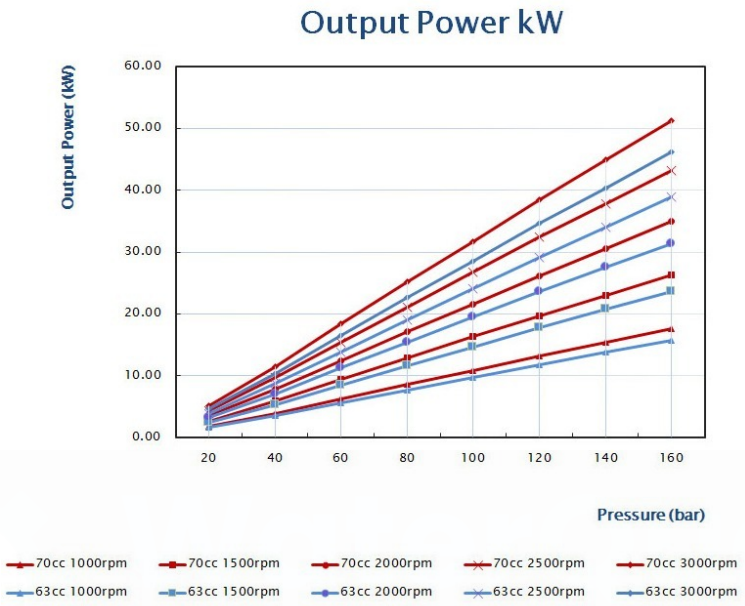


M60 Axial Piston Water Hydraulic Motor Input Flow performance curve

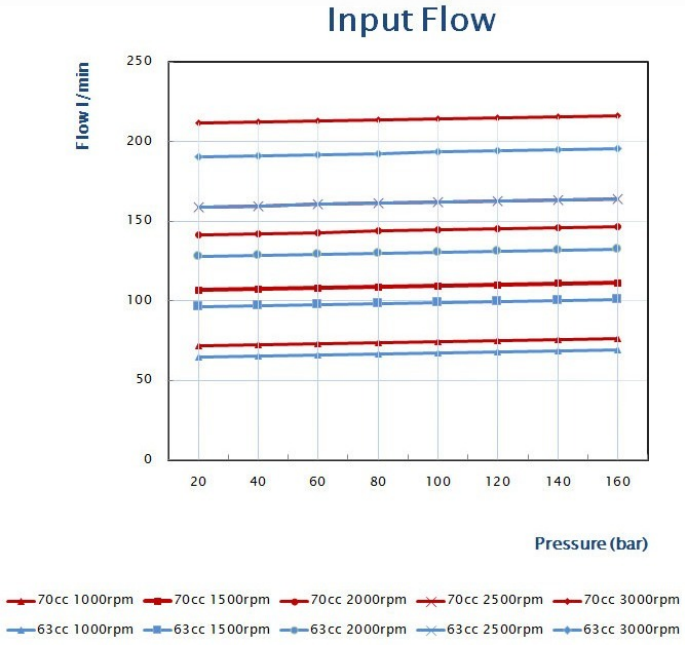

M60 Axial Piston Water Hydraulic Motor Output Torque performance curve

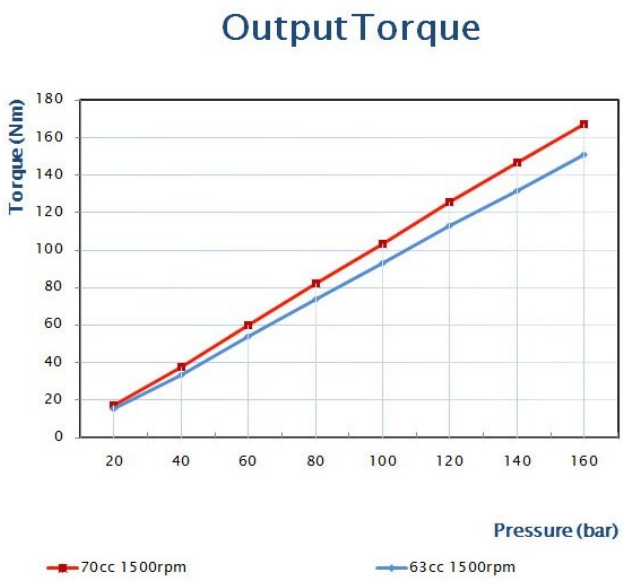

M60 Axial Piston Water Hydraulic Motor Overall Efficiency performance curve

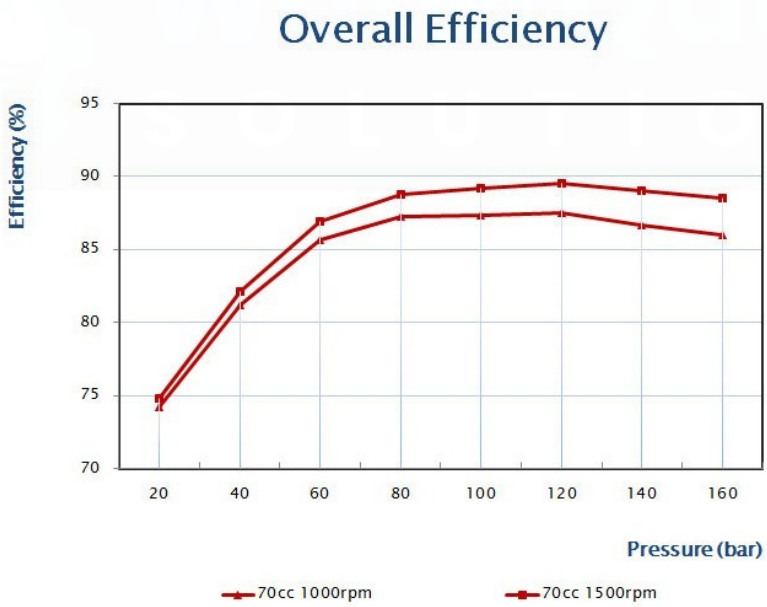

Application and specification

These charts use the supplied product data images for output power, input flow, output torque, and overall efficiency.

Designed around water as the hydraulic medium, not oil, so leakage does not create petroleum contamination in sensitive work areas.

63.0 cc/rev (3.84 in³/rev) and 70.3 cc/rev (4.29 in³/rev) options let engineers match torque and flow demand without changing the overall motor class.

Rated around 160 bar (2,321 psi) / 2320 PSI (160 bar (2,321 psi)) for demanding rotary actuation where compact hydraulic power is still required.

Suited to water hydraulic HPUs, deck equipment, process machinery, and other systems that need clean rotary motion.

Oil-free rotary power for marine deck equipment where water hydraulic actuation removes petroleum leakage risk.