WATER HYDRAULIC VALVES / PRODUCT INFORMATION

# 2/2 Pilot Valves

Compare DN9 and DN25 arrangements with the required normally open or normally closed function, pilot conditions and manifold layout.

Normally open and normally closed configurations are available in both sizes.




2/2 Pilot Valves - Product view

## Key operating parameters

| Parameter | Published value |
|---|---|
| Maximum inlet pressure | 160 bar (2,321 psi) |
| Operating pressure | 8-160 bar (116-2,321 psi) |
| DN9 / DN25 flow | 0-60 / 0-120 L/min (0-15.9 / 0-31.7 US gpm) |
| Feed galleries | DN9: 9 mm (0.354 in) / DN25: 20 mm (0.787 in) |
| Ports | DN9: " BSPP / DN25: 1" BSPP |

## Selection basis

Match the selected configuration to the working water, pressure, flow, temperature and duty. Maximum ratings and separate curve points do not establish one simultaneous operating point. Confirm installation and supplied configuration with WaterQuest Solutions.

# Technical data

| Parameter | Published value |
|---|---|
| Maximum inlet pressure | 160 bar (2,321 psi) |
| Operating pressure | 8-160 bar (116-2,321 psi) |
| DN9 / DN25 flow | 0-60 / 0-120 L/min (0-15.9 / 0-31.7 US gpm) |
| Feed galleries | DN9: 9 mm (0.354 in) / DN25: 20 mm (0.787 in) |
| Ports | DN9: " BSPP / DN25: 1" BSPP |
| Materials | AISI 316 stainless steel / polymer |
| Solenoid | 12 or 24 V DC |
| Fluid | Water filtered to 25 µm (984 µin) |
| Temperature | 1-50 °C (33.8-122 °F) |
| Dedicated manifolds | 1-5 stations; 316 stainless steel |

## 2/2 Pilot Valves - options

| Size / state | 12 V stand-alone | 24 V stand-alone | 12 V manifold | 24 V manifold |
|---|---|---|---|---|
| DN9 / closed | 226CASW | 226COSW | 2M26CASW | 2M26COSW |
| DN9 / open | 221CASW | 221COSW | 2M21CASW | 2M21COSW |
| DN25 / closed | 226FASW | 226FOSW | 2M26FASW | 2M26FOSW |
| DN25 / open | 221FASW | 221FOSW | 2M21FASW | 2M21FOSW |

## Dedicated pilot-valve manifolds

| Stations | DN9 block | DN9 A / B | DN25 block | DN25 A / B |
|---|---|---|---|---|
| 1 | 500-009 | 95 / 80 mm (3.74 / 3.15 in) | 500-023 | 100 / 90 mm (3.94 / 3.54 in) |
| 2 | 500-010 | 145 / 130 mm (5.71 / 5.12 in) | 500-024 | 155 / 145 mm (6.1 / 5.71 in) |
| 3 | 500-011 | 195 / 180 mm (7.68 / 7.09 in) | 500-025 | 210 / 200 mm (8.27 / 7.87 in) |
| 4 | 500-012 | 245 / 230 mm (9.65 / 9.06 in) | 500-026 | 265 / 255 mm (10.4 / 10 in) |
| 5 | 500-005 | 295 / 280 mm (11.6 / 11 in) | 500-027 | 320 / 310 mm (12.6 / 12.2 in) |


## Selection and integration

Selection considerations Confirm the required pressure differential, pilot arrangement and manifold layout before selection. Discuss your application


# Drawings and reference visuals

Dimensions, ports and curves are reproduced from the webpage visuals. Use the original drawing units and confirm the current approved drawing before fabrication or installation.


## 2/2 Pilot Valves - Flow characteristics

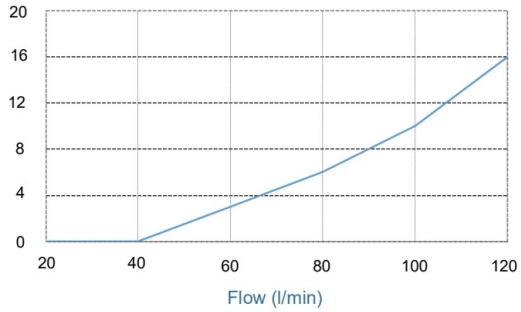



**J9 Fully opened pressure drop against flow rates**

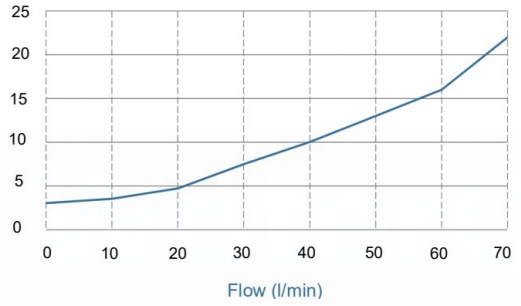


## 2/2 Pilot Valves - DN9 dimensions

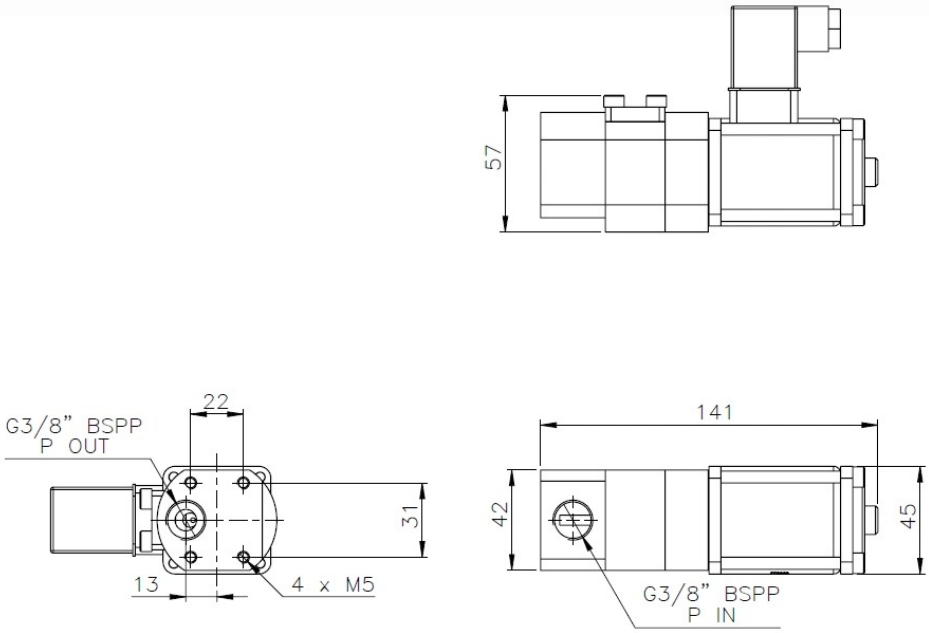

## 2/2 Pilot Valves - DN25 dimensions

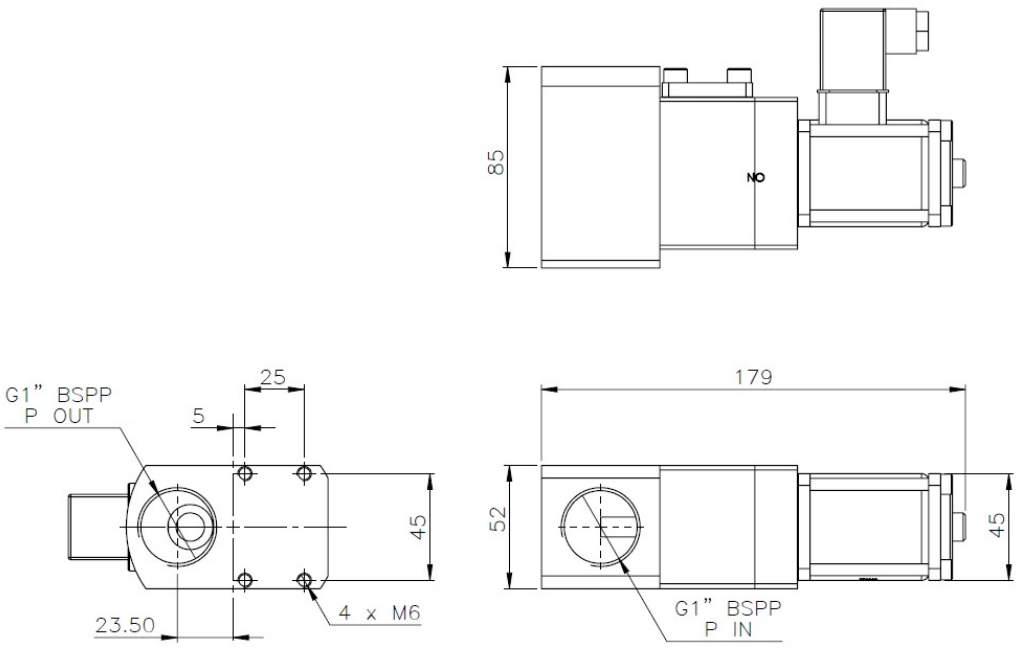


## 2/2 Pilot Valves - Manifold dimensions

