WATER HYDRAULIC VALVES / PRODUCT INFORMATION

Pressure-Compensated Flow Control Valve

Check the available differential pressure and the expected load variation. Compensation has operating limits; verify flow stability at the least favourable circuit condition.

Explore the dimensions, connections and performance information for this range. Select any image for a closer look.



Pressure-Compensated Flow Control Valve - Product view

Key operating parameters

Parameter	Published value
Operating pressure	5-160 bar (72.5-2,321 psi)
DN3 / DN6 flow	0.5-5 / 3-30 L/min (0.132-1.32 / 0.793-7.93 US gpm)
Maximum Cv	DN3: 0.2 / DN6: 0.7
Feed galleries	3 mm (0.118 in) / 6 mm (0.236 in)
Ports	¼" BSPP

Selection basis

Match the selected configuration to the working water, pressure, flow, temperature and duty. Maximum ratings and separate curve points do not establish one simultaneous operating point. Confirm installation and supplied configuration with WaterQuest Solutions.

Technical data

Parameter	Published value
Operating pressure	5-160 bar (72.5-2,321 psi)
DN3 / DN6 flow	0.5-5 / 3-30 L/min (0.132-1.32 / 0.793-7.93 US gpm)
Maximum Cv	DN3: 0.2 / DN6: 0.7
Feed galleries	3 mm (0.118 in) / 6 mm (0.236 in)
Ports	¼" BSPP
Materials	316 stainless steel / polymer
Fluid	Tap water
Adjustment travel	DN3: 5 turns / DN6: 6 turns
Adjustment	Hex-key setting with locking provision

Pressure-Compensated Flow Control Valve - options

Size	Order code	Flow range	Adjustment travel
DN3	216AXSW	0.5-5 L/min (0.132-1.32 US gpm)	5 turns
DN6	216BXSW	3-30 L/min (0.793-7.93 US gpm)	6 turns


Selection and integration


Selection considerations Maintain adequate pressure differential for regulation. The displayed curves use a 130 bar (1,885 psi) inlet/relief setting. Discuss your application

Drawings and reference visuals

Dimensions, ports and curves are reproduced from the webpage visuals. Use the original drawing units and confirm the current approved drawing before fabrication or installation.

Pressure-Compensated Flow Control Valve - Flow characteristics

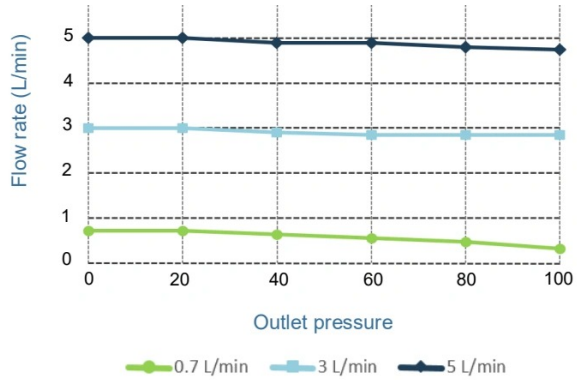


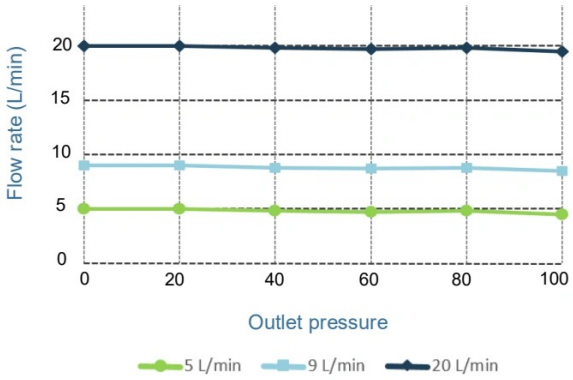

nlet pressure/ Relief setting 130 bar
Minimum operating pressure 5 bar

Pressure-Compensated Flow Control Valve - DN3 dimensions

16AXSW

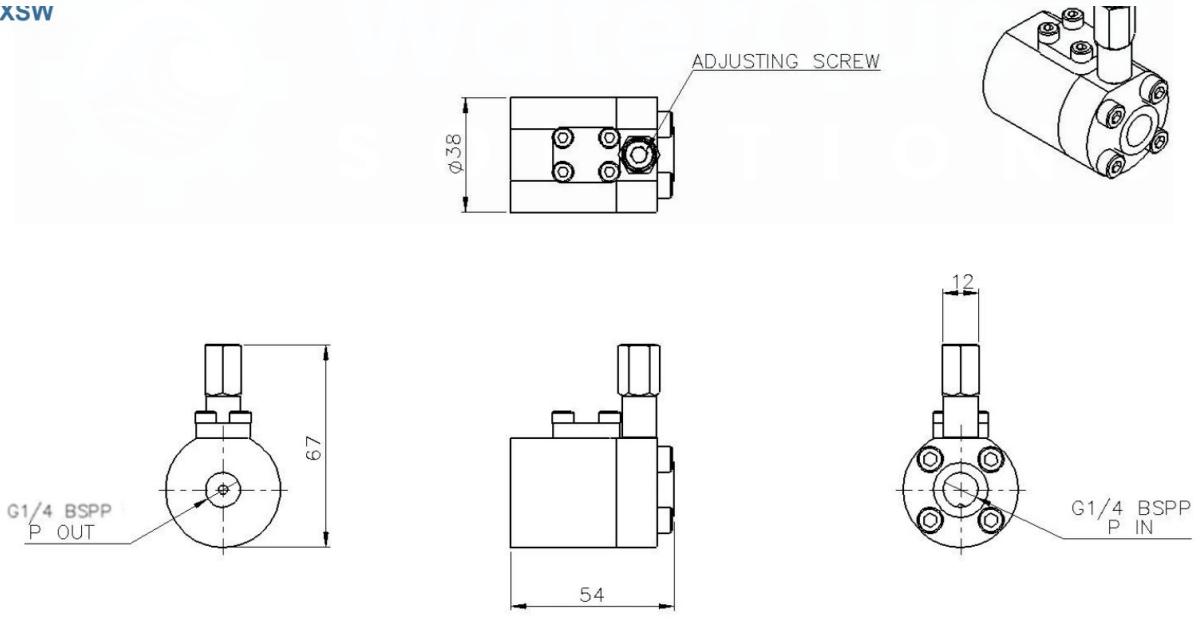

Pressure-Compensated Flow Control Valve - DN6 dimensions

