
POWER CENTRE REVERSE OSMOSIS / PRODUCT INFORMATION

PC300: feed pumping and brine energy recovery

Compare the PC300 configuration at the required RO feed flow, pressure and recovery. Check feed and brine paths, motor input and any booster duty together; reference curves do not guarantee membrane-system production.

A seawater RO power centre that combines an axial piston pump with an energy recovery motor, using pressure in the reject brine to help drive the pump. Production capacity up to 390 m³/day (103,027 US gal/day).

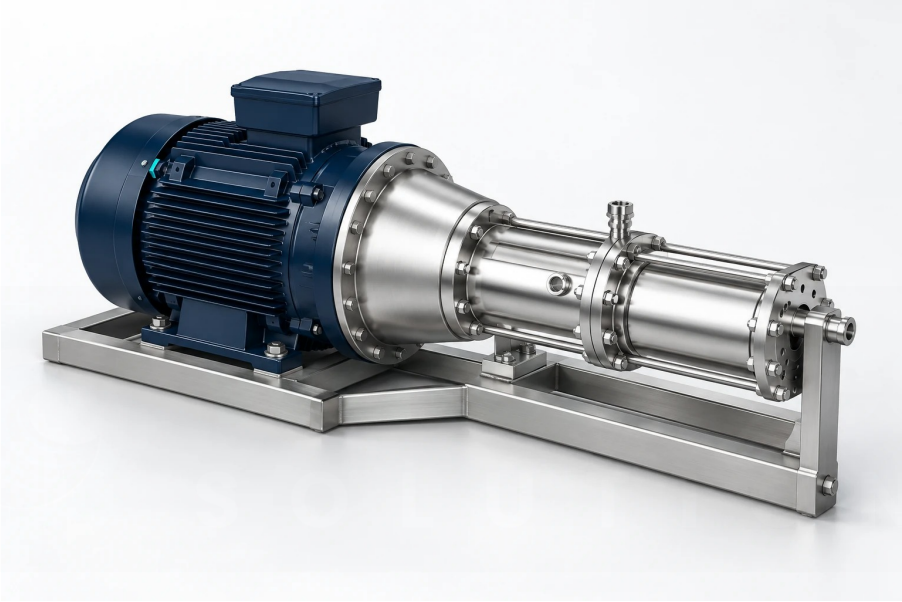

Recreated illustration of the PC300 Power Centre: electric motor, high-pressure pump, integrated energy recovery motor and mounting frame

Key operating parameters

Parameter	Published value
Configuration	Axial piston pump + integrated energy recovery motor
Housing, shaft and pistons	Duplex stainless steel
Operating medium	Sea / salt water
Maximum production	Up to 390 m³/day (103,027 US gal/day)
Operating pressure	30-85 bar (435-1,233 psi) listed; confirm upper limit

Selection basis

Match the selected configuration to the working water, pressure, flow, temperature and duty. Maximum ratings and separate curve points do not establish one simultaneous operating point. Confirm installation and supplied configuration with WaterQuest Solutions.

Technical data

Parameter	Published value
Configuration	Axial piston pump + integrated energy recovery motor
Housing, shaft and pistons	Duplex stainless steel
Operating medium	Sea / salt water
Maximum production	Up to 390 m³/day (103,027 US gal/day)
Operating pressure	30-85 bar (435-1,233 psi) listed; confirm upper limit
Minimum inlet pressure	3.5 bar (50.8 psi) at pressure switch port
Maximum operating temperature	50 °C (122 °F)
Shaft speed	Confirm operating speed
Mounting	Horizontal; support rear of unit
Drive connection	Splined shaft and flexible gear coupling
Power rating	Duty dependent - see performance curves
Filtration requirement	Confirm micron rating and water-quality limits

PC300 connections · Technical reference p. 9

Port	Function	Connection
A	Low-pressure out - energy recovery motor	2" SAE 4-bolt flange, 3,000 psi (207 bar (3,002 psi)) class
B	Low-pressure in - pump	2" SAE 4-bolt flange, 3,000 psi (207 bar (3,002 psi)) class
C	High-pressure in - energy recovery motor	2" SAE 4-bolt flange, 3,000 psi (207 bar (3,002 psi)) class
D	High-pressure out - pump	2" SAE 4-bolt flange, 3,000 psi (207 bar (3,002 psi)) class
E	Case drain - pump	¾" BSPP female
F	Case drain - energy recovery motor	¾" BSPP female
G	Inlet pressure switch	G¼" BSPP female

PC300 recovery & ordering references

Recovery	Order code
25%	Confirm
30%	Confirm
35%	708-001
40%	769-001
45%	762-001
50%	770-001
55%	Confirm


Selection and integration

Engineering checks Confirm before selection Pressure rating. The specification table lists 85 bar (1,233 psi) maximum; the circuit description states 80 bar (1,160 psi). Confirm the approved maximum for the selected unit. Shaft speed. The installation text and circuit table specify up to 1,250 rpm; the flow and production curves extend to 1,750 rpm. Confirm the permitted shaft speed for your configuration. Recovery options. 35-50% have listed ordering codes. Curves include 25%, 30% and 55%; their order codes are not supplied. Production and power. Confirm duty at your feed salinity, temperature, membrane selection, recovery and operating hours.


Drawings and reference visuals

Dimensions, ports and curves are reproduced from the webpage visuals. Use the original drawing units and confirm the current approved drawing before fabrication or installation.


Process diagram: filtered feed enters the high-pressure pump, the RO membrane produces fresh water, and reject brine returns through the energy recovery motor to assist the shared drive.

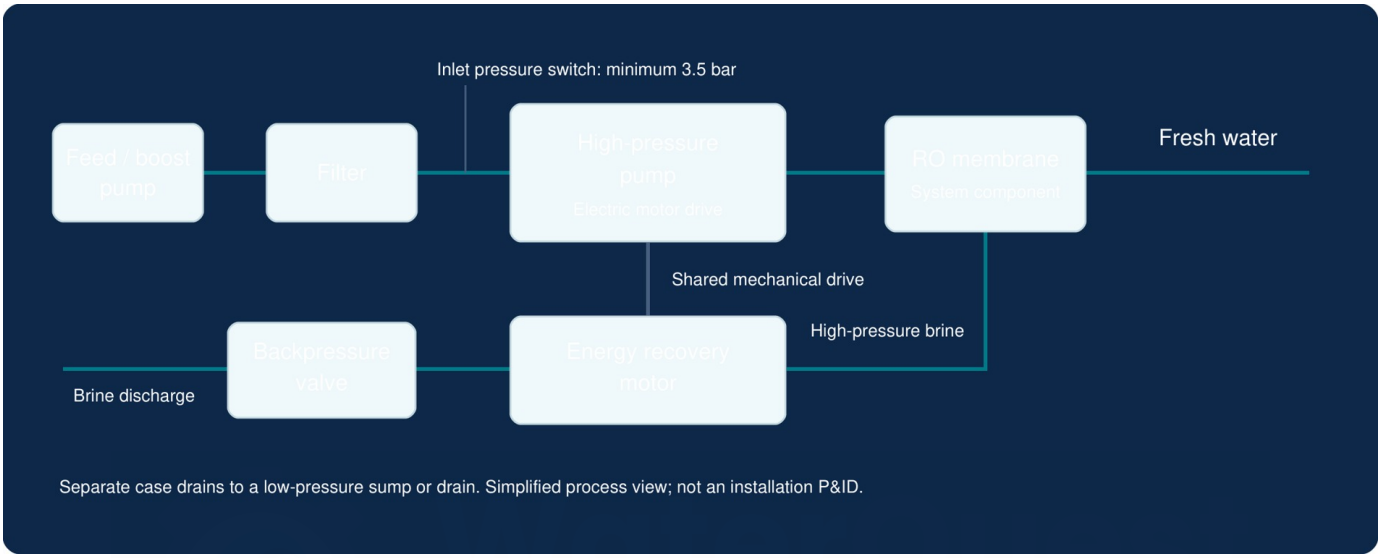


PC300 pump output flow chart, m³/h. Flow varies with shaft speed and operating conditions.

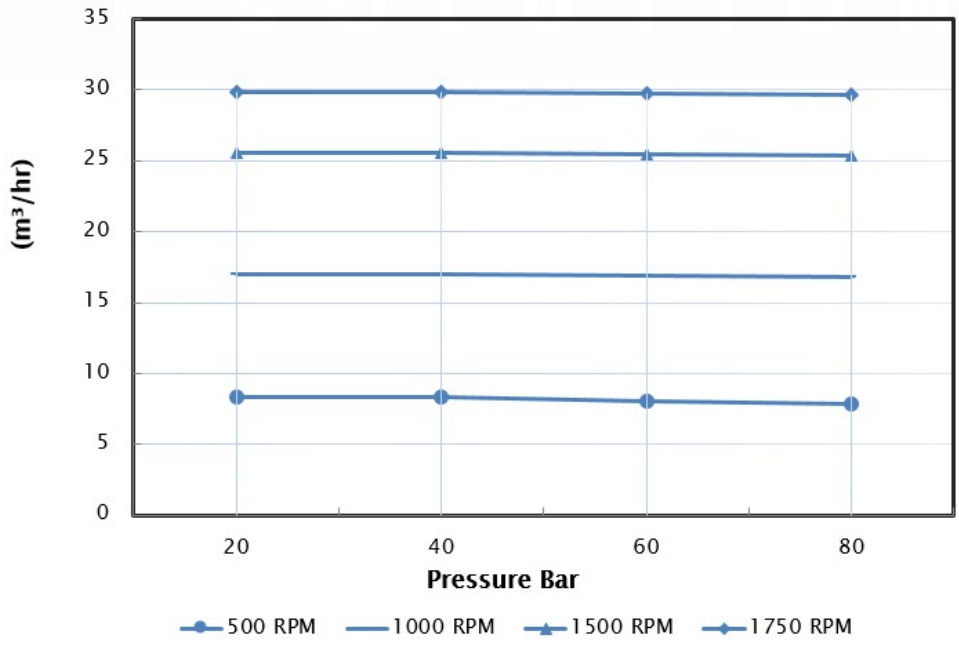


PC300 pump output flow chart, m³/day. Flow varies with shaft speed and operating conditions.

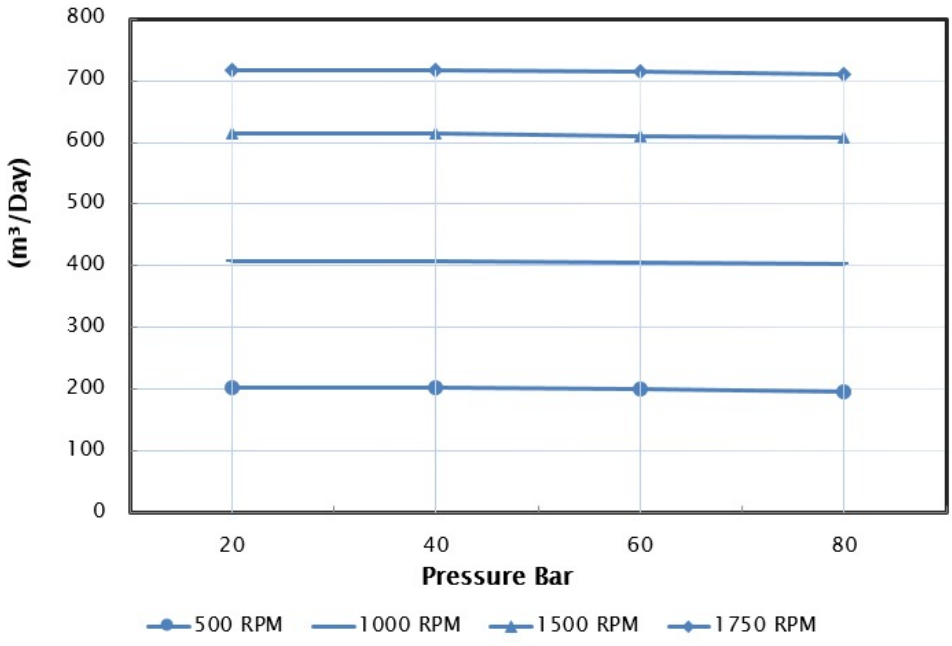


PC300 freshwater production chart, m³/h. At 80 bar; recovery selected when ordering.

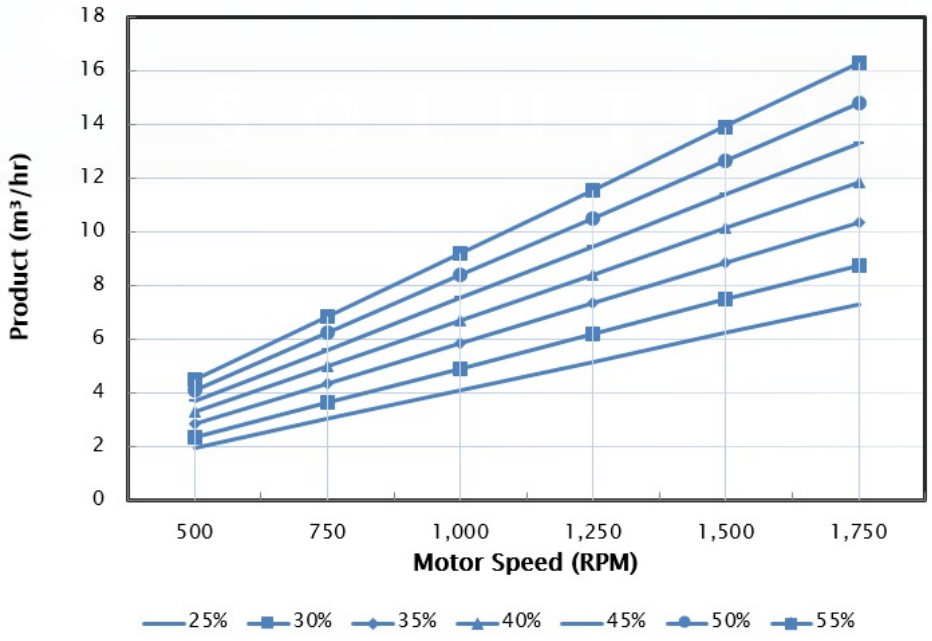


PC300 freshwater production chart, m³/day. At 80 bar; recovery selected when ordering.

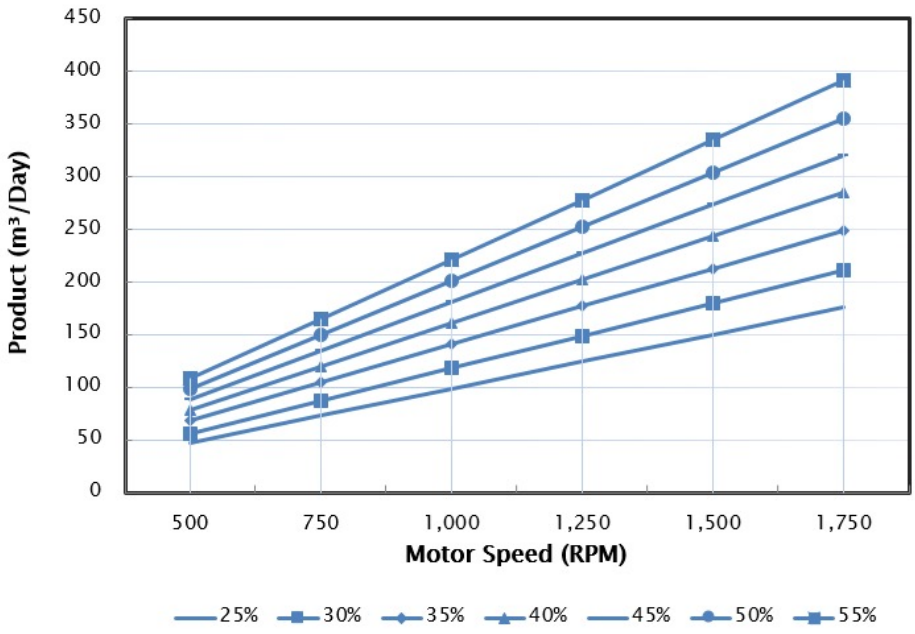


PC300 specific energy chart, Chart units: kW/m³. Performance curves at 1,500 rpm.

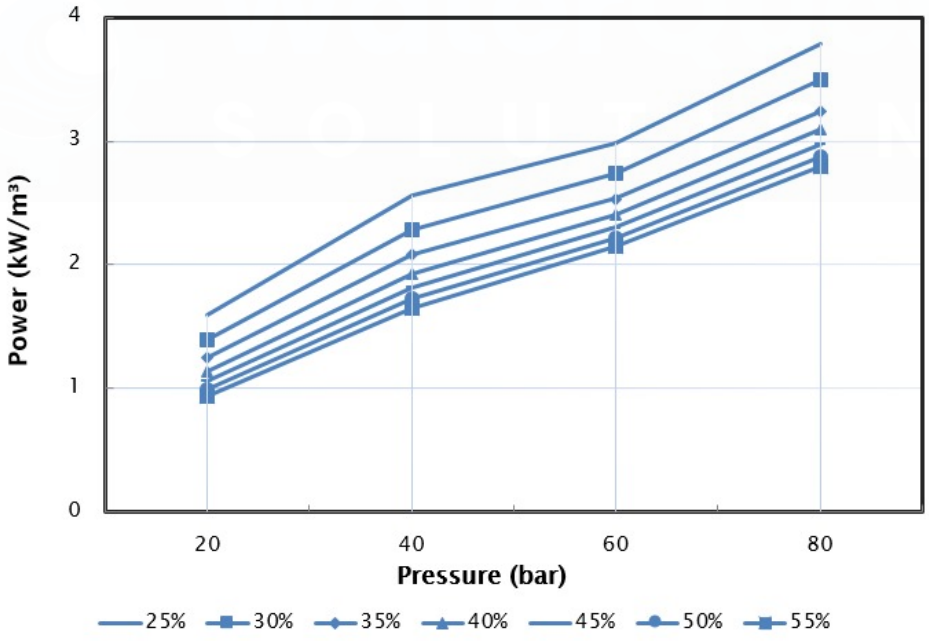


PC300 input power chart, kW. Performance curves at 1,500 rpm.

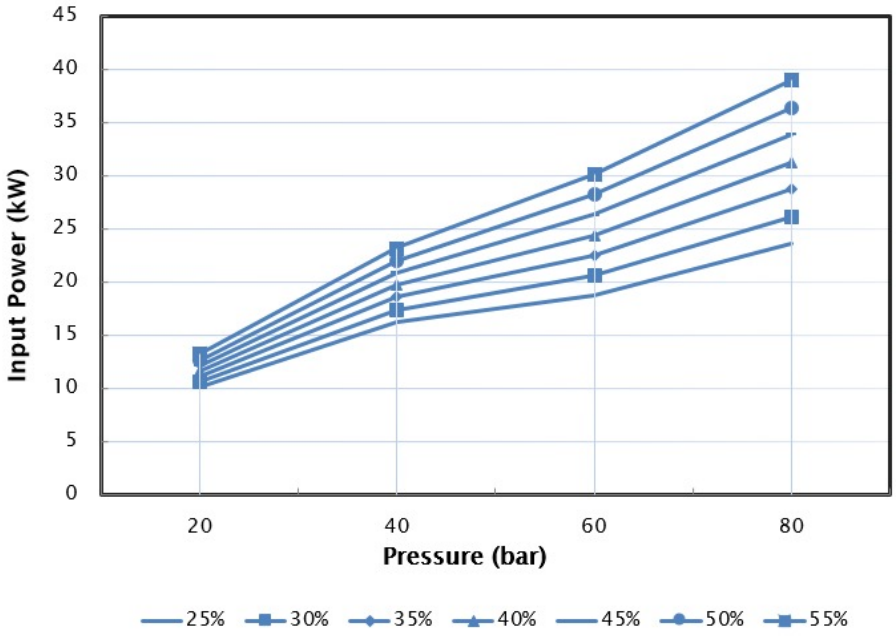

PC300 dimensioned unit drawing with port positions; open full-size for dimensions

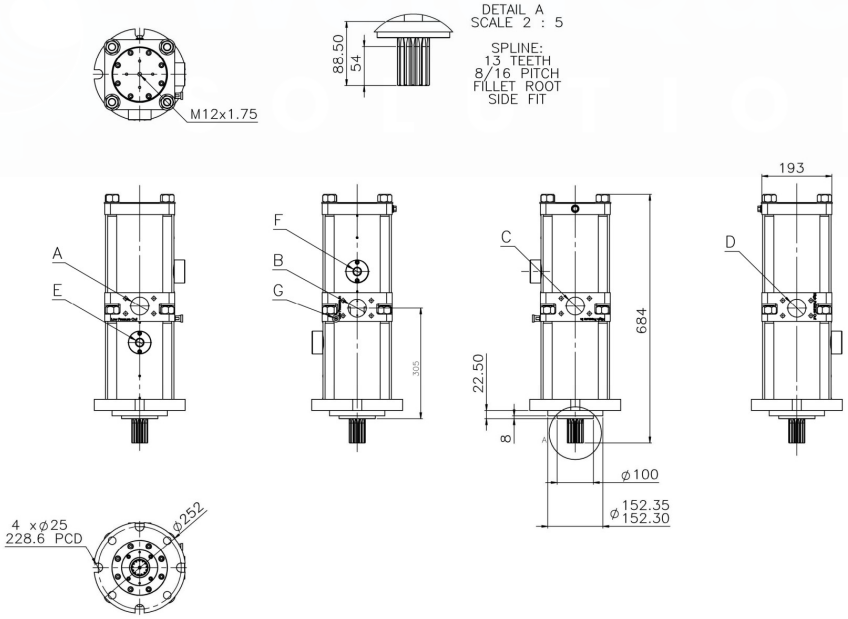

PC300 motor, coupling, Power Centre and mounting frame assembly drawing

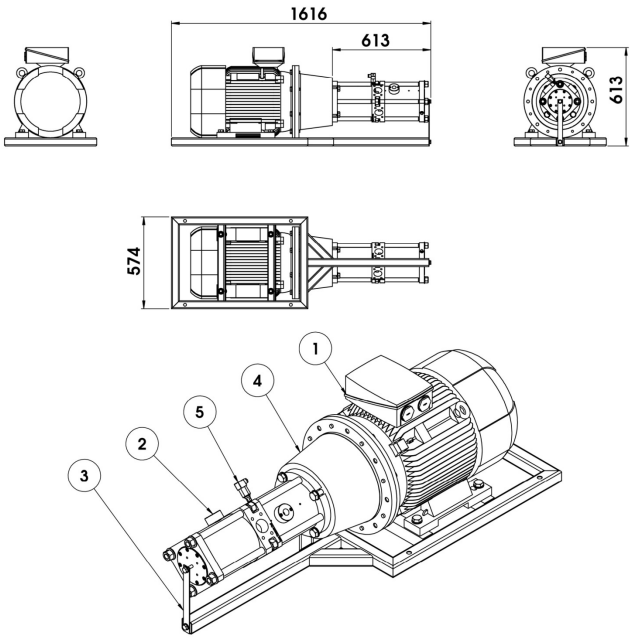

PC300 circuit schematic

