WATER HYDRAULIC MOTORS / PRODUCT INFORMATION

M15 Water Hydraulic Motor

Evaluate the M15 at the required starting torque and running speed. Use its displacement and performance data to confirm flow, pressure difference and drive behaviour; include case-drain limits, stopping and shaft-load requirements.

Verified test data for 15cc (0.915 in³) and 19cc (1.16 in³) displacement variants across full operating envelope. All curves measured on tap water at 20°C (68 °F) ambient.



M15 Water Hydraulic Motor

Selection basis

Match the selected configuration to the working water, pressure, flow, temperature and duty. Maximum ratings and separate curve points do not establish one simultaneous operating point. Confirm installation and supplied configuration with WaterQuest Solutions.

Technical data

Specifications and selection data

Parameter	Dimension
Flange Diameter	Ø114 mm
Bolt Circle	106.2 - 106.5 mm (4.19 in)
Mounting Bolts	4× M8 (KEY 6×6)
Shaft Diameter	Ø18.97 - 18.99 mm (0.748 in)
Overall Length	145 mm (5.71 in)
Height	89 mm (3.5 in)
Pressure Ports	G3/4 BSPP
Tank Port (MB)	G1/2 BSPP
Dry Weight	~8.5 kg (18.7 lb)


Selection and integration

Reference Engineering Calculators Reference Technical Glossary


Performance curves

Reference curves reproduced from the product webpage. Curves retain the published data points and speed/displacement labels. Confirm guaranteed performance at the selected duty.


Efficiency (%) vs Pressure (bar)

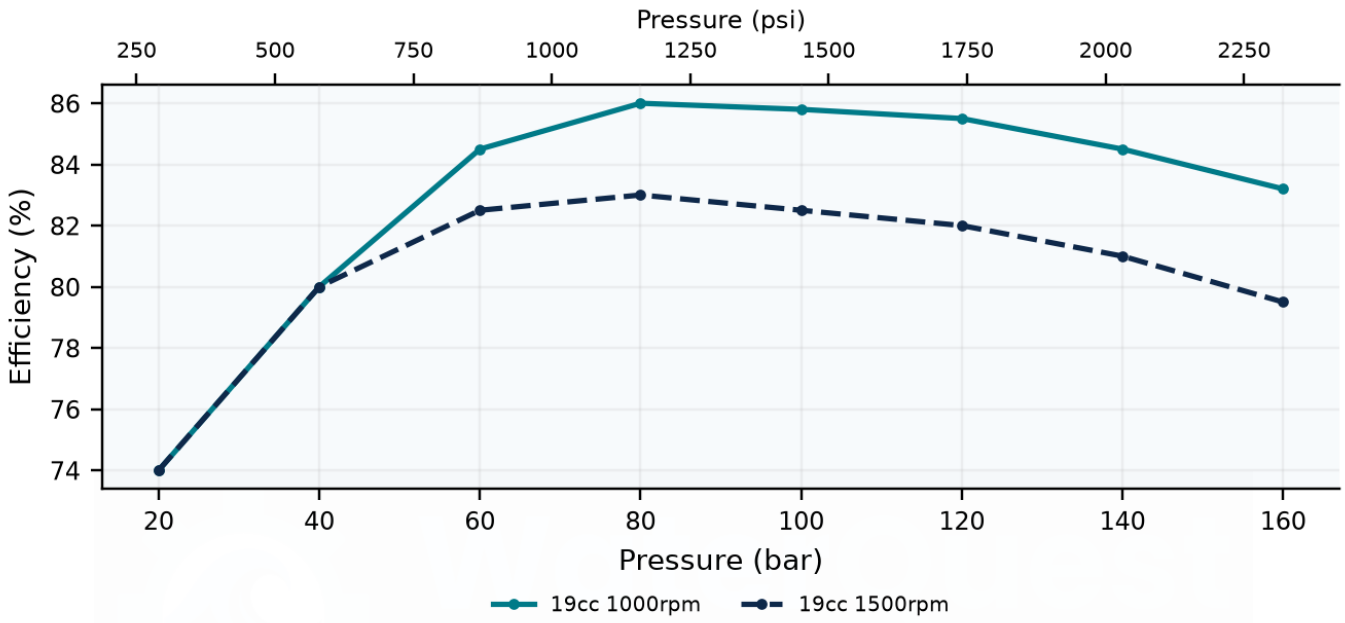

Flow (L/min) vs Pressure (bar)

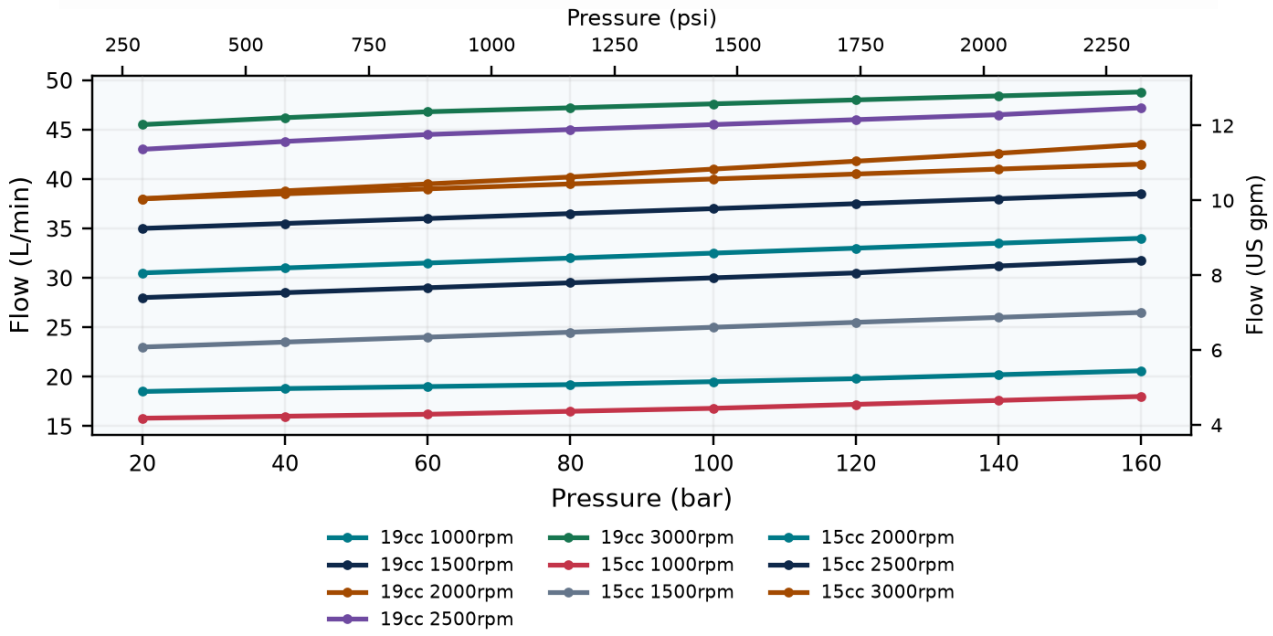

Output Power (kW) vs Pressure (bar)

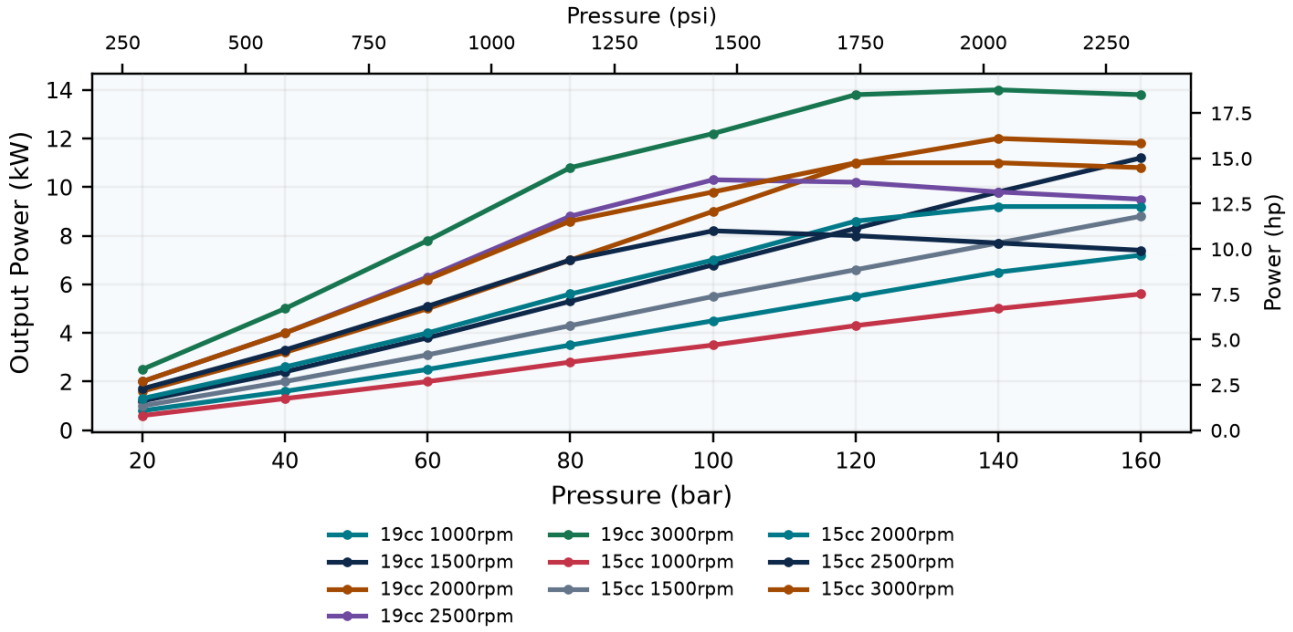

Torque (Nm) vs Pressure (bar)

