
WATER HYDRAULIC VALVES / PRODUCT INFORMATION

2/2 Directional Valve

Match the on/off duty to flow, differential pressure and the required response when the actuator supply is removed.

Cartridge construction supports multiple functions in a single manifold block.

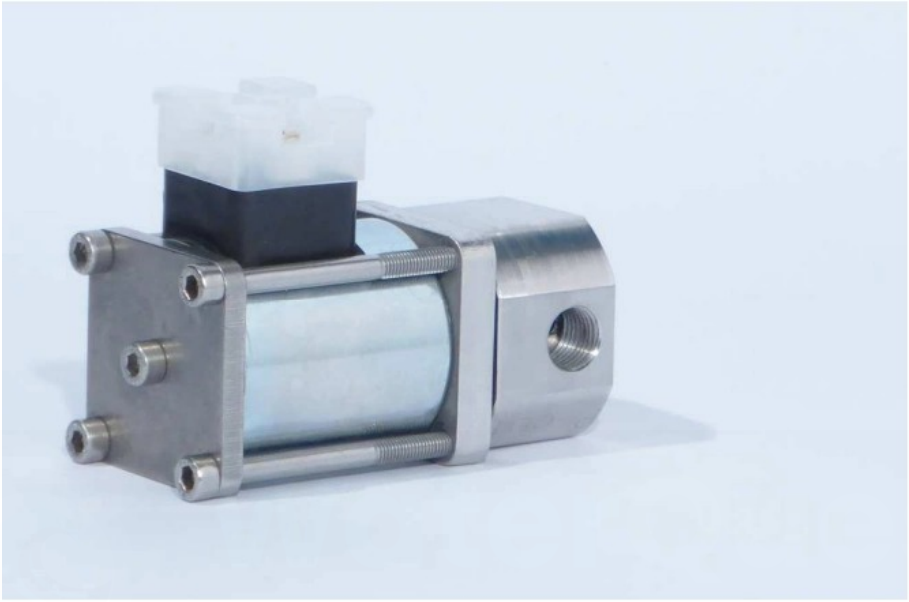

2/2 Directional Valve - Product view

Key operating parameters

Parameter	Published value
Maximum inlet pressure	160 bar (2,321 psi)
Operating pressure	8-160 bar (116-2,321 psi)
Flow range	0-10 L/min (0-2.64 US gpm)
Flow coefficient	Cv 0.15 / Kv 0.13
Feed gallery	2.5 mm (0.0984 in)

Selection basis

Match the selected configuration to the working water, pressure, flow, temperature and duty. Maximum ratings and separate curve points do not establish one simultaneous operating point. Confirm installation and supplied configuration with WaterQuest Solutions.

Technical data

Parameter	Published value
Maximum inlet pressure	160 bar (2,321 psi)
Operating pressure	8-160 bar (116-2,321 psi)
Flow range	0-10 L/min (0-2.64 US gpm)
Flow coefficient	Cv 0.15 / Kv 0.13
Feed gallery	2.5 mm (0.0984 in)
Ports	¼" BSPP
Materials	AISI 316 stainless steel / polymer
Solenoid	12 or 24 V DC
Fluid	Water filtered to 25 µm (984 µin)
Temperature	1-50 °C (33.8-122 °F)

2/2 Directional Valve - options

Rest position	12 V DC	24 V DC
Normally closed	226AASW	226AOSW
Normally open	221AASW	221AOSW

Selection and integration

Selection considerations Port orientation changes with the selected spring condition. Use a pilot-operated valve when greater flow capacity is required. Discuss your application

Drawings and reference visuals

Dimensions, ports and curves are reproduced from the webpage visuals. Use the original drawing units and confirm the current approved drawing before fabrication or installation.

2/2 Directional Valve - Dimensions

