WATER HYDRAULIC VALVES / PRODUCT INFORMATION

2/2 Pilot Valves

Compare DN9 and DN25 arrangements with the required normally open or normally closed function, pilot conditions and manifold layout.

Normally open and normally closed configurations are available in both sizes.



2/2 Pilot Valves - Product view

Key operating parameters

Parameter	Published value
Maximum inlet pressure	160 bar (2,321 psi)
Operating pressure	8-160 bar (116-2,321 psi)
DN9 / DN25 flow	0-60 / 0-120 L/min (0-15.9 / 0-31.7 US gpm)
Feed galleries	DN9: 9 mm (0.354 in) / DN25: 20 mm (0.787 in)
Ports	DN9: " BSPP / DN25: 1" BSPP

Selection basis

Match the selected configuration to the working water, pressure, flow, temperature and duty. Maximum ratings and separate curve points do not establish one simultaneous operating point. Confirm installation and supplied configuration with WaterQuest Solutions.

Technical data

Parameter	Published value
Maximum inlet pressure	160 bar (2,321 psi)
Operating pressure	8-160 bar (116-2,321 psi)
DN9 / DN25 flow	0-60 / 0-120 L/min (0-15.9 / 0-31.7 US gpm)
Feed galleries	DN9: 9 mm (0.354 in) / DN25: 20 mm (0.787 in)
Ports	DN9: " BSPP / DN25: 1" BSPP
Materials	AISI 316 stainless steel / polymer
Solenoid	12 or 24 V DC
Fluid	Water filtered to 25 µm (984 µin)
Temperature	1-50 °C (33.8-122 °F)
Dedicated manifolds	1-5 stations; 316 stainless steel

2/2 Pilot Valves - options

Size / state	12 V stand-alone	24 V stand-alone	12 V manifold	24 V manifold
DN9 / closed	226CASW	226COSW	2M26CASW	2M26COSW
DN9 / open	221CASW	221COSW	2M21CASW	2M21COSW
DN25 / closed	226FASW	226FOSW	2M26FASW	2M26FOSW
DN25 / open	221FASW	221FOSW	2M21FASW	2M21FOSW

Dedicated pilot-valve manifolds

Stations	DN9 block	DN9 A / B	DN25 block	DN25 A / B
1	500-009	95 / 80 mm (3.74 / 3.15 in)	500-023	100 / 90 mm (3.94 / 3.54 in)
2	500-010	145 / 130 mm (5.71 / 5.12 in)	500-024	155 / 145 mm (6.1 / 5.71 in)
3	500-011	195 / 180 mm (7.68 / 7.09 in)	500-025	210 / 200 mm (8.27 / 7.87 in)
4	500-012	245 / 230 mm (9.65 / 9.06 in)	500-026	265 / 255 mm (10.4 / 10 in)
5	500-005	295 / 280 mm (11.6 / 11 in)	500-027	320 / 310 mm (12.6 / 12.2 in)


Selection and integration

Selection considerations Confirm the required pressure differential, pilot arrangement and manifold layout before selection. Discuss your application


Drawings and reference visuals

Dimensions, ports and curves are reproduced from the webpage visuals. Use the original drawing units and confirm the current approved drawing before fabrication or installation.


2/2 Pilot Valves - Flow characteristics

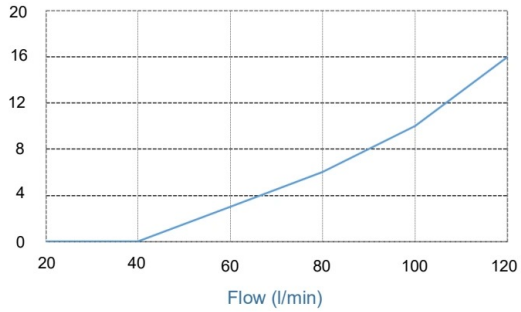


J9 Fully opened pressure drop against flow rates

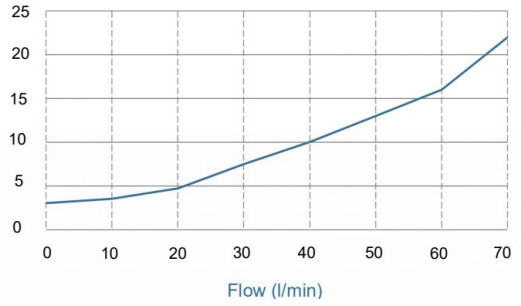

2/2 Pilot Valves - DN9 dimensions

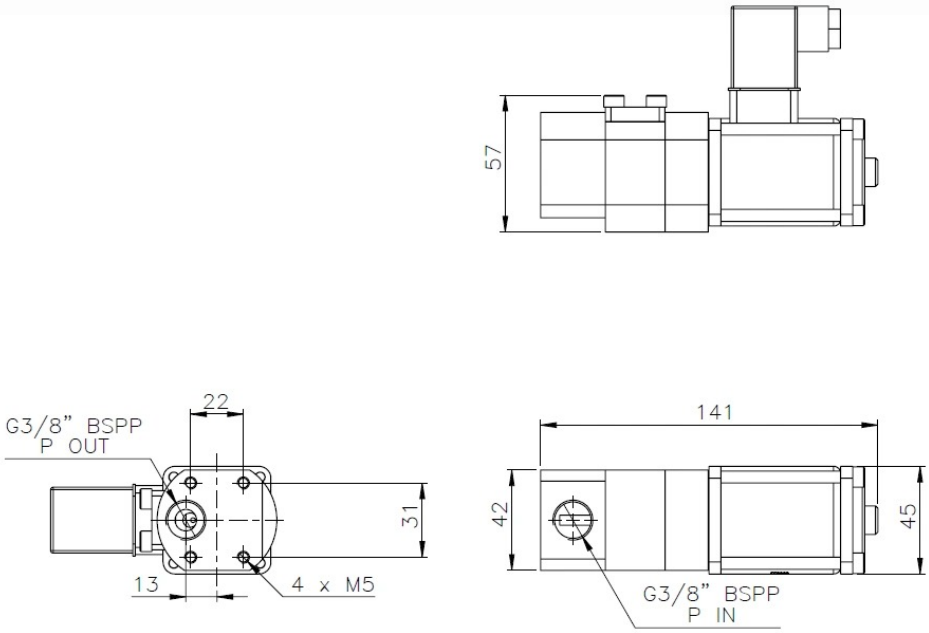

2/2 Pilot Valves - DN25 dimensions

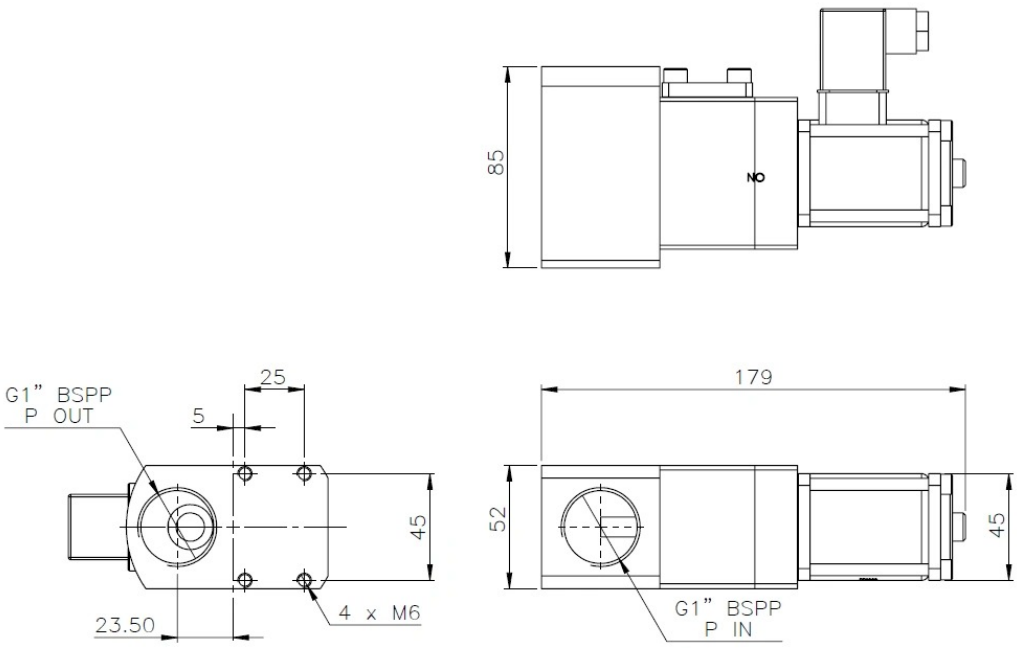

2/2 Pilot Valves - Manifold dimensions

