WATER HYDRAULIC VALVES / PRODUCT INFORMATION

4/3 Directional Control Valves

Select the spool or flow-path arrangement against the actuator’s movement, holding and unloading requirements. Confirm the behaviour of all ports in every position.

Select closed P with A/B/T connected or an open centre with all ports connected.

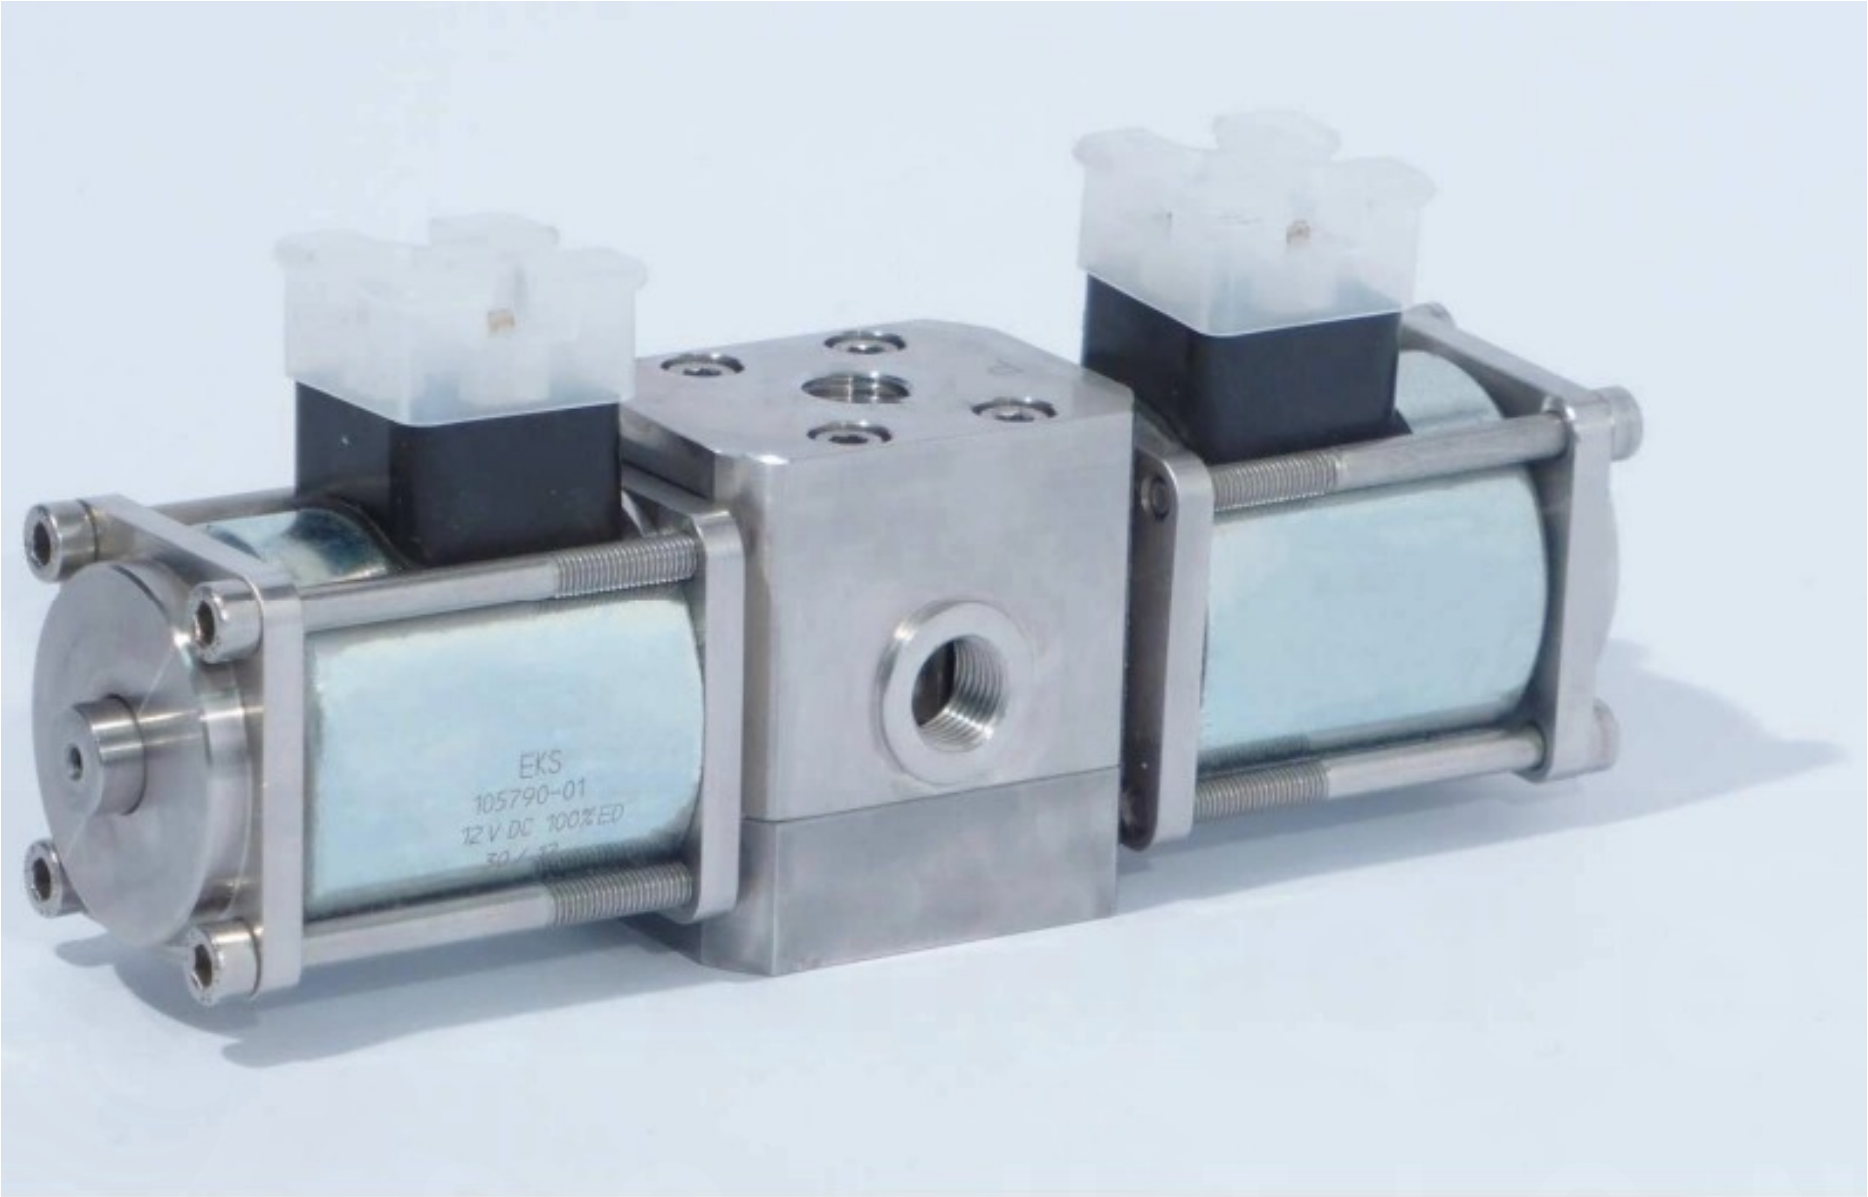

4/3 Directional Control Valves - Product view

SOLUTIONS

Key operating parameters

Parameter	Published value
Maximum inlet pressure	160 bar (2,321 psi)
Operating pressure	0-160 bar (0-2,321 psi)
Flow range	0-30 L/min (0-7.93 US gpm)
Flow coefficient	Cv 0.62 / Kv 0.75
Feed gallery	6 mm (0.236 in)

Selection basis

Match the selected configuration to the working water, pressure, flow, temperature and duty. Maximum ratings and separate curve points do not establish one simultaneous operating point. Confirm installation and supplied configuration with WaterQuest Solutions.

Technical data

Parameter	Published value
Maximum inlet pressure	160 bar (2,321 psi)
Operating pressure	0-160 bar (0-2,321 psi)
Flow range	0-30 L/min (0-7.93 US gpm)
Flow coefficient	Cv 0.62 / Kv 0.75
Feed gallery	6 mm (0.236 in)
Ports	¼" BSPP
Materials	AISI 316 stainless steel / polymer
Solenoid system	24 V DC
Electrical connections	Spade or Hirschmann
Fluid	Water

4/3 Directional Control Valves - options

Centre function	Stand-alone	Manifold	CETOP 3
Closed P; A/B/T connected	206BBSW	2M06BBSW	2C06BBSW
All ports connected	212BBSW	2M12BBSW	2C12BBSW

Selection and integration

Selection considerations Confirm pressure, temperature, connection and sealing requirements for the actual duty, then verify installation and leak tightness through the specified acceptance procedure. For solenoid actuation above 20 bar (290 psi), use actuation card 004-010. Discuss your application

Drawings and reference visuals

Dimensions, ports and curves are reproduced from the webpage visuals. Use the original drawing units and confirm the current approved drawing before fabrication or installation.

4/3 Directional Control Valves - Flow characteristics

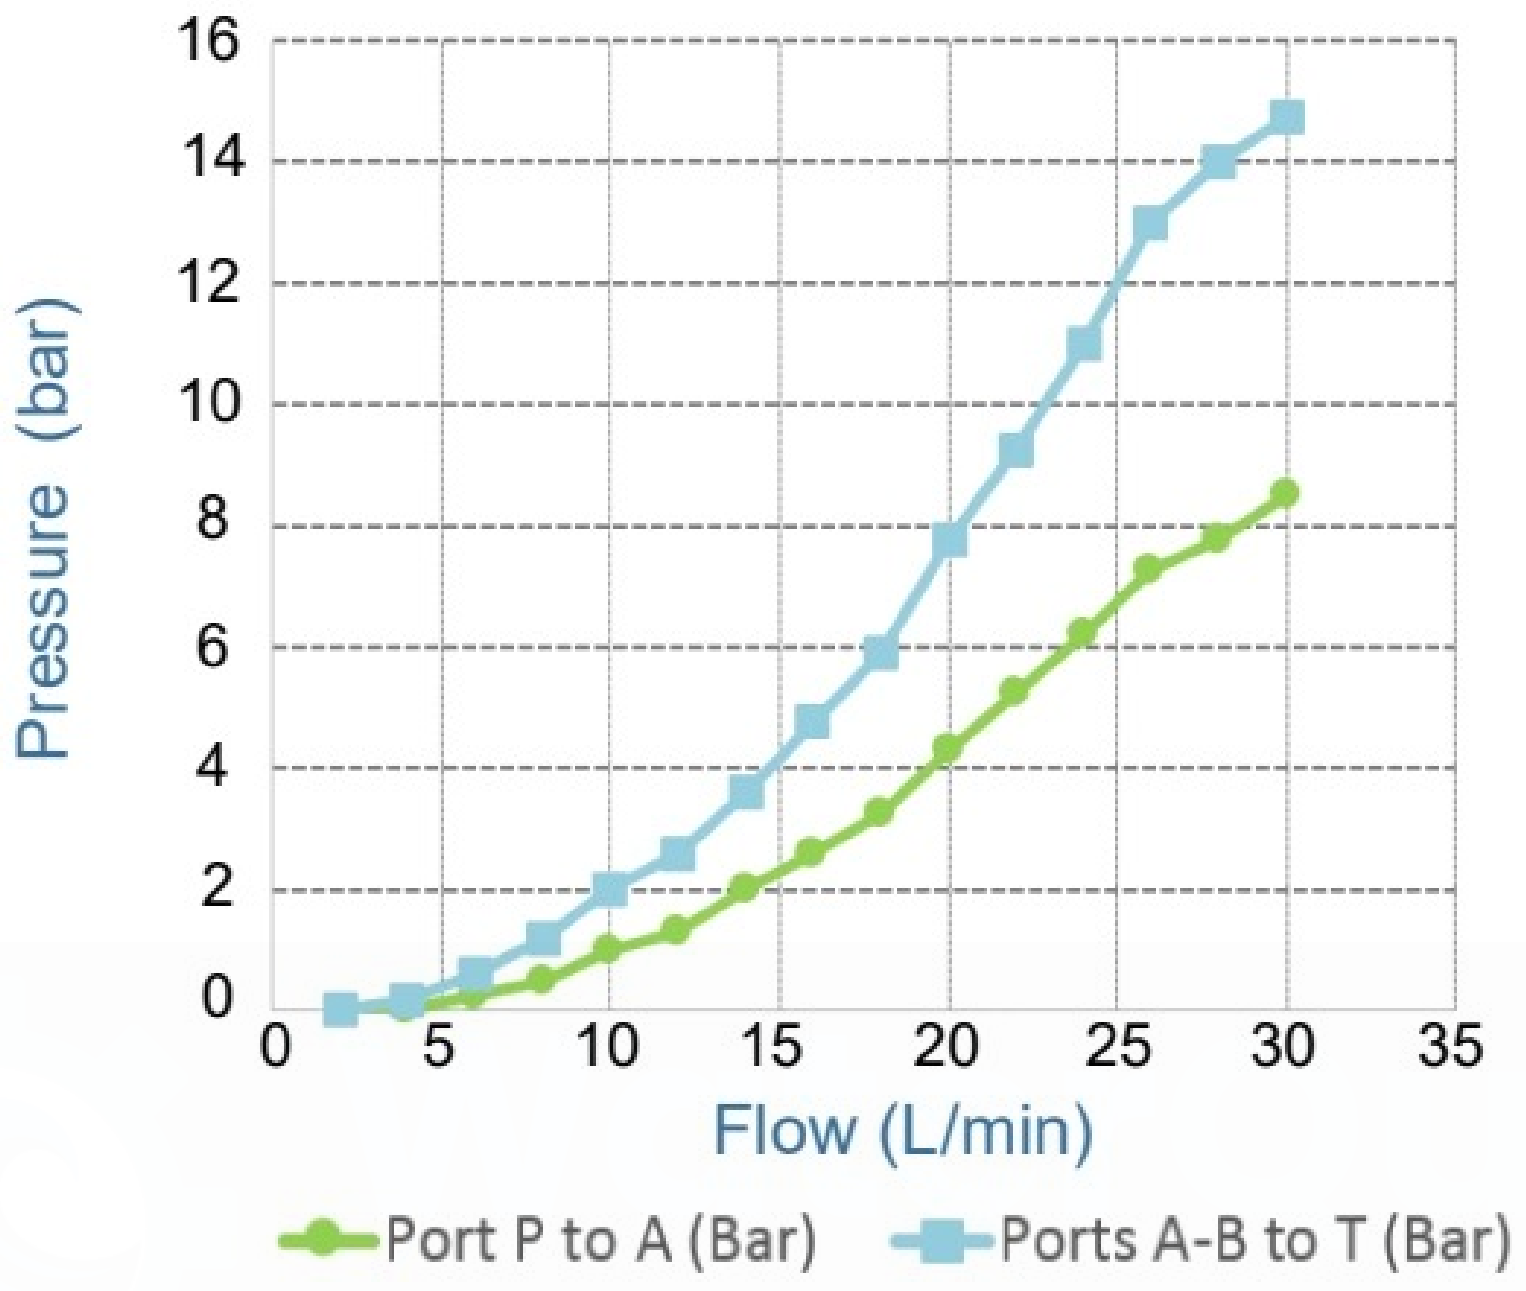

4/3 Directional Control Valves - Standard dimensions

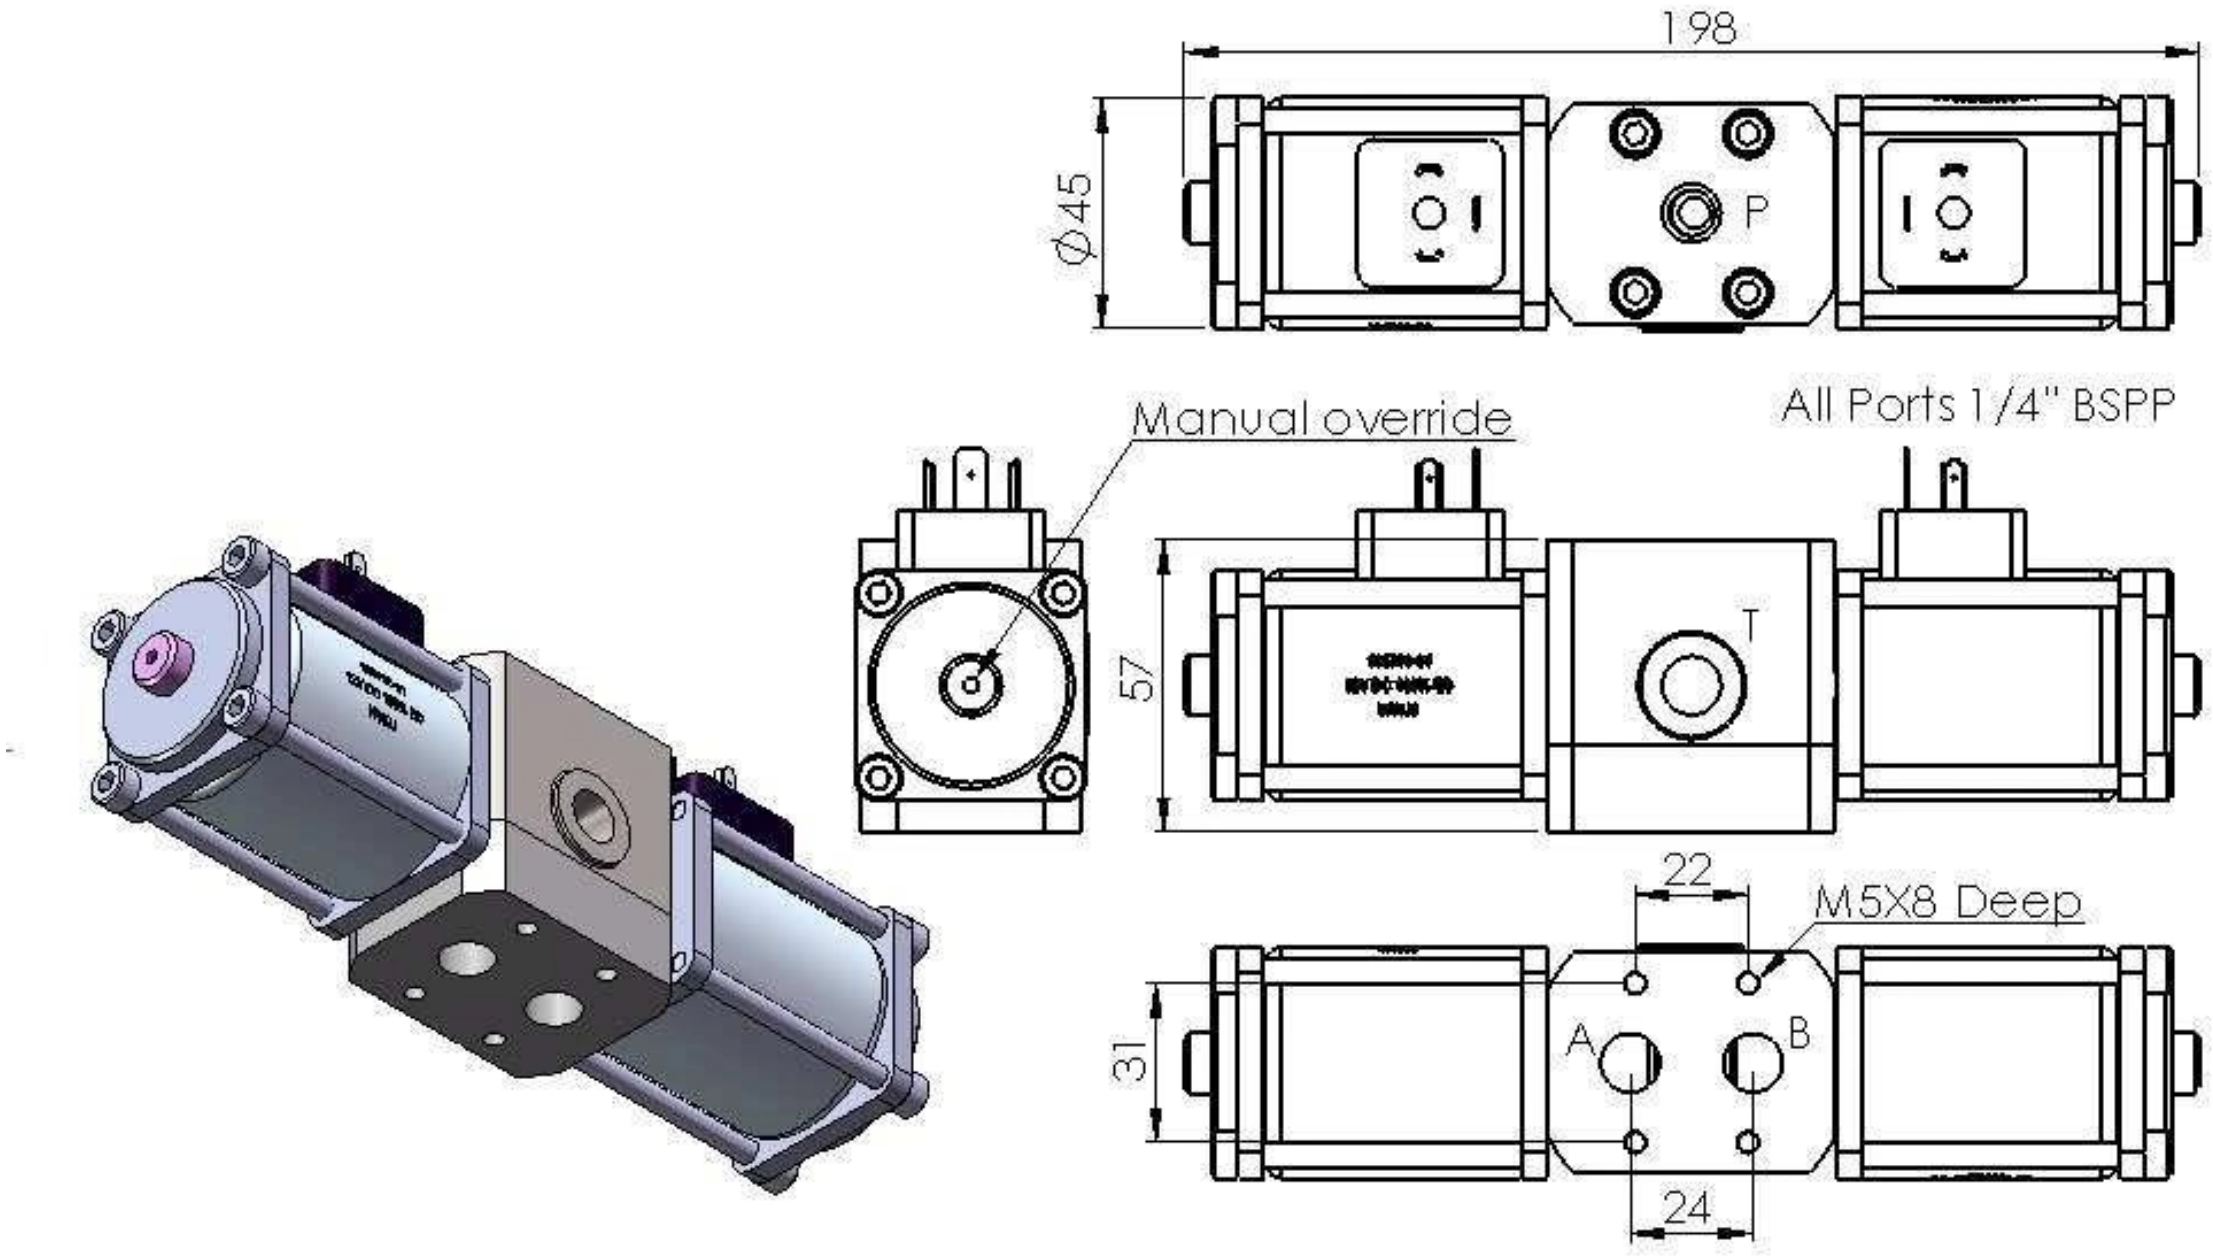
198
∅45
P
Manual override
All Ports 1/4" BSPP
57
T
22
M5X8 Deep
A
B
31
24

4/3 Directional Control Valves - CETOP dimensions

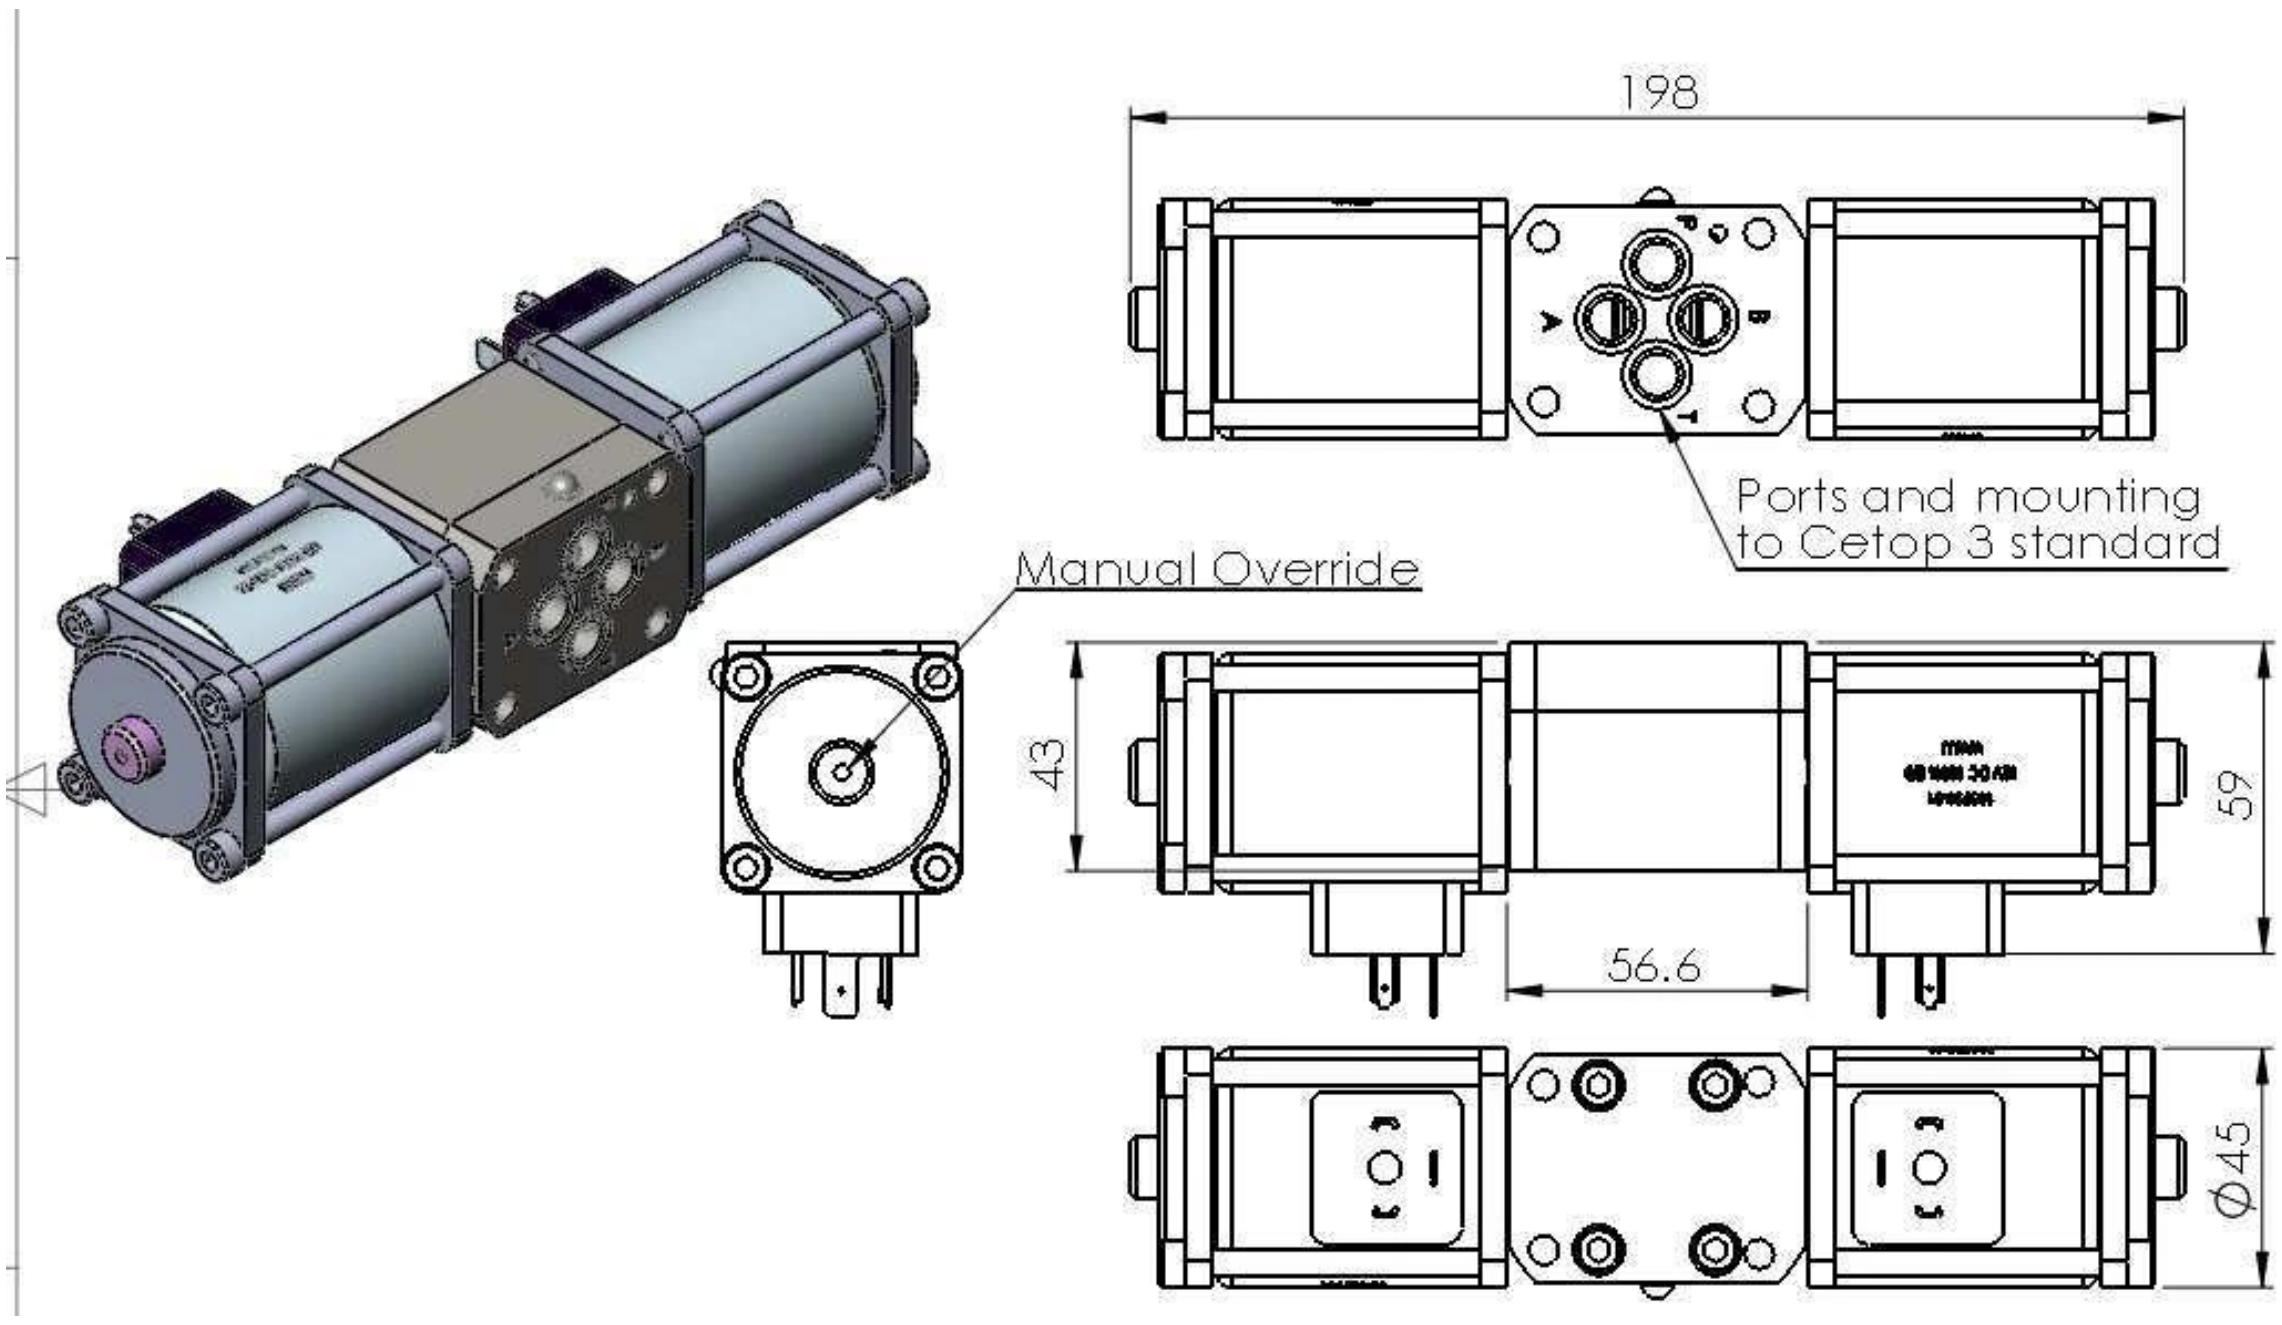
198
Ports and mounting to Cetop 3 standard
Manual Override
43
59
56.6
Ø45
P
A
B
T