
WATER HYDRAULIC VALVES / PRODUCT INFORMATION

Solenoid Actuation Cards

Match the actuation card to coil voltage, current, signal requirements and mounting. Include protection, wiring and the response to a lost command in the controls review.

Initial higher voltage provides actuation force before transitioning to hold.

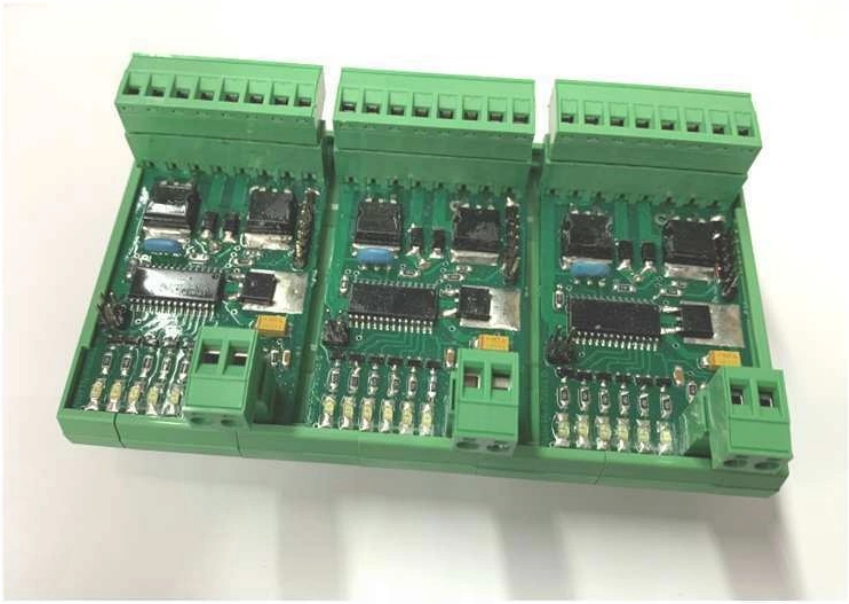

Solenoid Actuation Cards - Product view

Key operating parameters

Parameter	Published value
Standard power supply	Regulated 24 V DC, 5 A
Signal input	5-24 V relative to supply 0 V
PLC input current	6 mA at 24 V / 1 mA at 5 V
Initial energization	24 V for 100 ms
Second stage	15 V average for 2 seconds

Selection basis

Match the selected configuration to the working water, pressure, flow, temperature and duty. Maximum ratings and separate curve points do not establish one simultaneous operating point. Confirm installation and supplied configuration with WaterQuest Solutions.

Technical data

Parameter	Published value
Standard power supply	Regulated 24 V DC, 5 A
Signal input	5-24 V relative to supply 0 V
PLC input current	6 mA at 24 V / 1 mA at 5 V
Initial energization	24 V for 100 ms
Second stage	15 V average for 2 seconds
Holding stage	10 V average
Ambient temperature	−40 to 50 °C (-40 to 122 °F)
Minimum switching cycle	Do not cycle faster than once per second
48 V coil version	Requires 24 V and 48 V, 2.5 A power supplies
Mounting	Board only or optional DIN rail mount

Solenoid Actuation Cards - options

Assembly	24 V version	48 V version	H × L × W
Card only	004-010	004-013	38 × 78 × 42 mm (1.5 × 3.07 × 1.65 in)
1 card + DIN mount	004-104	004-114	50 × 80 × 45 mm (1.97 × 3.15 × 1.77 in)
2 cards + DIN mount	004-105	004-115	50 × 80 × 90 mm (1.97 × 3.15 × 3.54 in)
3 cards + DIN mount	004-106	004-116	50 × 80 × 136 mm (1.97 × 3.15 × 5.35 in)
Mount only / 1 card	004-101	004-101	50 × 80 × 45 mm (1.97 × 3.15 × 1.77 in)
Mount only / 2 cards	004-102	004-102	50 × 80 × 90 mm (1.97 × 3.15 × 3.54 in)
Mount only / 3 cards	004-103	004-103	50 × 80 × 136 mm (1.97 × 3.15 × 5.35 in)


Selection and integration

Selection considerations Match the card program to the coil. The standard sequence uses a compatible 12 V coil with controlled energization. Once energized, the card may hold with a signal as low as 1.3 V. Route signal wiring to prevent induced voltages. Discuss your application

Drawings and reference visuals

Dimensions, ports and curves are reproduced from the webpage visuals. Use the original drawing units and confirm the current approved drawing before fabrication or installation.

Solenoid Actuation Cards - Electrical connections

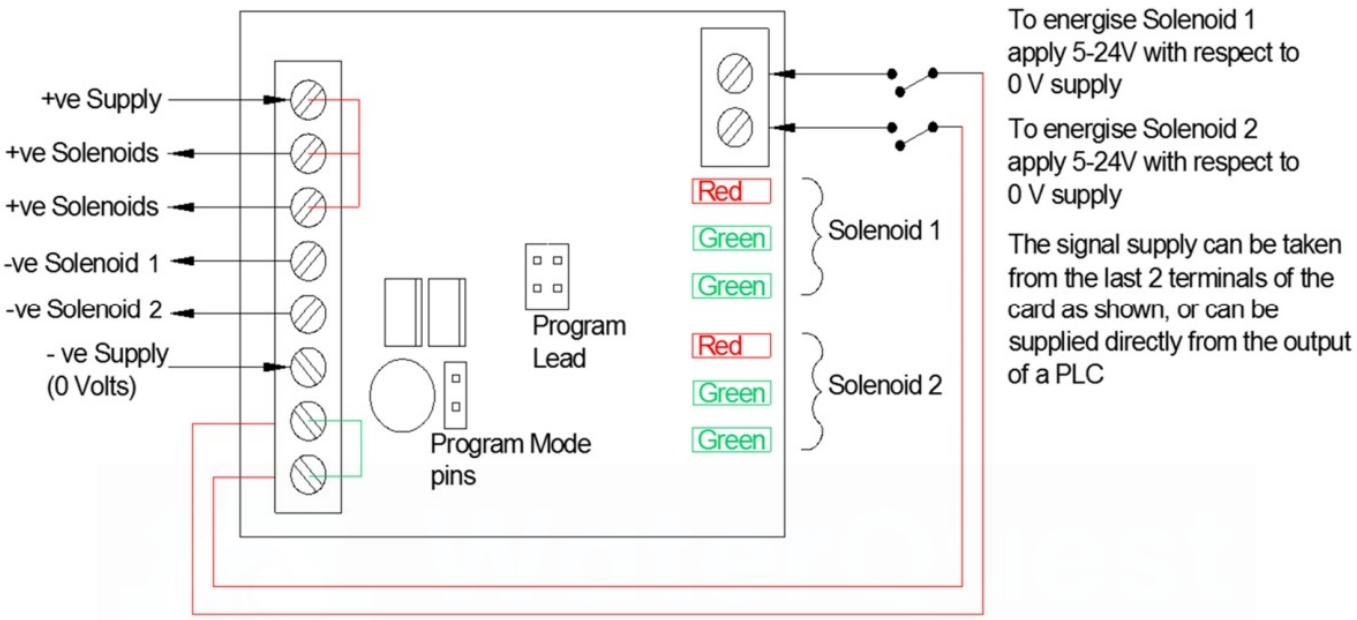

Solenoid Actuation Cards - DIN rail mounting

