WATER HYDRAULIC VALVES / PRODUCT INFORMATION

Flow Control Valves

A restriction affects speed through its relationship with pressure difference. Compare the required adjustment range with changing load, return pressure and heat generation.

Explore the dimensions, connections and performance information for this range. Select any image for a closer look.



Flow Control Valves - Product view

Key operating parameters

Parameter	Published value
Operating pressure	0.1-160 bar (1.45-2,321 psi)
Sizes / galleries	DN3: 3 mm (0.118 in) / DN6: 6 mm (0.236 in)
Maximum Cv, control direction	DN3: 0.02 / DN6: 0.62
Ports	¼" BSPP
Materials	AISI 316 stainless steel / polymer

Selection basis

Match the selected configuration to the working water, pressure, flow, temperature and duty. Maximum ratings and separate curve points do not establish one simultaneous operating point. Confirm installation and supplied configuration with WaterQuest Solutions.

Technical data

Parameter	Published value
Operating pressure	0.1-160 bar (1.45-2,321 psi)
Sizes / galleries	DN3: 3 mm (0.118 in) / DN6: 6 mm (0.236 in)
Maximum Cv, control direction	DN3: 0.02 / DN6: 0.62
Ports	¼" BSPP
Materials	AISI 316 stainless steel / polymer
Fluid	Water
Nominal adjustment travel	4 turns from fully open to closed
Setting protection	Locking screw

Flow Control Valves - options

Size	Order code	Gallery	Maximum Cv
DN3	204AXXW	3 mm (0.118 in)	0.02
DN6	204BXXW	6 mm (0.236 in)	0.62


Selection and integration

Selection considerations Select the valve against the required flow and pressure drop. Adjustment curves are shown at 160 bar (2,321 psi) inlet pressure. Discuss your application


Drawings and reference visuals


Dimensions, ports and curves are reproduced from the webpage visuals. Use the original drawing units and confirm the current approved drawing before fabrication or installation.

Flow Control Valves - Dimensions

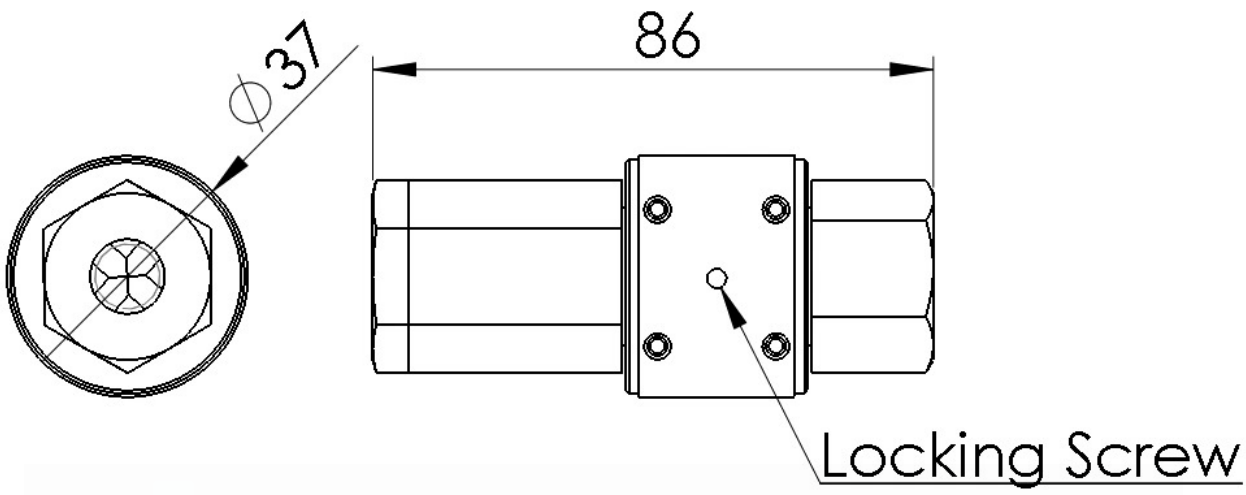


Flow Control Valves - Free-flow characteristics

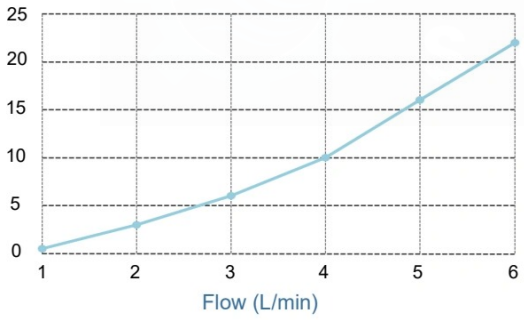

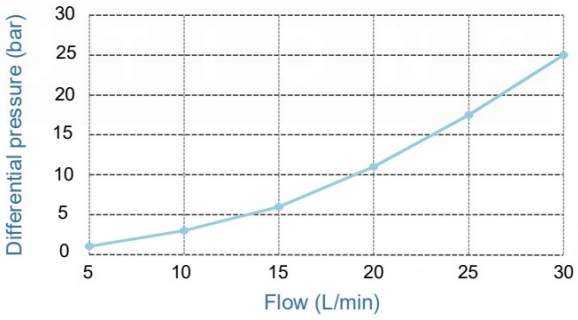

Flow Control Valves - DN3 adjustment

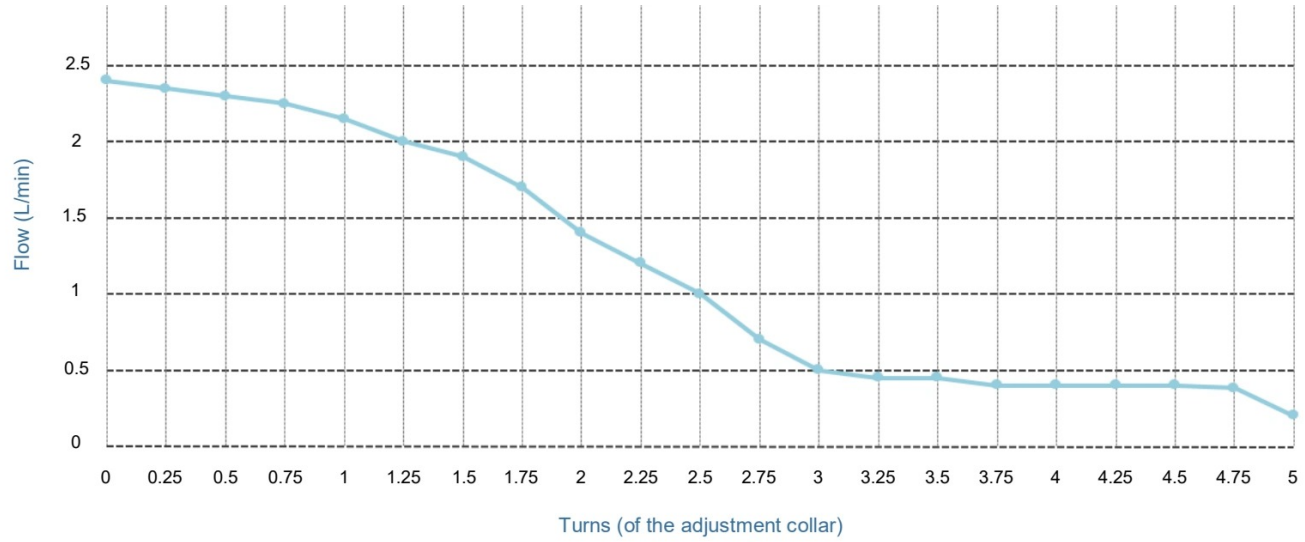

Flow Control Valves - DN6 adjustment

