
WATER HYDRAULIC VALVES / PRODUCT INFORMATION

Hose Burst Valves

Match the closing characteristic to normal peak flow and the fault being addressed. Check mounting, reset behaviour and the complete load-holding arrangement.

A surge in the monitored direction closes the valve and holds pressure at B.

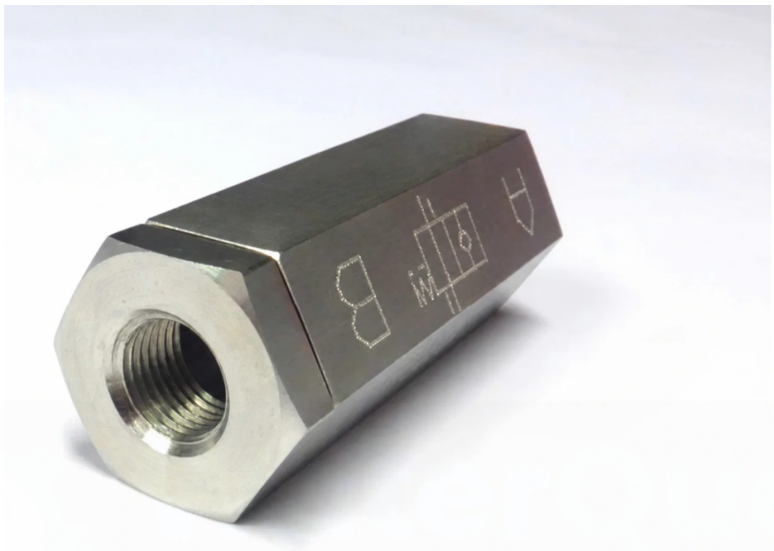

Hose Burst Valves - Product view

Key operating parameters

Parameter	Published value
Operating pressure	0.1-160 bar (1.45-2,321 psi)
Materials	AISI 316 stainless steel / polymer
Fluid	Water
Ports	¼" BSPP
Feed galleries	6 mm (0.236 in)

Selection basis

Match the selected configuration to the working water, pressure, flow, temperature and duty. Maximum ratings and separate curve points do not establish one simultaneous operating point. Confirm installation and supplied configuration with WaterQuest Solutions.

Technical data

Parameter	Published value
Operating pressure	0.1-160 bar (1.45-2,321 psi)
Materials	AISI 316 stainless steel / polymer
Fluid	Water
Ports	¼" BSPP
Feed galleries	6 mm (0.236 in)
Trip adjustment	Internal spring setting
Closing direction	Excessive flow from B to A
Reset	Reverse flow after hose replacement

Hose Burst Valves - options

Version	Order code	Maximum flow	Reverse-flow adjustment	Maximum Cv
DN3	591-001	30 L/min (7.93 US gpm)	1-5 L/min (0.264-1.32 US gpm)	0.02
DN6	591-007	50 L/min (13.2 US gpm)	5-10 L/min (1.32-2.64 US gpm)	0.62

Selection and integration

Selection considerations The trip setting is specified at 1.5 × maximum system flow. Confirm the compatible valve size and adjustment range before selection. Discuss your application

Drawings and reference visuals

Dimensions, ports and curves are reproduced from the webpage visuals. Use the original drawing units and confirm the current approved drawing before fabrication or installation.

Hose Burst Valves - Dimensions



Hose Burst Valves - Flow characteristics



