
WATER HYDRAULIC VALVES / PRODUCT INFORMATION

Valve Manifolds

Coordinate valve stations, common galleries, pressure drop and service access. Confirm the manifold drawing and port identification against the final circuit schematic.

Explore the dimensions, connections and performance information for this range. Select any image for a closer look.

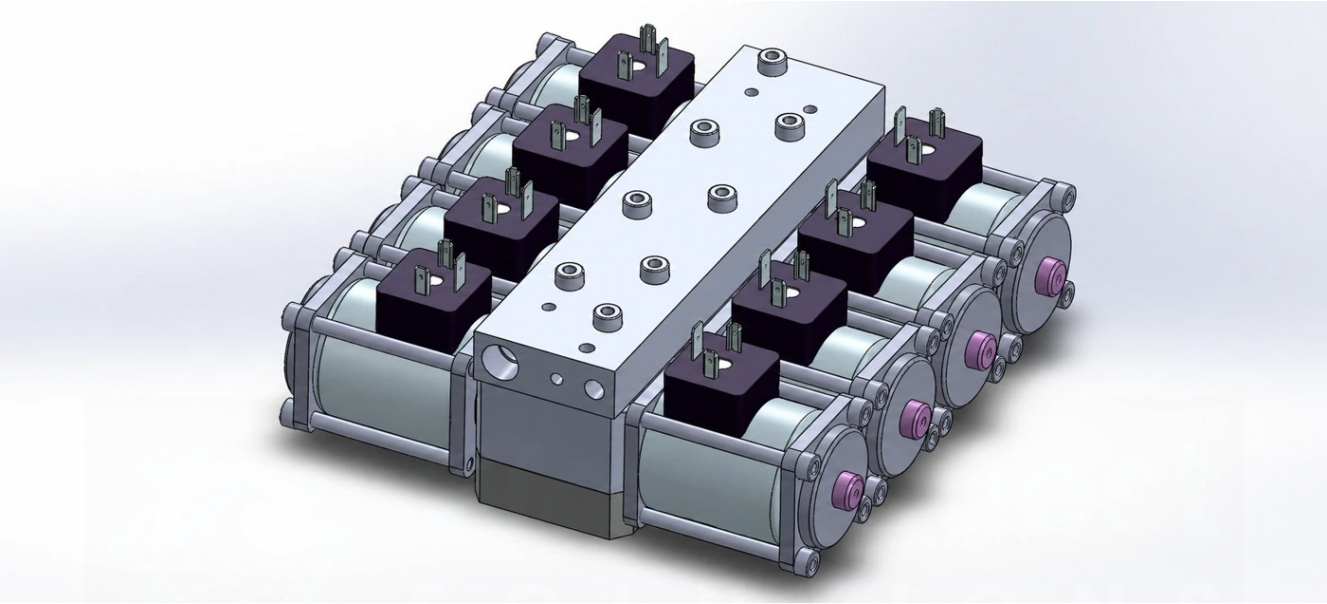

Valve Manifolds - Product view

Key operating parameters

Parameter	Published value
Construction	316 stainless steel
Stations	1, 2, 3 or 4
Compatible functions	3/2, 4/2 and 4/3 directional valves
Actuation formats	Solenoid, pilot or manual
Maximum flow without integral relief	30 L/min (7.93 US gpm)

Selection basis

Match the selected configuration to the working water, pressure, flow, temperature and duty. Maximum ratings and separate curve points do not establish one simultaneous operating point. Confirm installation and supplied configuration with WaterQuest Solutions.

Technical data

Parameter	Published value
Construction	316 stainless steel
Stations	1, 2, 3 or 4
Compatible functions	3/2, 4/2 and 4/3 directional valves
Actuation formats	Solenoid, pilot or manual
Maximum flow without integral relief	30 L/min (7.93 US gpm)
Maximum flow with 2M07BXSW	22 L/min (5.81 US gpm)
Illustrated inlet / auxiliary ports	¼" BSPP

Valve Manifolds - options

Stations	Standard block	With relief ports	Dimension A
1	6MANI1	6MANIR1	47 mm (1.85 in)
2	6MANI2	6MANIR2	94 mm (3.7 in)
3	6MANI3	6MANIR3	141 mm (5.55 in)
4	6MANI4	6MANIR4	188 mm (7.4 in)

Selection and integration

Selection considerations Confirm port orientation, valve sequence and assembly clearances for the finished block. Discuss your application

Drawings and reference visuals

Dimensions, ports and curves are reproduced from the webpage visuals. Use the original drawing units and confirm the current approved drawing before fabrication or installation.

Valve Manifolds - Dimensions

