
WATER HYDRAULIC VALVES / PRODUCT INFORMATION

DN6 Pilot-Operated Check Valves

Evaluate the DN6 arrangement against holding pressure, pilot supply and return conditions. Check controlled release as carefully as reverse-flow isolation.

3:1 and 9:1 versions let you match available pilot pressure to the holding duty.

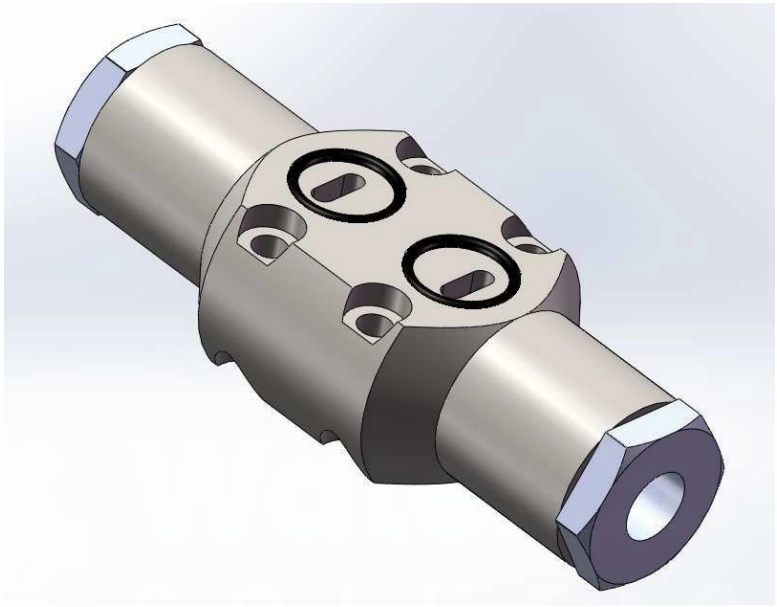

DN6 Pilot-Operated Check Valves - Product view

Key operating parameters

Parameter	Published value
Maximum inlet pressure	160 bar (2,321 psi)
Operating pressure	0-160 bar (0-2,321 psi)
Flow range	0-30 L/min (0-7.93 US gpm)
Pilot / seal area ratios	3:1 and 9:1
3:1 coefficients / gallery	Cv 0.62 / Kv 0.75 / 6 mm (0.0295 / 0.236 in)

Selection basis

Match the selected configuration to the working water, pressure, flow, temperature and duty. Maximum ratings and separate curve points do not establish one simultaneous operating point. Confirm installation and supplied configuration with WaterQuest Solutions.

Technical data

Parameter	Published value
Maximum inlet pressure	160 bar (2,321 psi)
Operating pressure	0-160 bar (0-2,321 psi)
Flow range	0-30 L/min (0-7.93 US gpm)
Pilot / seal area ratios	3:1 and 9:1
3:1 coefficients / gallery	Cv 0.62 / Kv 0.75 / 6 mm (0.0295 / 0.236 in)
9:1 coefficients / gallery	Cv 0.41 / Kv 0.50 / 4 mm (0.0197 / 0.157 in)
Ports	¼" BSPP
Materials	AISI 316 stainless steel / polymer
Fluid	Water
Free-flow cracking pressure	6 bar (87 psi) standard; 1 bar (14.5 psi) on request

DN6 Pilot-Operated Check Valves - options

Configuration	Stand-alone	Manifold
Double check / 3:1	213BJSW	2M13BJSW
Single check / 3:1	211BJSW	2M11BJSW
Double check / 9:1	222BJSW	2M22BJSW
Single check / 9:1	219BJSW	2M19BJSW


Selection and integration

Selection considerations Confirm pilot pressure, cylinder area ratio and residual-pressure conditions for the complete holding circuit. Discuss your application


Drawings and reference visuals

Dimensions, ports and curves are reproduced from the webpage visuals. Use the original drawing units and confirm the current approved drawing before fabrication or installation.

DN6 Pilot-Operated Check Valves - Flow characteristics

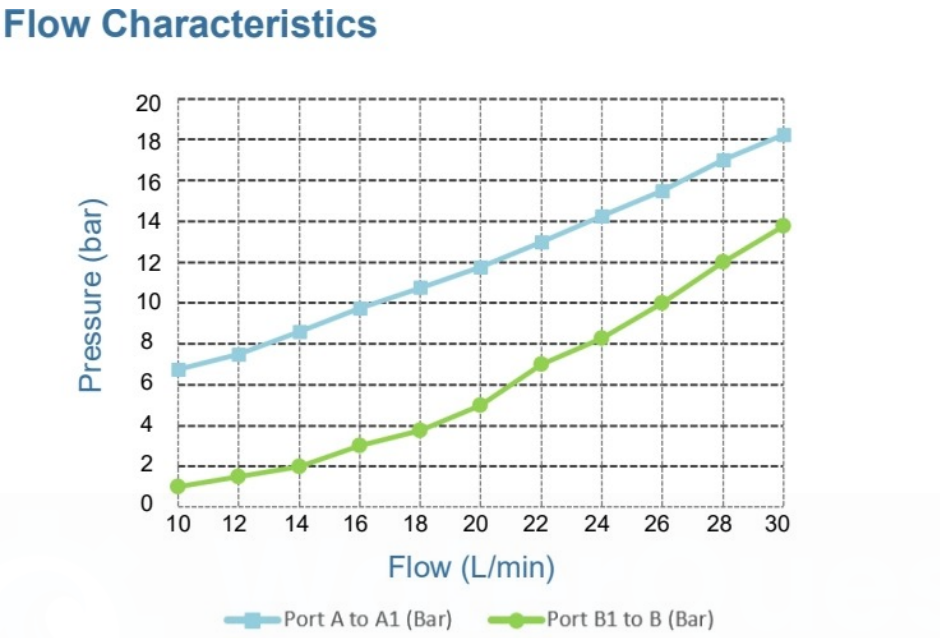

DN6 Pilot-Operated Check Valves - Double check dimensions

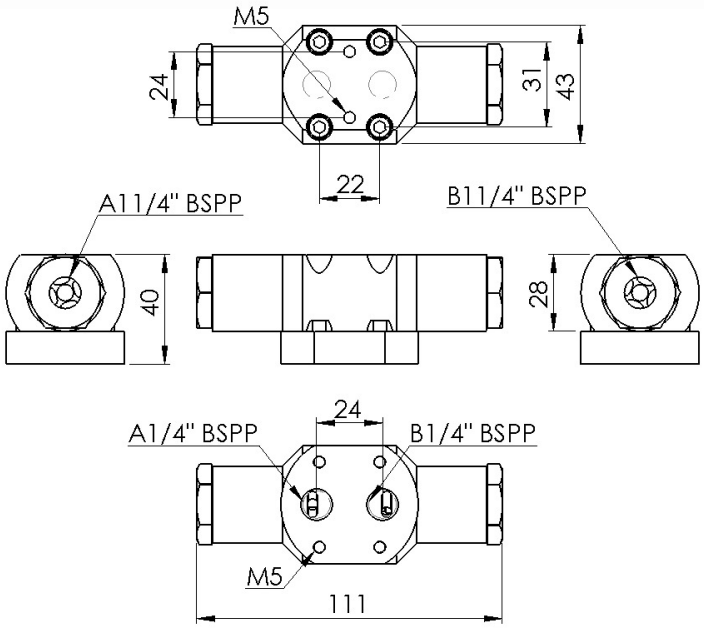

DN6 Pilot-Operated Check Valves - Single check dimensions

