
WATER HYDRAULIC VALVES / PRODUCT INFORMATION

Relief Valves

Select setting range and relieving capacity from the protected circuit. Review pressure override, return restrictions and the safe discharge route before treating the valve as adequate protection.

DN6 is offered as stand-alone or manifold-mounted; larger sizes suit higher flows.

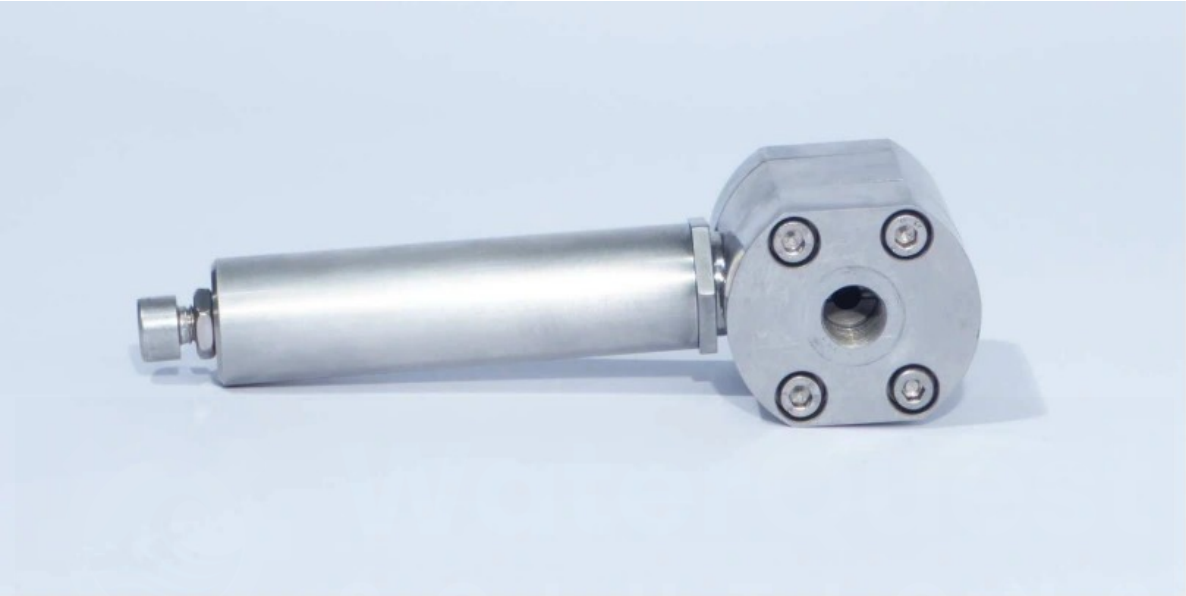

Relief Valves - Product view

Key operating parameters

Parameter	Published value
Maximum inlet pressure	180 bar (2,611 psi); confirm special pressure configurations
Setting bands	10-30 / 25-100 / 70-160 bar (145-435 / 363-1,450 / 1,015-2,321 psi); special ranges by review
DN3 flow	0-10 L/min (0-2.64 US gpm)
DN6 flow	0-30 L/min (0-7.93 US gpm)
DN12 flow	Confirm final configuration

Selection basis

Match the selected configuration to the working water, pressure, flow, temperature and duty. Maximum ratings and separate curve points do not establish one simultaneous operating point. Confirm installation and supplied configuration with WaterQuest Solutions.

Technical data

Parameter	Published value
Maximum inlet pressure	180 bar (2,611 psi); confirm special pressure configurations
Setting bands	10-30 / 25-100 / 70-160 bar (145-435 / 363-1,450 / 1,015-2,321 psi); special ranges by review
DN3 flow	0-10 L/min (0-2.64 US gpm)
DN6 flow	0-30 L/min (0-7.93 US gpm)
DN12 flow	Confirm final configuration
DN16 flow	0-450 L/min (0-119 US gpm)
Materials	316 stainless steel with polymer or ceramic
Standard seals	Nitrile; alternatives on request
Fluid	Water
Below-set leakage	Not a zero-leakage shut-off valve

Relief Valves - options

Setting band	DN6	DN6 manifold	DN12	DN16
10-30 bar (145-435 psi)	107BXSW	1M07BXSW	107DXSW	107EXSW
25-100 bar (363-1,450 psi)	407BXSW	4M07BXSW	407DXSW	407EXSW
70-160 bar (1,015-2,321 psi)	207BXSW	2M07BXSW	207DXSW	207EXSW
Special range - confirm	307BXSW	3M07BXSW	307DXSW	307EXSW


Selection and integration

Selection considerations Confirm DN12 capacity and the allowable inlet pressure for the selected configuration. A drip rate can occur below the set pressure. Specify a separate isolation function where zero leakage is required. Confirm certification and suitability separately for any safety-related duty. Discuss your application


Drawings and reference visuals

Dimensions, ports and curves are reproduced from the webpage visuals. Use the original drawing units and confirm the current approved drawing before fabrication or installation.


Relief Valves - Flow characteristics

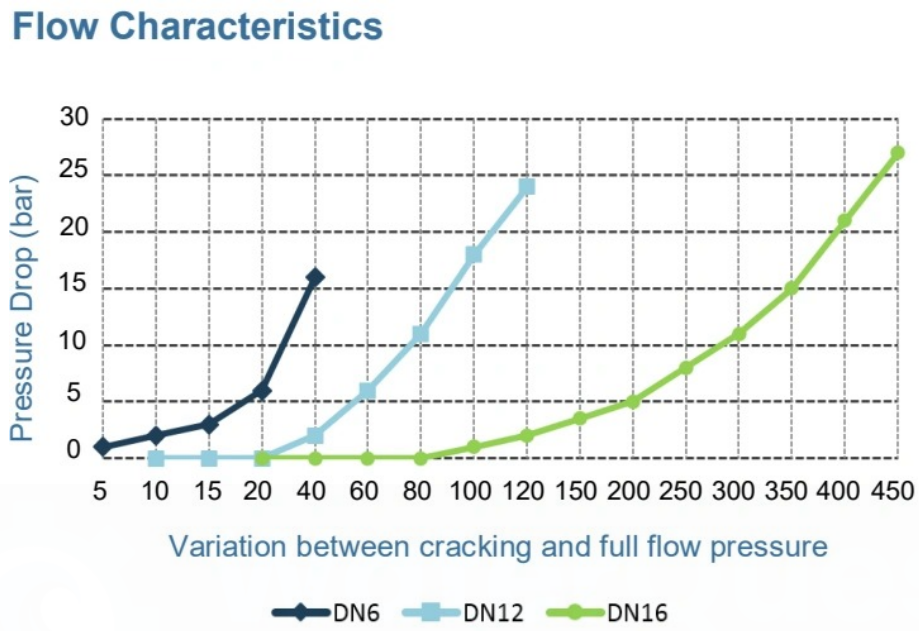

Relief Valves - DN6 dimensions

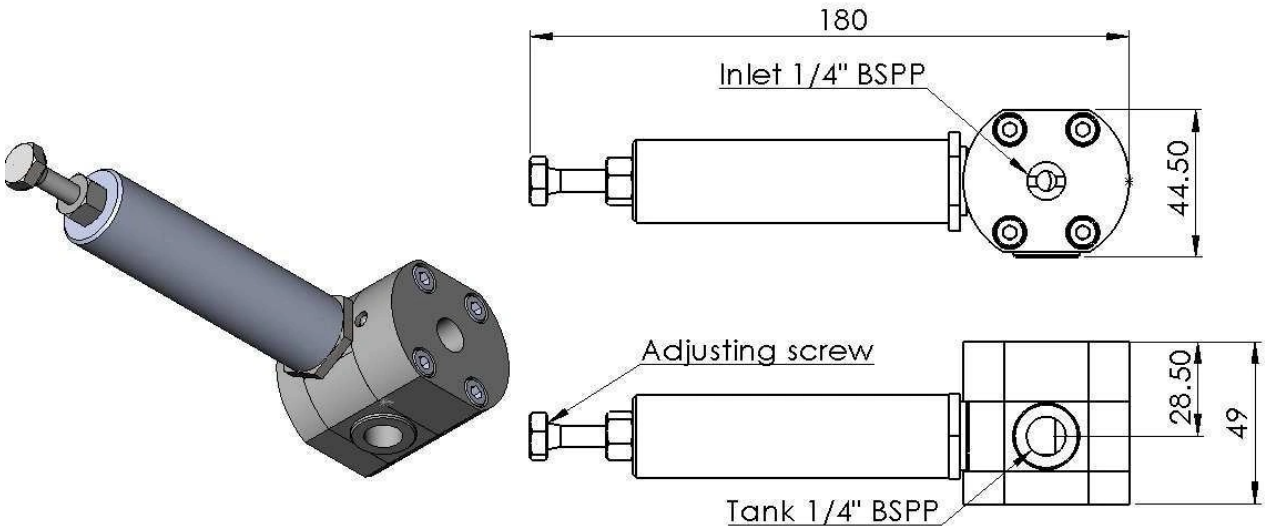

Relief Valves - DN12 dimensions

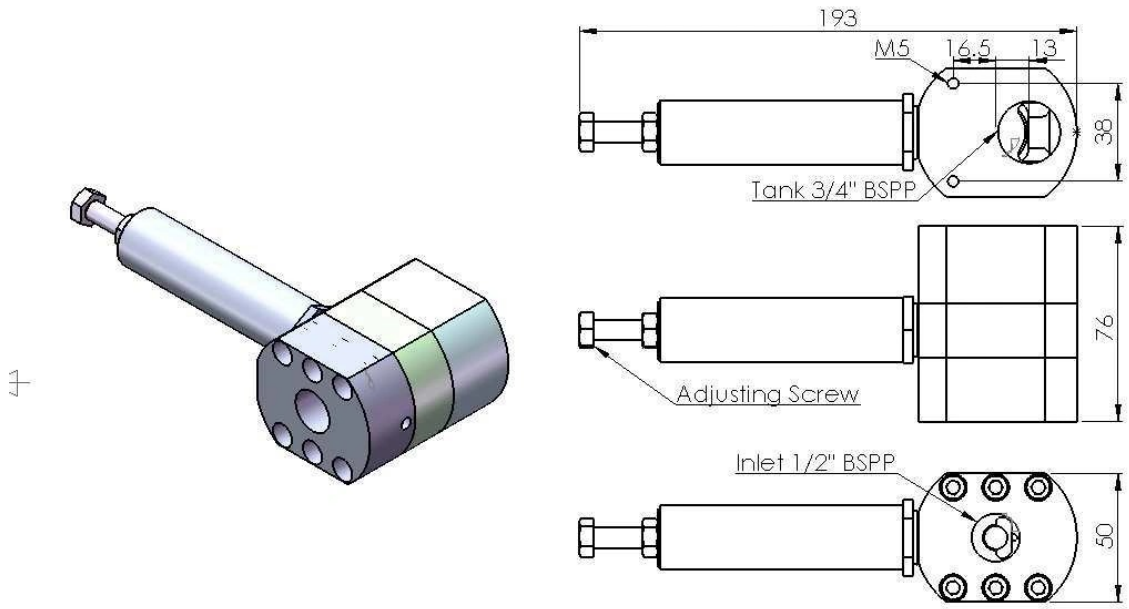

Relief Valves - DN16 dimensions

