
WATER HYDRAULIC VALVES / PRODUCT INFORMATION

Valve Ordering Guide

Specify the valve family, size, pressure range, actuation and connection details together. Confirm the final ordering code against the current manufacturer documentation.

A code describes a configuration; it does not establish that every possible combination is available.

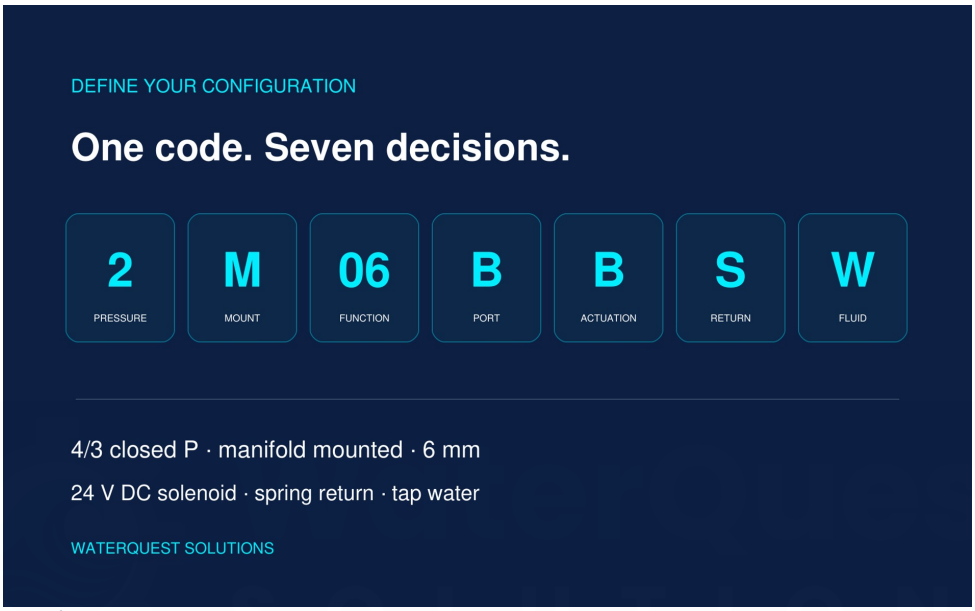

Valve Ordering Guide - Product view

Key operating parameters

Parameter	Published value
Pressure class	1: below 30 bar (435 psi) / 2: up to 160 bar (2,321 psi)
Special relief classes	3: special range / 4: 25-100 bar (363-1,450 psi); confirm configuration
Mounting	No letter: stand-alone / M: manifold / C: CETOP 3
Port-size letters	A: 3 / B: 6 / C: 9 / D: 12 / E: 16 / F: 25 / G: 38 mm (1.5 in)
Fluid letters	O: other / S: seawater / T: technical water / W: tap water

Selection basis

Match the selected configuration to the working water, pressure, flow, temperature and duty. Maximum ratings and separate curve points do not establish one simultaneous operating point. Confirm installation and supplied configuration with WaterQuest Solutions.

Technical data

Parameter	Published value
Pressure class	1: below 30 bar (435 psi) / 2: up to 160 bar (2,321 psi)
Special relief classes	3: special range / 4: 25-100 bar (363-1,450 psi); confirm configuration
Mounting	No letter: stand-alone / M: manifold / C: CETOP 3
Port-size letters	A: 3 / B: 6 / C: 9 / D: 12 / E: 16 / F: 25 / G: 38 mm (1.5 in)
Fluid letters	O: other / S: seawater / T: technical water / W: tap water
Return S	Spring return only

Valve function codes

Code	Valve function
01	4/2 directional
02	4/3 closed centre - confirm availability
03	3/2 spring to P closed
04	Priority flow control
05	Inline relief
06	4/3 closed P
07	Pressure control
08	3/2 spring to P open
09	Pressure reducing
10	Check
11	Single PO check / 3:1
12	4/3 open centre
13	Double PO check / 3:1
14	4/3 P to A/B at centre
15	Flow divider
16	Pressure-compensated flow control
17	Solenoid-operated unloader
19	Single PO check / 9:1
21	2/2 normally open
22	Double PO check / 9:1
23	Electronic flow control
25	Electronic pressure control
26	2/2 normally closed
XX	Assembly

Actuation and return letters

Letter	Actuation / return
A	12 V DC solenoid; no card
B	24 V DC solenoid; card required
C	48 V DC solenoid; card required
D	Detent
F	Air pilot
G	Manual
H	Flow controlled
J	Water pilot
L	Oil pilot
N	24 V DC proportional
O	24 V DC; no card
P	48 V DC; no card
R	Stepper motor control
S	Spring - return only
X	Pressure

Selection and integration

Selection considerations An actuation card is a separate item for solenoid configurations that require one. Use the product page’s listed ordering options and confirm mounting, fluid and actuation compatibility. Discuss your application