WATERQUEST SOLUTIONS

P60 Janus water pump

Equipment selection record

The maximum listed displacement is 70.3 cm³/rev. At 2,000 rpm, theoretical flow is 140.6 L/min (37.14 US gpm). Delivered flow is lower when volumetric leakage is present. Use the selected displacement and duty-point curve to size the installation.

Installation and quotation

Specify fluid chemistry, temperature, filtration, inlet supply, backpressure, speed, rotation, shaft coupling and mounting. No induced radial or axial shaft load. Include the required controls, commissioning and documentation.


Source: The Water Hydraulics Company, Janus pump catalogue V.01.25 and model information. Reference curves and dimensions follow.

Manufacturer: The Water Hydraulics Company, UK.
Canadian distributor: WaterQuest Solutions.

P60 | Performance curves

Read displacement, speed and pressure together. Published curve data are preserved.


Output flow (L/min)

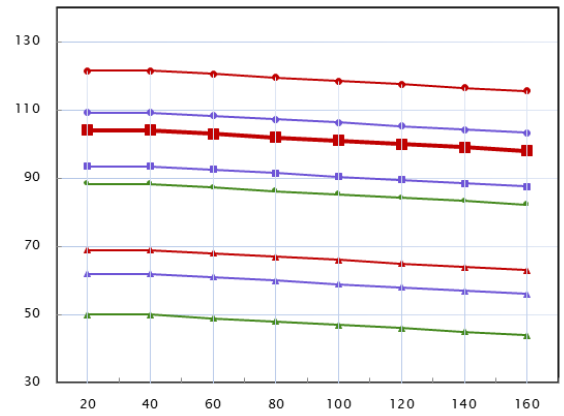

Pressure (bar)

70cc 1750rpm | 70cc 1500rpm | 70cc 1000rpm
63cc 1750rpm | 63cc 1500rpm | 63cc 1000rpm
51cc 1750rpm | 51cc 1500rpm | 51cc 1000rpm


Input power (kW)

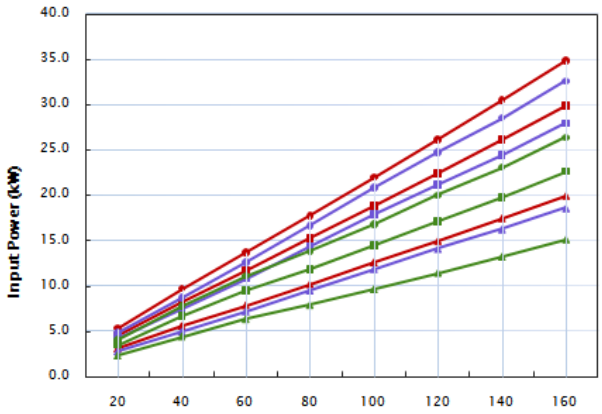

Pressure (bar)

70cc 1750rpm | 70cc 1500rpm | 70cc 1000rpm
63cc 1750rpm | 63cc 1500rpm | 63cc 1000rpm
51cc 1750rpm | 51cc 1500rpm | 51cc 1000rpm


Input torque (N·m)

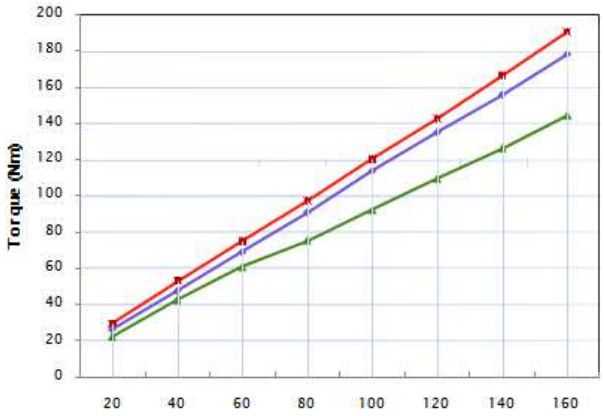

Pressure (bar)

70cc 1500rpm | 63cc 1500rpm | 51cc 1500rpm

Overall efficiency (%)

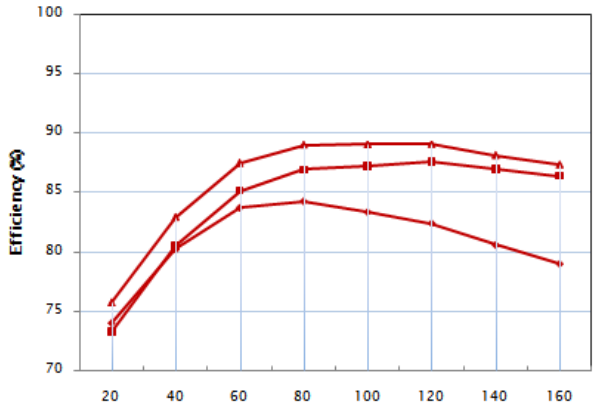

Pressure (bar)

70cc 500 rpm | 70cc 1000rpm | 70cc 1500rpm

Apply the curves to the duty

Published curves are operating references, not simultaneous maximum ratings. Read efficiency at the proposed duty instead of quoting a peak value for the complete system.


1 L/min = 0.264172 US gpm; 1 bar = 14.5038 psi; 1 kW = 1.34102 hp; 1 N·m = 0.737562 lbf·ft.

The Water Hydraulics Co. Janus pump catalogue V.01.25, p. 16.

P60 | Dimensions & connections

Manufacturer technical reference | dimensions govern; reproduction is not to scale.


PB160-51W, PB160-63W & PB160-70W

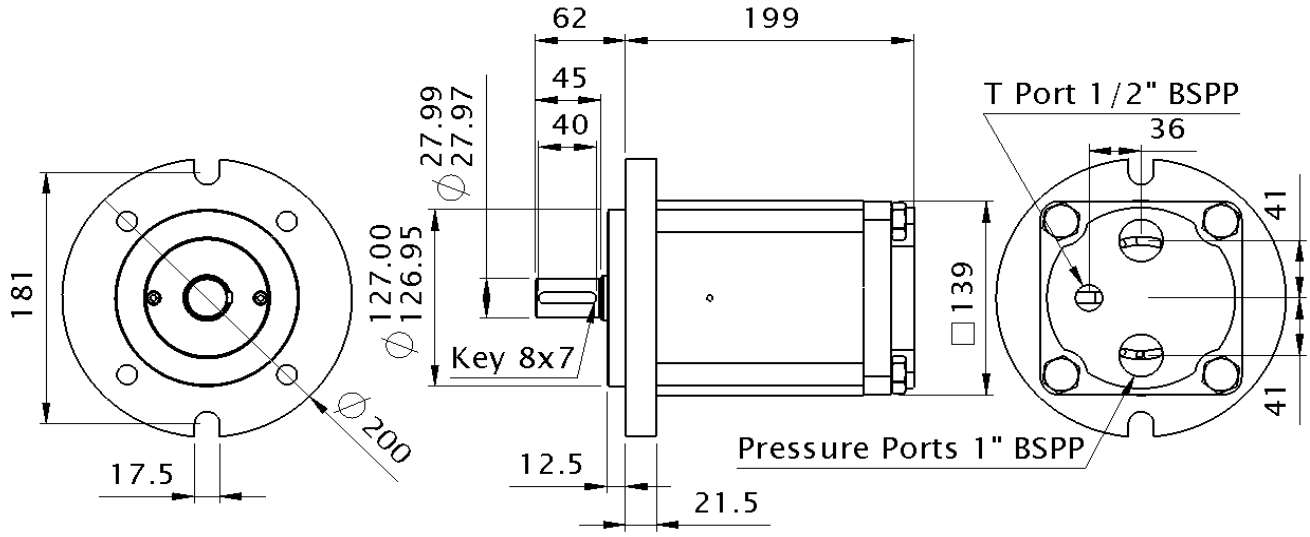

PC160-51W, PC160-63W & PC160-70W

PA160-51W, PA160-63W & PA160-70W

PPC160-51W, PPC160-63W & PPC160-70W (O ring face seal and M10 holes only added on PP Option)

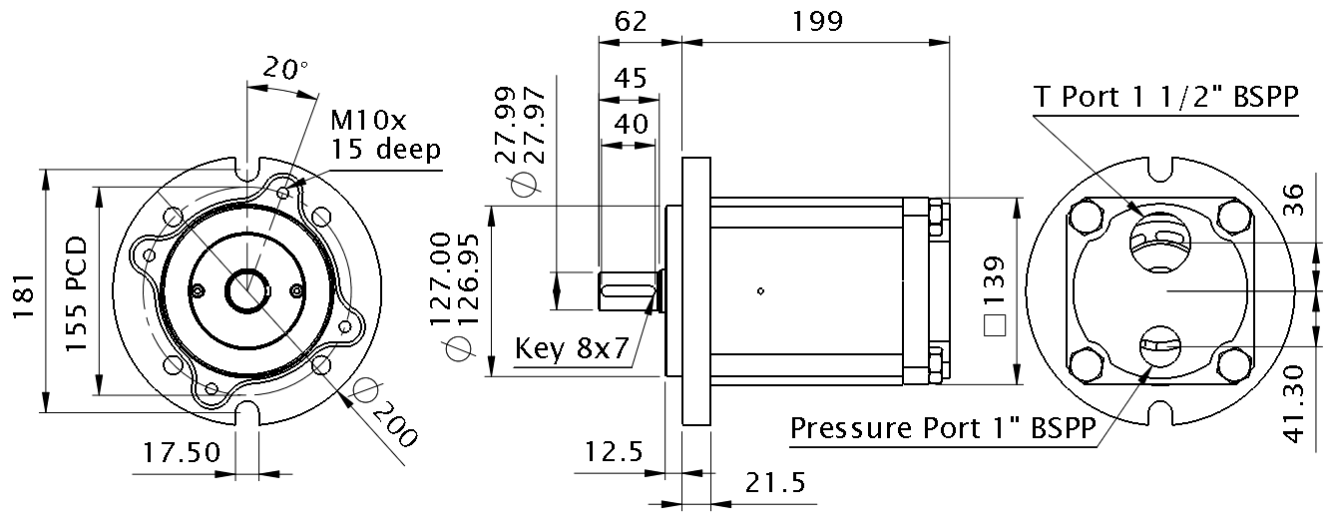

Port threads and flange classes are connection designations, not converted diameters or operating-pressure ratings. Select the exact configuration shown on the approved order drawing.

The Water Hydraulics Co. Janus pump catalogue V.01.25, p. 15.