SYSTEMS & COMPONENTS

Power your next project.

Water hydraulics. Stainless connections. Armak air motors.



Water hydraulic power units



Cylinders and motion control



Armak pneumatic drives

When equipment needs to move, turn, hold or pressurise water, start with the duty and build the right package around it. WaterQuest supplies systems and components with Canadian product-selection support.

Reduce hydraulic-oil exposure

Choose purpose-built water hydraulics for selected circuits near products, waterways and sensitive operations.

Connect the whole circuit

Bring pumps, actuators, valves, stainless fittings and instruments into one coordinated enquiry.

Explore the range	Pages
Pumps, motors, cylinders and water hydraulic controls	02-06
Power units, fire-pump components, seawater pumps and RO	07-10
Halo odour-control applications	11
WQS Stainless fittings, adapters and instruments	12-16
Armak motors, controls and accessories	17-18
Start your component or system enquiry	19

Tell us what your equipment needs to do.

Send a duty, drawing or part number. We'll help identify the products to quote.

bruce@waterquestsolutions.com | +1 (604) 902-1902

Product images show representative configurations. Final selection is matched to your duty.

AXIAL PISTON WATER PUMPS

Flow for the work ahead.

Supply water hydraulic power for machinery, actuation and process duties.



Axial piston pump range

Replace the hydraulic-oil inventory in a selected supply circuit with purpose-designed water pumping. Seven frame sizes give you a practical starting point for small mechanisms through larger industrial duties.

Model	Displacement cm³/rev (in³/rev)	Maximum flow L/min (US gpm)	Maximum input kW (hp)
P1	0.8-1.2 (0.049-0.073)	2.4 (0.63)	0.55 (0.74)
P3	3.0 (0.183)	6.0 (1.59)	1.75 (2.35)
P6	4.6-6.0 (0.281-0.366)	12 (3.17)	3.8 (5.1)
P15	12-19 (0.732-1.16)	37.2 (9.83)	11 (14.8)
P30	23-35 (1.40-2.14)	66 (17.4)	19.5 (26.1)
P60	51-70.3 (3.11-4.29)	146 (38.6)	42 (56.3)
P180	135-225 (8.24-13.7)	430 (114)	114 (153)

Build around your operating cycle

Choose fixed displacement across the range, with variable-displacement options on P60 and P180. We can help coordinate the drive, inlet arrangement, controls and connection hardware.

P3-P180: up to 160 bar (2,321 psi). P1 rating is confirmed for the selected configuration. Listed maxima are selection references and may occur at different operating points. P180 requires boosted inlet operation.

Request a pump recommendation.

Send flow, pressure, working water, temperature, shaft speed and duty cycle.


bruce@waterquestsolutions.com | +1 (604) 902-1902

Product images show representative configurations. Final selection is matched to your duty.

WATER HYDRAULIC MOTORS

Put water-powered torque to work.

Turn pressure and flow into productive rotary motion.

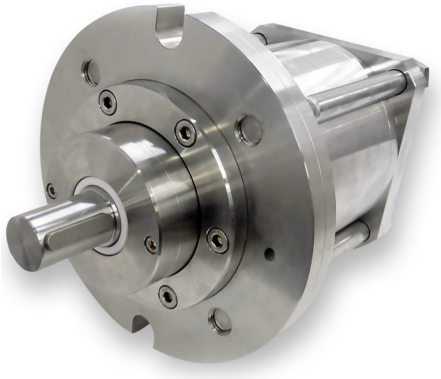

Representative axial piston water hydraulic motor

Drive conveyors, mixers, winches and other mechanisms while removing hydraulic oil from the motor's working circuit. Match the motor to starting torque, running speed and the load throughout the cycle.

Model	Displacement cm³/rev (in³/rev)	Where to start
M3	3.0 (0.183)	Compact conveyors, mixers and mechanisms.
M6	6.0 (0.366)	Small rotary drives with higher torque demand.
M15	15 / 19 (0.915 / 1.16)	Intermediate process and handling duties.
M30	30 / 35 (1.83 / 2.14)	Larger rotary drives and controlled movement.
M60	63 / 70.3 (3.84 / 4.29)	Higher-displacement industrial drives.
M180	Configuration selected to duty	Large rotary duties and high-load mechanisms.

A coordinated rotary-drive package

Unidirectional and bidirectional configurations support different machine sequences. Ask us to include the pump supply, directional control, overrun protection and stainless connections in your enquiry.

Range rated up to 160 bar (2,321 psi), subject to the selected configuration. Confirm shaft support, coupling, case drain and backpressure. Saline service requires the appropriate material and seal package.

Match a motor to your load.

Send starting/running torque, speed range, duty cycle and the mounting drawing.

bruce@waterquestsolutions.com | +1 (604) 902-1902

Product images show representative configurations. Final selection is matched to your duty.

WATER HYDRAULIC CYLINDERS

Move the load with confidence.

Push, pull, lift and position with a purpose-built stainless actuator.



Water hydraulic cylinder range



Representative end connections

Bore diameter	Rod diameter	Extension force*	Retraction force*
32 mm (1.26 in)	16 mm (0.63 in)	12.61 kN (2,835 lbf)	9.46 kN (2,126 lbf)
32 mm (1.26 in)	20 mm (0.787 in)	12.61 kN (2,835 lbf)	7.68 kN (1,728 lbf)
40 mm (1.57 in)	25 mm (0.984 in)	19.70 kN (4,430 lbf)	12.01 kN (2,699 lbf)
50 mm (1.97 in)	25 mm (0.984 in)	30.79 kN (6,921 lbf)	23.09 kN (5,191 lbf)
50 mm (1.97 in)	30 mm (1.18 in)	30.79 kN (6,921 lbf)	19.70 kN (4,430 lbf)
64 mm (2.52 in)	30 mm (1.18 in)	50.44 kN (11,340 lbf)	39.36 kN (8,848 lbf)
64 mm (2.52 in)	40 mm (1.57 in)	50.44 kN (11,340 lbf)	30.74 kN (6,910 lbf)
80 mm (3.15 in)	50 mm (1.97 in)	78.82 kN (17,719 lbf)	48.03 kN (10,797 lbf)
100 mm (3.94 in)	60 mm (2.36 in)	123.15 kN (27,685 lbf)	78.82 kN (17,719 lbf)
100 mm (3.94 in)	80 mm (3.15 in)	123.15 kN (27,685 lbf)	44.33 kN (9,967 lbf)
125 mm (4.92 in)	80 mm (3.15 in)	192.42 kN (43,258 lbf)	113.61 kN (25,540 lbf)

*Calculated at 160 bar (2,321 psi) using the manufacturer's 0.98 force factor. Available force depends on pressure at both ports, friction and the mechanism.

Make it fit your machine. Front/rear flange and plain/spherical bearing body mounts are offered, with male/female threaded or plain/spherical bearing rod ends. Stroke and mounting details are selected for your application.

Request an actuator quotation.

Send loads, stroke, cycle time, available space and mounting details.

bruce@waterquestsolutions.com | +1 (604) 902-1902

Product images show representative configurations. Final selection is matched to your duty.

DIRECTIONAL & LOAD-HOLDING VALVES

Control every movement.

Route water, reverse motion and manage the load.



Representative water hydraulic control valve

Build a reliable operating sequence around the valve function you need: start, stop, reverse, hold or protect. Water-service valves help turn pump output into useful machine control.

Product	Flow / size	Selection detail
2/2 directional	0-10 L/min (0-2.64 US gpm)	¼ in BSPP; 12/24 V DC; 8-160 bar (116-2,321 psi).
2/2 pilot	DN9: 0-60; DN25: 0-120 L/min (0-15.9 / 0-31.7 US gpm)	/ 1 in BSPP; 12/24 V DC.
4/2, 3/2 and 4/3	0-30 L/min (0-7.93 US gpm)	¼ in BSPP; 24 V DC; up to 160 bar (2,321 psi).
DN16 directional	0-140 L/min (0-37 US gpm)	¾ in BSPP; operating range up to 100 bar (1,450 psi).
Zone valves	DN3, DN9, DN25; up to 60 L/min (15.9 US gpm) per zone	12/24 V DC; up to 160 bar (2,321 psi).
Check valves	DN6, DN9, DN12, DN16, DN25	Standard 1 bar (14.5 psi) cracking pressure.
Pilot-operated checks	DN6: 0-30; DN12: 0-60 L/min (0-7.93 / 0-15.9 US gpm)	Controlled release for load-holding circuits.
Hose-burst valve	DN6 gallery; ¼ in BSPP	Trip setting matched to the circuit.

Pressure and flow limits depend on the exact valve. DN16 directional maximum inlet pressure is 160 bar (2,321 psi), with a lower published operating range. Load-holding performance is reviewed for the complete circuit.

Send us your valve function or schematic.

We'll help match flow, pressure, actuation and port connections.

bruce@waterquestsolutions.com | +1 (604) 902-1902

Product images show representative configurations. Final selection is matched to your duty.

REGULATING VALVES & ELECTRONICS

Fine-tune flow and pressure.

Build control around the output your process needs.



Water-service valve



Pressure indication

Product	Range / function	Package options
Flow control	DN3 and DN6; ¼ in BSPP	Adjust movement speed and circuit flow.
Pressure-compensated flow	DN3: 0.5-5; DN6: 3-30 L/min (0.13-1.32 / 0.79-7.93 US gpm)	5-160 bar (72.5-2,321 psi); locking adjustment.
Electronic flow control	DN3/DN6; up to 30 L/min (7.93 US gpm)	48 V DC motor; open-loop or feedback-based control.
Electronic pressure control	DN6/DN12; DN12 5-100 L/min (1.32-26.4 US gpm)	48 V DC motor; ST5 drive and suitable feedback.
Pressure reducing	DN6; up to 30 L/min (7.93 US gpm)	Outlet setting bands selected to the pressure duty.
Pressure relief	DN3, DN6, DN12, DN16	Protect the circuit; DN16 flow up to 450 L/min (119 US gpm), by configuration.
Manifolds	Solenoid, pilot or manual formats	Combine valve functions with a coordinated port arrangement.
Actuation cards / ST5-Q-NN	Solenoid and programmable valve drives	Connect commands, feedback and fault responses to the machine controls.

Order the control function as a package

Ask for the valve, manifold, drive electronics, instrumentation and connection hardware together. An agreed interface schedule helps keep the equipment and controls aligned.

The selected valve record defines pressure, flow, supply and control limits. Use the ordering guide to identify function, size, pressure class, actuation and return arrangement.

Build a better control enquiry.

Share flow, pressure, voltage, command signal and the required normal/fault states.

bruce@waterquestsolutions.com | +1 (604) 902-1902

Product images show representative configurations. Final selection is matched to your duty.

PICK A PACK HYDRAULIC POWER UNITS

Bring the power supply together.

One coordinated water hydraulic package for your machine or plant.



Example assembled water hydraulic power unit

Combine the pump, motor, reservoir, filtration and controls around your actual operating cycle. Pick a Pack helps you move from a list of component requirements to a defined HPU enquiry.

Package element	Choices
Pumps	P1, P3, P6 and P15; P30, P60 and P180 on request.
Reservoirs	5, 25, 55 or 90 L (1.32, 6.60, 14.5 or 23.8 US gal).
Filtration	Return filter with gauge/pressure switch; incoming-water filter and auto-fill options.
Valves and accessories	C01-C07 valve packages; hand pump, pressure/level gauges, heat exchanger, fan cooler and return connections.
Drive and controls	Specify electrical supply, enclosure, sequence, I/O and required acceptance.

P1 HPU: up to 100 bar (1,450 psi). P3/P6/P15 HPUs: up to 160 bar (2,321 psi). Equipment, electrical scope, installation and commissioning are defined with the quotation.

Get a power-unit quotation.

Send the actuator duty, simultaneous demand, site utilities and available footprint.

bruce@waterquestsolutions.com | +1 (604) 902-1902

Product images show representative configurations. Final selection is matched to your duty.

AXIAL PISTON FIRE-PUMP COMPONENTS

Water supply for fire protection.

Match the pump to the flow and pressure your protection design requires.



P15 example from the fire-pump range



Pump frame sizes

Bring a defined fire-system duty to WaterQuest for pump selection. The range provides component options for compact zones through larger simultaneous demands, with connections and supporting equipment selected around the application.

Models	Selection starting point
P1 / P3 / P6	Compact and smaller-flow duties.
P15	Intermediate flow requirements and defined system zones.
P60 / P180	Larger flow demands and coordinated supply packages.

Quote the equipment around the pump

Include inlet filtration, drive, pressure protection, controls, instruments and compatible stainless fittings. Define testing and service access early so the finished package supports the operating plan.

Send the design duty. Include required flow and pressure at the supply point, operating duration, water conditions, standby requirements and the applicable approval route.

Pump components are selected within the approved fire-protection design. Component ratings do not establish a complete water-mist or sprinkler-system listing. Final pump ratings and approvals are confirmed for the selected configuration.

Discuss your fire-pump requirements.

Request a component or package quotation against your approved system duty.

bruce@waterquestsolutions.com | +1 (604) 902-1902

Product images show representative configurations. Final selection is matched to your duty.

DUPLEX 2205 SEAWATER PUMPS

Built for seawater duty.

Choose the wetted materials and pump size for the saltwater you handle.



Representative large axial-piston frame; seawater build specified on order

Support desalination and saline-service pumping with a dedicated Duplex 2205 configuration. Three-port boosted operation separates feed, delivery and case drain.

Model	Displacements cm³/rev (in³/rev)	Maximum flow m³/h (US gpm)	Max. rpm
P6	4.6 / 6 (0.281 / 0.366)	0.55 / 0.72 (2.42 / 3.17)	2,000
P15	12 / 15 / 19 (0.732 / 0.915 / 1.16)	1.58 / 1.98 / 2.51 (6.96 / 8.72 / 11.1)	2,200
P30	23 / 30 / 35 (1.40 / 1.83 / 2.14)	2.76 / 3.6 / 4.2 (12.2 / 15.9 / 18.5)	2,000
P60	51 / 63 / 70 / 80 (3.11 / 3.84 / 4.27 / 4.88)	6.1 / 7.5 / 8.4 / 9.6 (26.9 / 33.0 / 37.0 / 42.3)	2,000
P180	135 / 180 / 225 (8.24 / 11.0 / 13.7)	16.2 / 21.6 / 27 (71.3 / 95.1 / 119)	2,000
P300	286 (17.5)	34.3 (151)	2,000
P600	390 / 625 (23.8 / 38.1)	29.3 / 46.8 (129 / 206)	1,250

Published continuous pressure: 80 bar (1,160 psi). Flow values are range maxima; delivered duty depends on pressure, speed and displacement. Confirm salinity, temperature, inlet conditions and cleaning chemistry.

Size your seawater pump.

Send normal/peak flow, operating pressure, seawater conditions and drive speed.


bruce@waterquestsolutions.com | +1 (604) 902-1902

Product images show representative configurations. Final selection is matched to your duty.

REVERSE OSMOSIS POWER CENTRES

Put brine pressure back to work.

Recover useful energy while supplying the membrane duty.

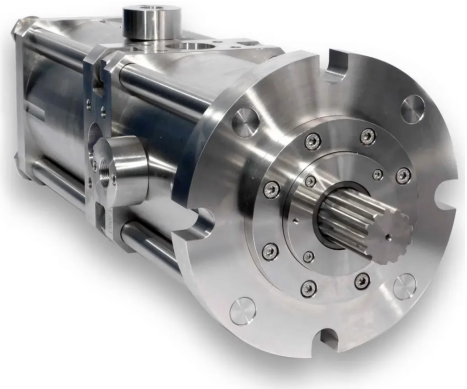

Integrated pumping and energy recovery



Representative drive assembly

RO concentrate leaves the membrane with pressure that can still do useful work. A Power Centre uses that brine pressure to assist the high-pressure feed-pump drive, helping reduce the shaft input required at the selected duty.

Model	Product family
PC250	Integrated feed pumping and brine energy recovery.
PC300	Integrated feed pumping and brine energy recovery.
PC500	Larger pump and energy-recovery arrangement.
PC1000 Power Centre Plus	Larger arrangement with two pump sections.

Compare the right plant duty

We'll help you work from the permeate target, recovery ratio, feed/brine conditions and membrane pressure requirement. Coordinate the Power Centre with the upstream feed supply, drive, flushing and controls.

Energy recovery and plant output depend on the operating conditions. State whether pretreatment, feed pumps and other auxiliaries are included in any energy comparison.

Request a Power Centre review.

Send feed/permeate flow, recovery ratio, salinity, temperature and membrane pressure.

bruce@waterquestsolutions.com | +1 (604) 902-1902

Product images show representative configurations. Final selection is matched to your duty.

HALO PLANT-BASED ODOUR CONTROL

Make odour control part of the plan.

Pair treatment chemistry with delivery built around the source.



Halo product literature



Water pressurisation component

Halo combines plant-based odour treatment with water-pressurised atomising delivery. Focus the application where releases occur, then match dose, coverage and controls to the site's operating pattern.

Where to start	Application opportunities
Wastewater and biosolids	Receiving, storage, tanks and sludge-handling areas.
Waste and organics	Transfer, tipping, storage, turning and active handling.
Industrial operations	Suitable process areas and releases with a defined treatment zone.

Specify the delivery with the product

Coordinate water supply, filtration, pump, dosing, nozzles, zoning and controls. Include product use, operating schedule and service access in the application brief.

Start with a focused trial. Define the baseline, treatment area and success criteria, then compare the response under representative operating conditions. Use the result to guide the next investment.

Formulation, dose and site suitability are selected for the compounds and conditions present. Performance is assessed against agreed application criteria.

Discuss Halo for your site.

Tell us the odour source, release pattern, treatment area and available utilities.


bruce@waterquestsolutions.com | +1 (604) 902-1902

Product images show representative configurations. Final selection is matched to your duty.

WQS STAINLESS ADAPTERS

Connect your system with stainless.


The right thread, sealing face and orientation - from one enquiry.




BSPP straight adapter



BSPP elbow



ORFS adapter



JIC 37° union

Complete a new build or solve a connection problem with stainless adapters across the common hydraulic interfaces. Send both end details and we'll help identify the configuration to quote.

Connection family	Product forms
BSPP / BSPT	Straight male adapters; male-female and swivel adapters; reducers; fixed female connectors; hexagonal couplings; bulkheads and counter-nuts.
NPT / NPSM / UNF	Male-male and male-female adapters; reducers; fixed female couplings; NPT-to-NPSM swivel and UNF-to-NPSM connections.
JIC 37° / O-ring boss	O-ring boss straight and adjustable adapters; JIC transitions; O-ring boss-to-NPT; adjustable elbows and branch/run tees.
ORFS	Straight unions and reducers; JIC and BSPP transitions; bulkheads; 90° elbows; tees; nuts, weld nipples, caps, plugs and FKM O-rings.
Directional forms	45° and 90° elbows; forged elbows; male/female/swivel tees; crosses; adjustable stud forms.
Banjos and closures	BSPP banjos; BSPP and metric banjo bolts; BSPP, NPT and O-ring boss plugs/caps; BSPP and metric bonded seals.

Small components. A complete circuit.

Ask for the adapters, plugs, bonded seals, O-rings and supporting fittings with your pump, motor or valve package. Matching material and sealing details helps avoid rework at installation.

Specify BSPP, BSPT, NPT/NPSM, UNF, JIC 37°, ORFS or O-ring boss precisely. Working pressure, temperature and seals are item-specific; pump ports requiring BSPP must use the specified parallel-thread connection.

Send your fitting list or a connection drawing.

Include thread standard, size, end form, angle, material, seal and quantity.


bruce@waterquestsolutions.com | +1 (604) 902-1902

Product images show representative configurations. Final selection is matched to your duty.


TrAle LOK TWIN-FERRULE FITTINGS

A clean connection for tubing.

Build instrument, sample and control tubing runs with matched components.

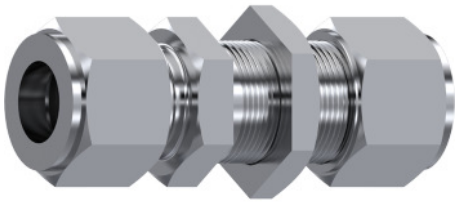

Straight bulkhead coupling

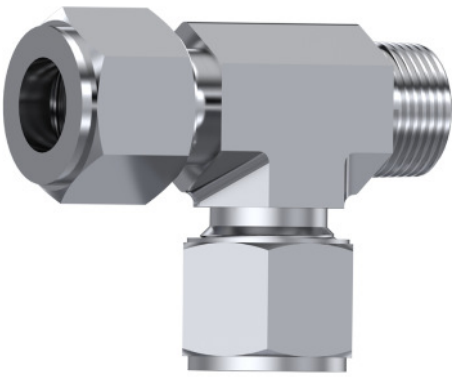

NPT branch / tee form



Front ferrule

Twin-ferrule compression fittings bring tube connections, threaded transitions and panel interfaces into a coordinated range. Use them in suitable instrumentation, sample-line and equipment tubing applications.

Product family	Available forms
Tube-to-tube	Straight and reducing couplings; equal elbows, tees and crosses.
Tube-to-thread	BSPT/NPT male and female studs; male stud elbows; NPT branch and barrel tees; pipe adapters.
Panel connections	Straight and NPT bulkheads; tube-end reducers.
Assembly and service parts	Front/back ferrules, nuts, caps and plugs.

Quote the tube run as a package

Combine straight connectors, direction changes, bulkheads and service parts in one bill of materials. Specify tube outside diameter and wall so the fittings can be selected with the tubing.

Confirm tube material, wall, hardness, pressure and temperature. Follow the selected manufacturer's assembly instructions and use matched components.

Request a tubing-connection package.

Send a tube schedule, sketch or bill of materials with connection sizes and quantities.

bruce@waterquestsolutions.com | +1 (604) 902-1902

Product images show representative configurations. Final selection is matched to your duty.


PIPE, FLANGES & WELDING FITTINGS


Build the stainless backbone.

Connection hardware for permanent pipework and serviceable equipment.


Metric tube elbow


JIC weld elbow


Swivel flange


Tube support clamp

Product family	Range highlights
Pipe and schedule fittings	Rigid pipe in 3 / 6 m (9.84 / 19.7 ft) lengths; Schedule 40 pipe; Schedule 10 caps, tees and reducers; socket-weld forms.
Metric / DIN tube fittings	DIN 3861 cutting rings, DIN 3870 nuts, studs, elbows, tees, reducers and light/heavy-series forms.
Threaded and JIC connections	BSPP, BSPT, NPT, UNF and JIC 37° transitions; bulkheads, banjos, gauge couplings and plugs.
Flanges and supports	SAE flanges/counter-flanges; split and blind forms; seals; light/heavy/double clamps, plates, rails and fasteners.
Weld ends	BSPP/BSPT/NPT weld nipples and male ends; JIC, metric and ORFS swept and guided forms.
Weld flanges and unions	ANSI-ASA Class 150/300; DIN PN10, PN10/16 and PN40 forms; rings, weld tubes and microcast three-piece unions.

From component list to installation package

Bring the pipe, fittings, flanges, seals and support hardware into the same enquiry. We can help identify the interfaces needed for your equipment and fabrication plan.

Material grade, wall/schedule, flange class, sealing face and weld preparation are selected for the application. The assembly rating depends on the exact components and operating conditions.

Send us your pipework bill of materials.

Include sizes, standards, material grade, pressure/temperature and fabrication requirements.


bruce@waterquestsolutions.com | +1 (604) 902-1902

Product images show representative configurations. Final selection is matched to your duty.


HOSE & INDUSTRIAL FITTINGS

Make every transfer connection count.


Stainless interfaces for process, transfer and flexible assemblies.

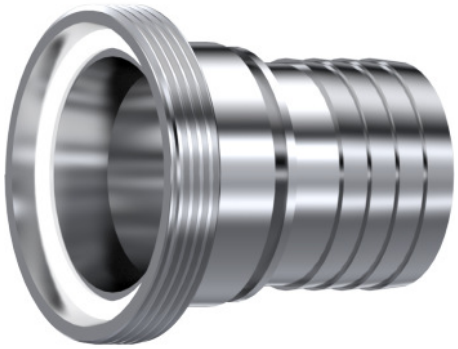

DIN 11851 connection

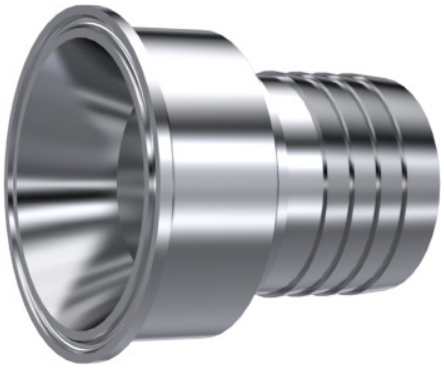

ISO 2852 clamp fitting

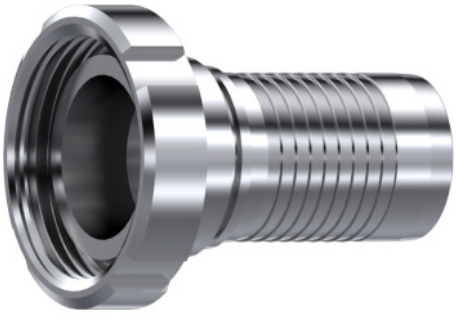

PTFE hose connection

Family	Product forms
DIN 11851	Fixed male, swivel female, weld ends/liners, nuts and PTFE or silicone joints.
SMS	Male/female connections, weld ends, nuts, blind nuts and PTFE or silicone joints.
Macon	Fixed male, swivel female and union nuts.
Clamp unions	ISO 2852 Tri-Clamp fittings, covers, weld forms, clamps and joints.
PTFE hose connections	Standard-series DIN 11851, SMS and clamp ends; smooth/convoluted PTFE ferrules.
Convoluted PTFE / hose ferrules	SMS swivel forms, food-fitting ferrules and crimping ferrules.

A better fit starts with the hose specification

Send the hose manufacturer, series, bore and liner construction with the end-connection requirements. Quote loose fittings or define the assembly and testing scope you need.

Hygienic/food-contact suitability and fluid compatibility are confirmed for the exact components and assembly. Some catalogue clamps are AISI 304; select the material grade rather than assuming one grade across the range.

Request your hose-connection quotation.

Include hose details, each end standard, working pressure, temperature and quantity.


bruce@waterquestsolutions.com | +1 (604) 902-1902

Product images show representative configurations. Final selection is matched to your duty.

STAINLESS VALVES, INSTRUMENTS & ACCESSORIES

Control, connect and measure.

Finish the circuit with the components operators and service teams need.



Ball valve



Flow-control valve



Pressure gauge



Flat-face coupling

Product group	Range highlights
Flow-control components	Bidirectional/unidirectional valves; forged and male/female forms; inline check and relief valves.
Ball valves	Two-way and three-way forms; BSPP/NPT and light/heavy tube-series connections; TrAle options and handles.
Pressure measurement	DN63 / DN100 gauges (2.48 / 3.94 in nominal dial); rear/vertical connections; calibrated manometers.
Gauge and test connections	Inline/90° gauge protectors, adapters, test couplings, metal caps and checking fittings.
Micro-hose fittings	Metric, BSPP 60°, JIC 37° and gauge interfaces; standpipes and ferrules.
Quick couplings	ISO 16028 flat-face; 7241-A/B; free-flow and screw forms; ISO 14541 and connection-under-pressure options.
Swivels and accessories	Straight and elbow swivel fittings; handles, closures and supporting installation parts.

Put service access into the original build

Plan isolation, pressure indication, test points and disconnects while the equipment is being specified. Include these items with the main system or order them for an existing installation.

General hydraulic components require item-specific water-service compatibility review. Pressure, seal, material and temperature limits apply to the selected part and complete connection.

Complete your component list with us.

Send part references or required functions, connection sizes and operating conditions.


bruce@waterquestsolutions.com | +1 (604) 902-1902

Product images show representative configurations. Final selection is matched to your duty.

ARMAK GEARED PISTON AIR MOTORS

Put compressed air to work.

A versatile rotary-drive range for machinery, handling and process equipment.

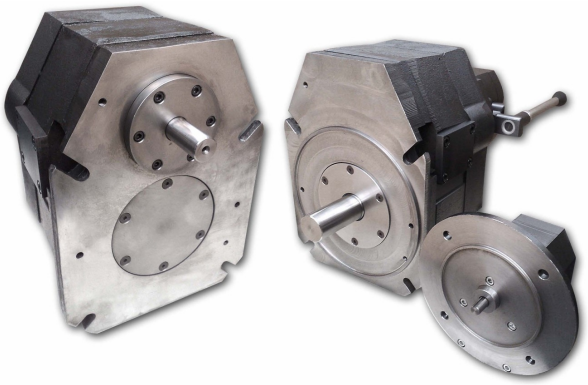

Armak geared piston motor range

Choose pneumatic rotary power with geared piston motors from 1.8 to 16 kW (2.4 to 21.5 hp). Contact-free rotating pistons transfer torque through synchronised gears; mounting and output options help integrate the motor with your driven equipment.

Model / equivalent	Power at 6 bar kW (hp)	Start torque at 6 bar N·m (lbf·ft)	Air port	Mass kg (lb)
AGP01 / AGP110E	1.8 (2.4)	6.3 (4.6)	G¾ BSPP	12 (26.5)
AGP04 / AGP210E	3.5 (4.7)	13 (9.6)	G¾ BSPP	14 (30.9)
AGP06	7.3 (9.8)	20 (14.8)	G¾ BSPP	17 (37.5)
AGP07 / AGP310A	8.0 (10.7)	55 (40.6)	G2 BSPP	60 (132)
AGP10 / AGP410A	11 (14.8)	110 (81.1)	G2 BSPP	75 (165)
AGP16 / AGP510A	16 (21.5)	110 (81.1)	G2 BSPP	85 (187)

Configure the drive around the job

IEC B5 interfaces support standard transmission equipment. Keyed shaft, internal spline, gearing, brake and proportional-control options are selected by model and duty.

Performance reference: 6 bar (87 psi), using individual manufacturer model sheets. Maximum inlet: 8 bar (116 psi). Motors require filtered, water-separated, regulated and lubricated air. Confirm continuous speed, air consumption and exact configuration for the duty.

Find the Armak motor for your application.

Send breakaway/running torque, speed, duty cycle and available air pressure/flow.


bruce@waterquestsolutions.com | +1 (604) 902-1902


Product images show representative configurations. Final selection is matched to your duty.

ARMAK CONTROLS & ACCESSORIES


More than a motor. A matched drive.

Build the control and transmission around starting, running and stopping.


Lever / motor control


Remote control


Air preparation


Parking brake

Option	What it adds to the package
LCV lever control	Proportional local motor control; lever position and power direction selected to suit operation.
RCV remote control	Proportional remote operation with suitable pilot controls and remote station.
Power / pilot valves	Additional exhaust capacity on applicable motors for the required high-power direction.
Check plate	Application-sized exhaust restriction coordinated with load control and brake release.
Shut-off / emergency stop	Integral E-stop, remote E-stop or external shut-off/interlock arrangements.
Silencers / FRL	Exhaust silencing plus filtration, water separation, pressure regulation and lubrication; size for air demand.
Parking brakes	Spring-applied, air-released static holding; coordinated with pneumatic deceleration.
Gearboxes / interfaces	Ratio, mounting, shaft form and load capacity matched to the driven equipment.
Remote / limit functions	Pilot lever, remote E-stop and limit-stop accessories for the operating sequence.

Parking brakes are not for dynamic braking. Account for pressure losses and no-load overspeed. Hazardous-area service requires current documentation for the exact motor and assembly.

Request a complete Armak drive quotation.

Include motor duty, gearbox, brake, local/remote control and stopping requirements.

bruce@waterquestsolutions.com | +1 (604) 902-1902

Product images show representative configurations. Final selection is matched to your duty.


YOUR NEXT PROJECT

Let’s turn the requirement into a quote.


A single component, a replacement part or a coordinated system.



Systems

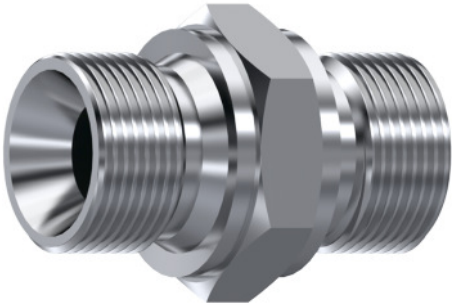

Connections

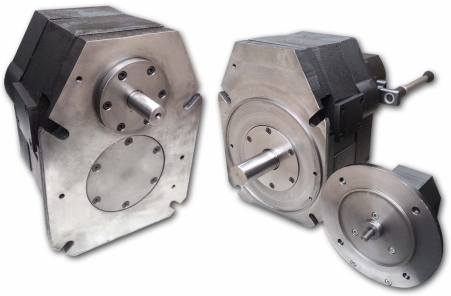

Pneumatic drives

Building something new?

Send the operating duty, site utilities, available space and control requirements. We’ll help identify the systems and components for your proposal.

Replacing or upgrading equipment?

Send the existing model, drawings, connection details and the problem you want to solve. Include photos where they help explain the installation.

Buying to a bill of materials?

Send part numbers, descriptions, sizes, materials and quantities. Identify required documentation and your target delivery date.

Include with your enquiry	Why it helps
Flow / pressure / force / torque / speed	Matches the component to useful output.
Working fluid, temperature and environment	Guides material, seal and configuration selection.
Connections, mounting and controls	Defines the interfaces for a complete quotation.
Quantity, schedule and delivery location	Sets the commercial scope for the enquiry.

Contact Bruce Hickin.

Canadian product-selection support | Vancouver, British Columbia

bruce@waterquestsolutions.com | +1 (604) 902-1902