
P6-6 | Fire-system pump

6 cm³/rev water-lubricated axial-piston configuration.

A compact water-lubricated pump for a specified fogging or water-mist system. Multiple pistons provide smooth delivery. Select pressure and flow from the engineered nozzle network, then match the motor, controls, standby arrangement and water supply.

Pressure bar (psi)	Flow L/min (US gpm)	Motor kW (hp)	IEC frame
80 (1,160)	8.3 (2.19)	1.5 (2.0)	90L
100 (1,450)	8 (2.11)	2.2 (3.0)	100L
120 (1,740)	7.7 (2.03)	2.2 (3.0)	100L
140 (2,031)	7.4 (1.95)	3 (4.0)	100L

Published flow selections

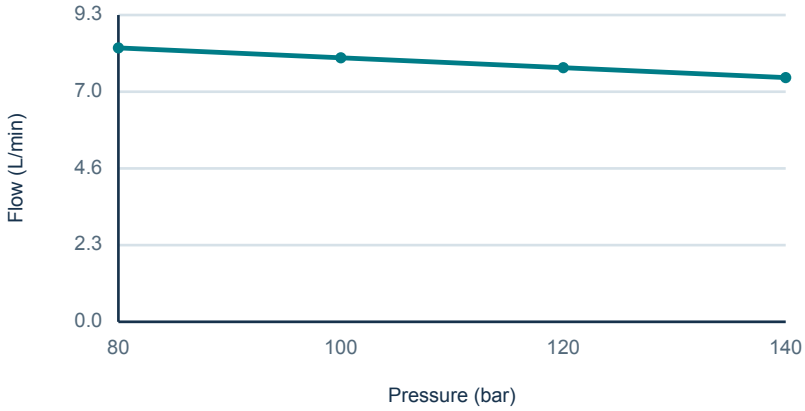

Source selection basis

400 V, four-pole, 50 Hz motor operation. Catalogue maximum continuous pump pressure: 160 bar (2,321 psi). Chart joins four published selection points; it does not extend the manufacturer curve to other duties.

Pressure (bar)	Published package code
80	P6-060-M08-S25
100	P6-060-M09-S25
120	P6-060-M09-S25
140	P6-060-M10-S25

Water reserve

Published usable tank: 25 L (6.6 US gal). The catalogue uses a 30-minute duration and a guaranteed 15 L/min refill assumption. Size the actual reserve from the specified duty and dependable supply.

Design and environmental value

Water lubricates the pump internals, avoiding oil contamination from a pump lubricating circuit. The source describes stainless construction, smooth multi-piston delivery and motor/pump or complete power-pack supply.


Procurement: specify duty, nozzle approvals, water supply, controls, power source, standby/jockey strategy, pressure protection, test/acceptance requirements and certification for the complete selected system. Catalogue nozzle counts and historical approval references are not a project design or current approval certificate.

Janus Fire Pumps Systems V.01.25, pp. 2-3. Package selection data; source motor basis retained.

P6-6 | Pump interfaces


Manufacturer technical reference | dimensions govern; reproduction is not to scale.

PB160-6.0W & PB160-4.6W

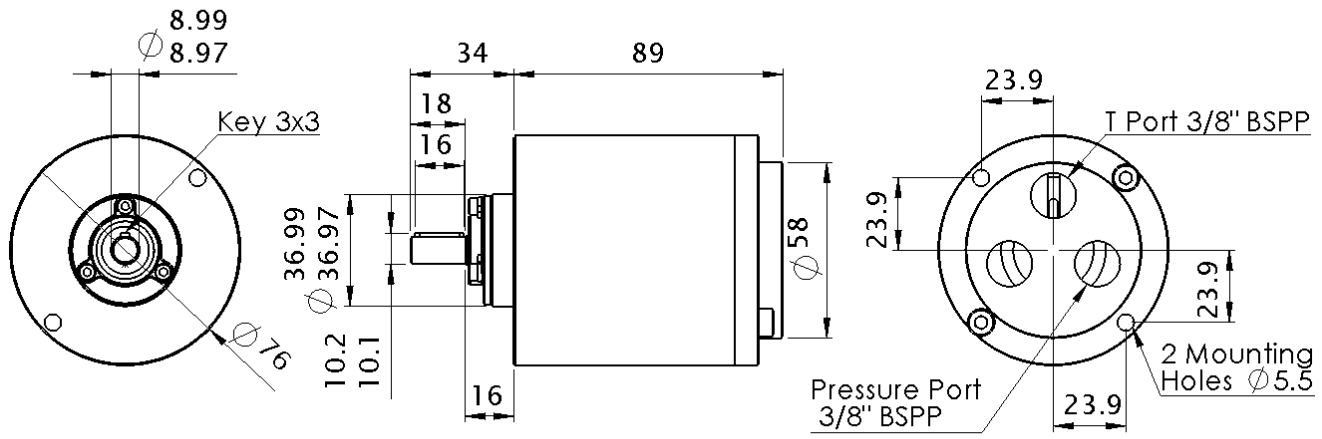

PC160-6.0W & PA160-6.0W

PC160-4.6W & PA160-4.6W

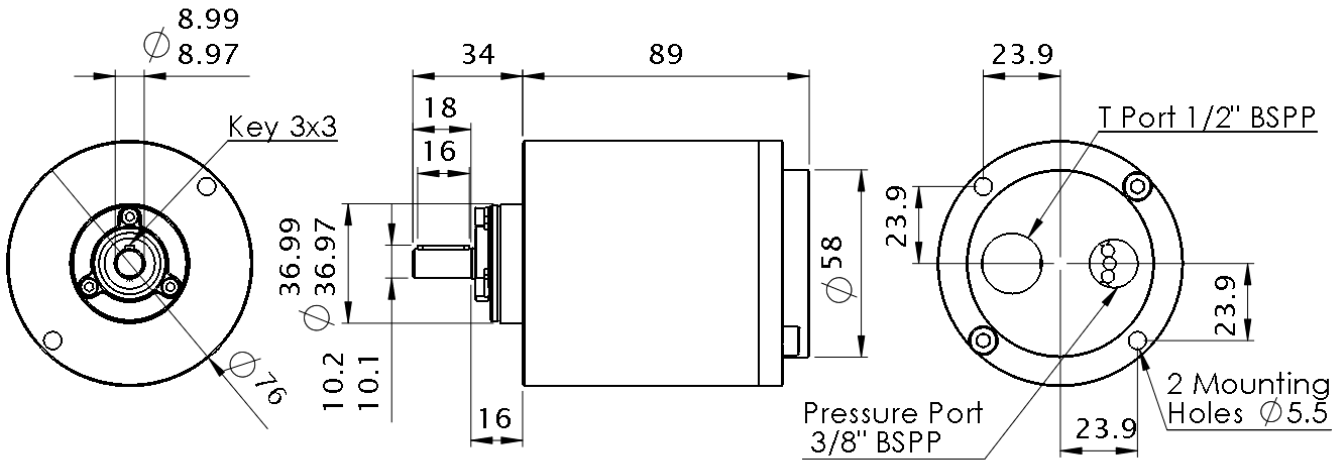

Family pump drawings identify interfaces. The complete fire-package dimensions, reservoir and controls are order-specific. Use the exact displacement and approved package drawing before installation.

Janus Axial Piston Water Pump - V.01.25 (3).pdf, p. 9.