
P60-63 | Fire-system pump

63 cm³/rev water-lubricated axial-piston configuration.

A compact water-lubricated pump for a specified fogging or water-mist system. Multiple pistons provide smooth delivery. Select pressure and flow from the engineered nozzle network, then match the motor, controls, standby arrangement and water supply.

Pressure bar (psi)	Flow L/min (US gpm)	Motor kW (hp)	IEC frame
80 (1,160)	91.5 (24.17)	15 (20.1)	160L
100 (1,450)	90.5 (23.91)	18.5 (24.8)	180M
120 (1,740)	89.5 (23.64)	22 (29.5)	180L
140 (2,031)	88.5 (23.38)	30 (40.2)	200L

Published flow selections

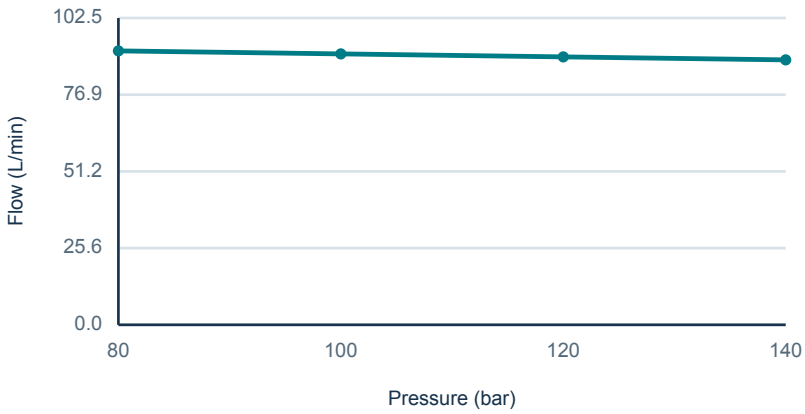

Source selection basis

400 V, four-pole, 50 Hz motor operation. Catalogue maximum continuous pump pressure: 160 bar (2,321 psi). Chart joins four published selection points; it does not extend the manufacturer curve to other duties.

Pressure (bar)	Published package code
80	P60-063-M15-S2300
100	P60-063-M16-S2300
120	P60-063-M17-S2300
140	P60-063-M18-S2300

Water reserve

Published usable tank: 2300 L (607.6 US gal). The catalogue uses a 30-minute duration and a guaranteed 15 L/min refill assumption. Size the actual reserve from the specified duty and dependable supply.

Design and environmental value

Water lubricates the pump internals, avoiding oil contamination from a pump lubricating circuit. The source describes stainless construction, smooth multi-piston delivery and motor/pump or complete power-pack supply.


Procurement: specify duty, nozzle approvals, water supply, controls, power source, standby/jockey strategy, pressure protection, test/acceptance requirements and certification for the complete selected system. Catalogue nozzle counts and historical approval references are not a project design or current approval certificate.

Janus Fire Pumps Systems V.01.25, pp. 2-3. Package selection data; source motor basis retained.

P60-63 | Pump interfaces

Manufacturer technical reference | dimensions govern; reproduction is not to scale.


PB160-51W, PB160-63W & PB160-70W

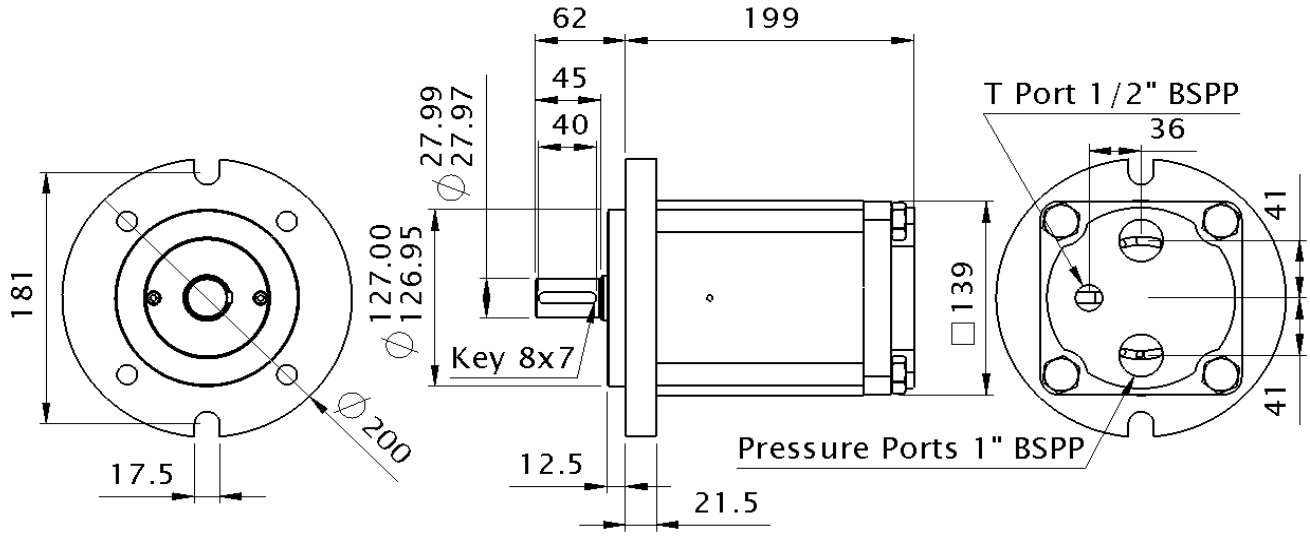

PC160-51W, PC160-63W & PC160-70W

PA160-51W, PA160-63W & PA160-70W

PPC160-51W, PPC160-63W & PPC160-70W (O ring face seal and M10 holes only added on PP Option)

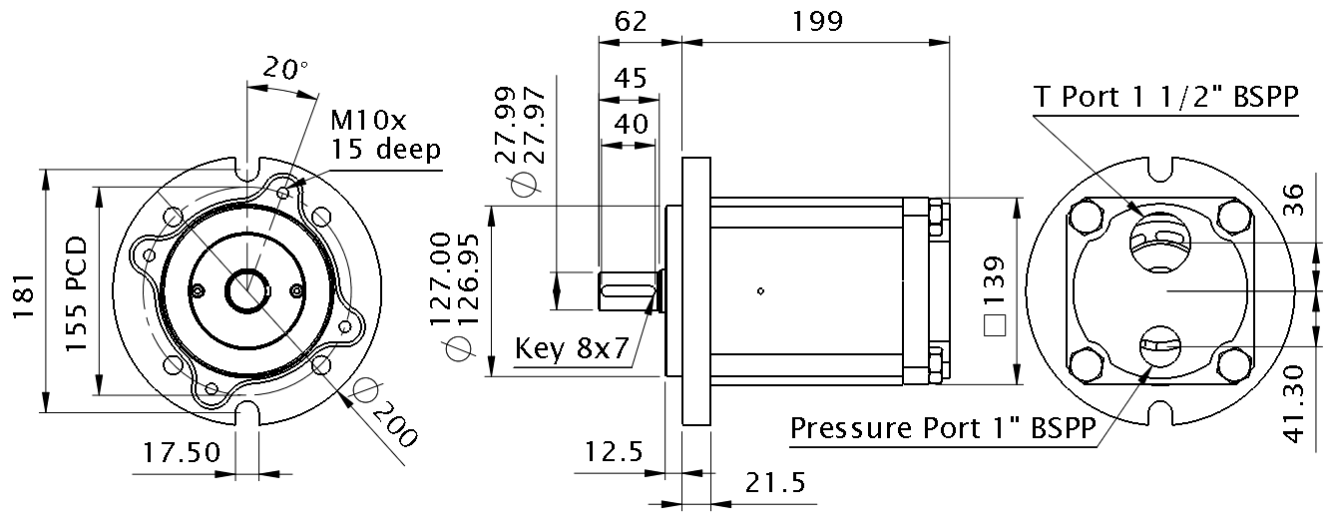

Family pump drawings identify interfaces. The complete fire-package dimensions, reservoir and controls are order-specific. Use the exact displacement and approved package drawing before installation.

Janus Axial Piston Water Pump - V.01.25 (3).pdf, p. 15.