
P6 | Water-hydraulic HPU

Pick-a-Pack modular power unit | pump, drive, reservoir, filtration and valve selection.

Configure the complete supply around the actuator or process duty. Water is the working fluid; stainless wetted components and selected wear materials support oil-free hydraulic operation. Match the fluid chemistry and temperature to the quoted components.

Package selection	Published configuration
Pump / nominal displacement	P6 / 4.6 / 6 cm³/rev
Pressure limit	160 bar (2,321 psi)
Reservoir code / capacity	S25 / S55 | 25 / 55 L
Published A × B × C reference (mm)	220-350 × 300-550 × 870-1050
Drive supply	400 V three-phase listed; 240 V single-phase to 2.2 kW (E suffix)
Installation supply	State site voltage, frequency, enclosure and control requirements

Pressure bar (psi)	Flow L/min (US gpm)	Selected motor kW (hp)
10 (145)	8.8 (2.32)	0.37 (0.50)
40 (580)	8.2 (2.17)	1.1 (1.48)
80 (1,160)	7.5 (1.98)	1.5 (2.01)
100 (1,450)	7.2 (1.90)	2.2 (2.95)
120 (1,740)	6.8 (1.80)	2.2 (2.95)
160 (2,321)	6.1 (1.61)	3 (4.02)

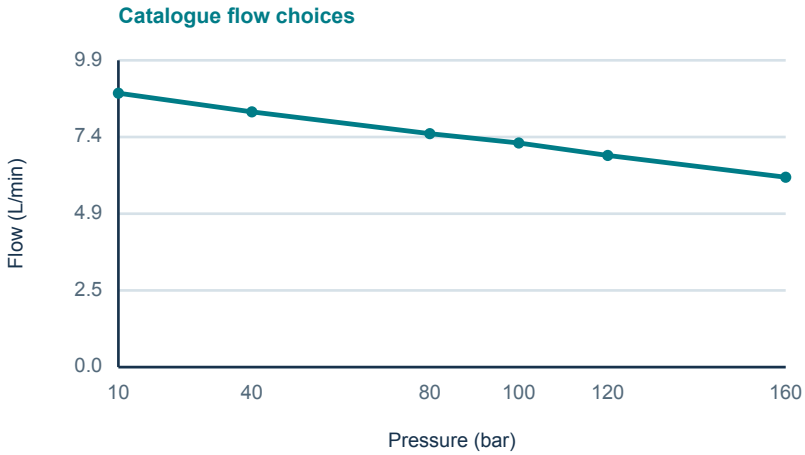

Read the package chart

Points reproduce the website selection table. Connecting segments aid reading; they are not a measured pump curve. Each pressure/flow pair carries its listed motor selection. Motor nameplate kW is not measured electrical input.

Design and environmental value

A configured package simplifies component coordination and removes hydraulic oil from the working circuit. Reservoir, filter and valve choices can be matched to duty and service access.

Efficiency and purchasing

Avoid oversizing or continuous relief flow. Specify duty cycle, standby strategy, return heat and cooling. Request a general arrangement, hydraulic circuit, controls list, full-load electrical data and commissioning/service plan.

WaterQuest HPU page, live selection tables accessed 17 Oct 2026. Package duty pairs, not bare-pump maxima.

P6 | Configuration & integration

Select the complete package before assigning an order code.

Filter / protection option	Published scope
1T	Return filter with gauge
2L	Return filter with pressure switch
3B	Return filter with gauge, incoming-water filter and auto-fill
4B	Return filter with pressure switch, incoming-water filter and auto-fill

Valve code	Function
C01	Relief
C02	Relief and check
C03	Relief, check and unloading
C04 / C05 / C06 / C07	Relief with 1 / 2 / 3 / 4 stations
Published valve sizing guide	DN3 up to 10 L/min; DN6 up to 22 L/min. Match each valve to actual duty.

Accessory code	Function
HP	Hand pump: 25 cm³/stroke
SG / LG	Pressure gauge / level gauge
HE / FC	Heat exchanger / fan cooler
T / M	Tank return / miscellaneous specified options

Installation interfaces

The A/B/C values are published reference dimensions, not a complete fabrication drawing. Confirm tank geometry, mount holes, centre of gravity, lifting, service clearances, cooling air, fill/drain arrangement, inlet conditions and accessible isolation. Provide electrical and hydraulic interfaces on the order.

Commissioning and service

Confirm rotation, water quality, cleanliness, filter monitoring, low-level protection, pressure relief and unloading settings before load testing. Include a documented flush/fill procedure and inspection schedule. Reservoir or component approval marks do not establish approval of the entire assembled HPU.

Example code shown by the website: P6-060-M09-S55-4B-C05-HP. This is a configuration example, not a universal model number. P30, P60 and P180 packages are offered on request and have no complete selection table in the accessible source.

WaterQuest HPU configuration page, accessed 17 Oct 2026.