Check Valves

Selection data & performance | Manufacturer technical reference.


The check valves are a unique range of valves which are supplied in 316 stainless steel and high grade engineering polymer as standard, for operation on tap water to EU directive 98/83/EC. Available in 3 sizes, the range offers consistent performance even after lengthy periods of inactivity.

SPECIFICATION					
	DN6	DN9	DN12	DN16	DN25
Pressure Range (bar)	0.1 - 200	0.1 - 200	0.1 - 200	0.1 - 200	0.1-200
Feed Gallery Diameter	6	9.5	12.7	16	25
Cv	0.65	0.65	1.92	4.5	6.6
Max Flow rate L/min	30	50	60	100	200
"A" Length	56.5	89	70	147.3	147.3
"B" A/F	25.6	22.2	29	42.4	42.4
"C" Thread	1/4" BSPP	3/8" BSPP	1/2" BSPP	3/4" BSPP	1" BSPP


The sealing and control of flow occurs at 2 separate positions within the valve. This ensures the seals are not subjected to high fluid velocities minimising the potential of seal flow erosion.

Cracking Pressure

Standard valves are offered with 1 bar cracking pressure. Cracking pressures from 0.1 bar to 6 bar are available. If specific pressures are required then please consult TWHC.

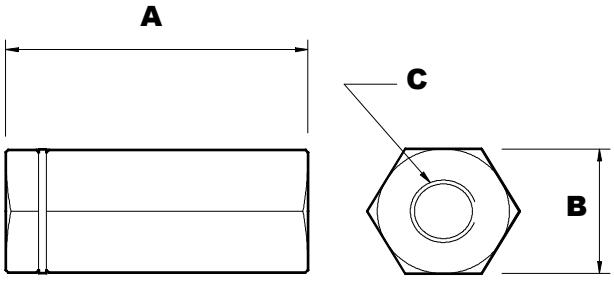

Dimensions in mm (see table)

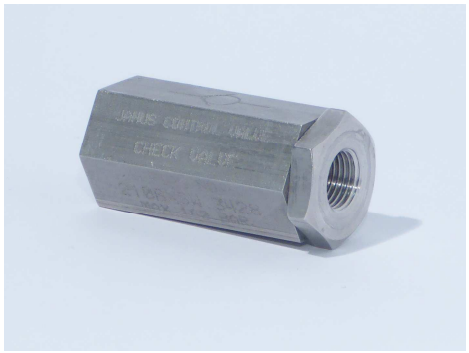

ORDERING CODES	DN6	DN9	DN12	DN16	DN25
Check	210BXSW	210CXSW	210DXSW	210EXSW	210FXSW

The Water Hydraulics Co. Ltd.

Alexandra House, English Street, Hull, East Yorkshire, HU3 2DJ, United Kingdom.

Tel: +44 (0)1482 595000, E-Mail: sales@waterhydraulics.co.uk.

England Website: www.waterhydraulics.co.uk

Whilst every endeavour has been made to ensure accuracy, this publication cannot be considered to represent part of any contract, whether expressed or implied. The publishers reserve the right to amend specification at their discretion.

V01.25

bsi ISO 9001 Quality Management Systems CERTIFIED

FM 87247

Specify cracking pressure, flow direction, pressure drop and allowable reverse leakage. Check the installation orientation and port/interface details. Water service removes hydraulic oil from the fluid circuit. Minimise unnecessary pressure loss; request configuration-specific approval evidence.

Check Valves V.01.25.pdf, p. 1. Manufacturer labels and dimensions retained.