
Manifolds


Selection data & performance | Manufacturer technical reference.

Available in 1 to 4 stations including with or without additional relief valve porting and produced in 316 stainless steel. The manifolds will accept the 3/2, 4/2 and 4/3 valve configurations in all actuation formations such as solenoid, pilot or manual.
Maximum flow rate is 30 l/min without integral relief and 22l/min if a 2M07BXSW is incorporated.

NO. OF STATIONS	1	2	3	4
Dimension A	47	94	141	188

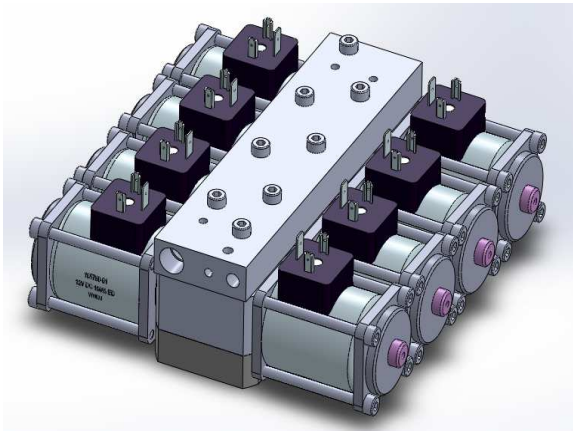

Dimensions

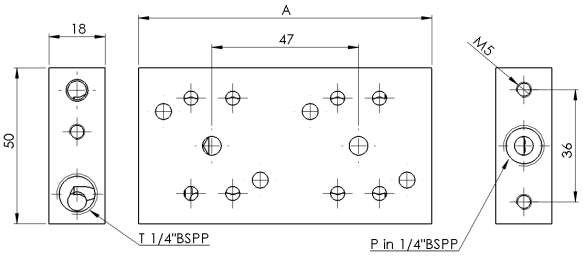


Assembly Layout Example

Consisting of:

- 6manir2: 2 station manifold including relief ports
- 2M07BXSW: DN6 manifold mounted relief valve
- 2M03BBSW: DN6 manifold mounted 3/2 directional control valve.
- 2M06BBSW: DN6 manifold mounted 4/3 directional control valve.

The relief valve has 2 through bolts which fasten through the manifold into the 3/2 valve opposite.

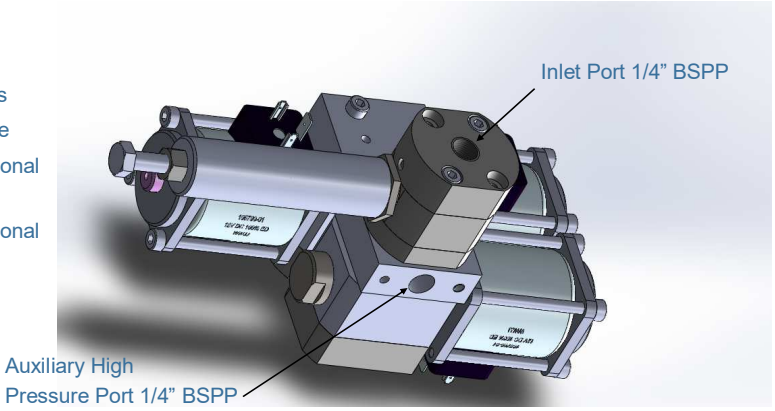

ORDERING CODE	1 STATION	2 STATION	3 STATION	4 STATION
STAND ALONE	6MANI1	6MANI2	6MANI3	6MANI4
INCLUDING RELIEF PORTS	6MANIR1	6MANIR2	6MANIR3	6MANIR4

The Water Hydraulics Co. Ltd.
Alexandra House, English Street, Hull, East Yorkshire, HU3 2DJ, United Kingdom.
Tel: +44 (0)1482 595000, E-Mail: sales@waterhydraulics.co.uk.
England Website: www.waterhydraulics.co.uk

Whilst every endeavour has been made to ensure accuracy, this publication cannot be considered to represent part of any contract, whether expressed or implied. The publishers reserve the right to amend specification at their discretion.

V01.25

bsi ISO 9001 Quality Management Systems CERTIFIED
FM 87247

Provide the full circuit, station functions, maximum pressure and flows. Confirm port/thread standards, mounting, proof test and external connection access. Water service removes hydraulic oil from the fluid circuit. Minimise unnecessary pressure loss; request configuration-specific approval evidence.

Manifolds V.01.25.pdf, p. 1. Manufacturer labels and dimensions retained.