Pressure Compensating Flow Control Valve


Selection data & performance | Manufacturer technical reference.

The pressure compensated flow control valve is designed to control the flow rate of tap drinking water in a hydraulic system. Fully adjustable between the specified ranges, the output flow can be regulated and maintained at a constant level irrespective of the output working pressure. The constant rate can be adjusted by allen key then loaded to prevent none desired alteration. The reverse flow gives a slightly restrictive orifice but vertically free for one way control. See graph for characteristics.


SPECIFICATION		
	DN3	DN6
Operating Pressure Range	5-160 bar	5-160 bar
Maximum Cv Value in flow control direction	0.2	0.7
Feed Gallery Diameter	3mm	6mm
Porting	1/4" BSPP	1/4" BSPP
Construction Materials	316 Stainless Steel Polymer	316 Stainless Steel Polymer
Number of turns Fully open to fully closed	5	6
Media	Tap Water	Tap Water
Flow Range	0.5—5 L/min	3—30 L/min




Flow Characteristics DN3

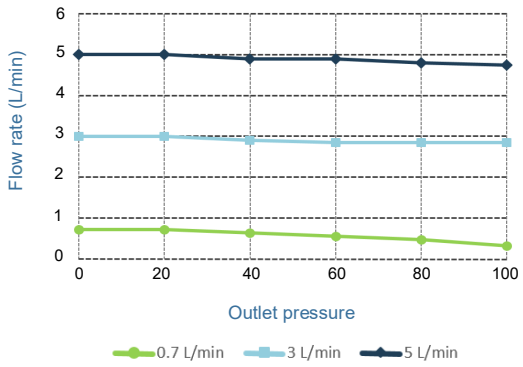

Flow Characteristics DN6

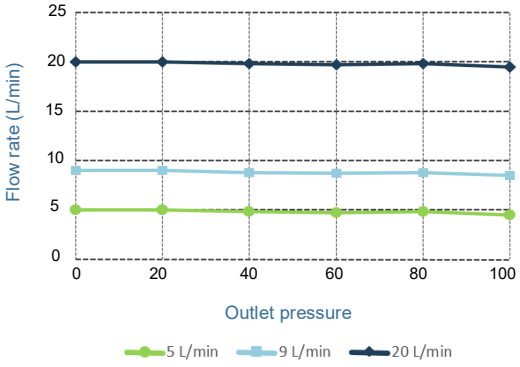

Inlet pressure/ Relief setting 130 bar
Minimum operating pressure 5 bar

ORDERING CODES	DN3	DN6
	216AXSW	216BXSW


Select regulation range and allow the pressure margin needed to compensate. Check minimum operating pressure and heat loss across the valve. Water service removes hydraulic oil from the fluid circuit. Minimise unnecessary pressure loss; request configuration-specific approval evidence.

Pressure Compensating Flow Control Valve V.01.25.pdf, p. 1. Manufacturer labels and dimensions retained.


Pressure Compensating Flow Control Valve

Dimensions, connections & configuration | Manufacturer technical reference.

216AXSW

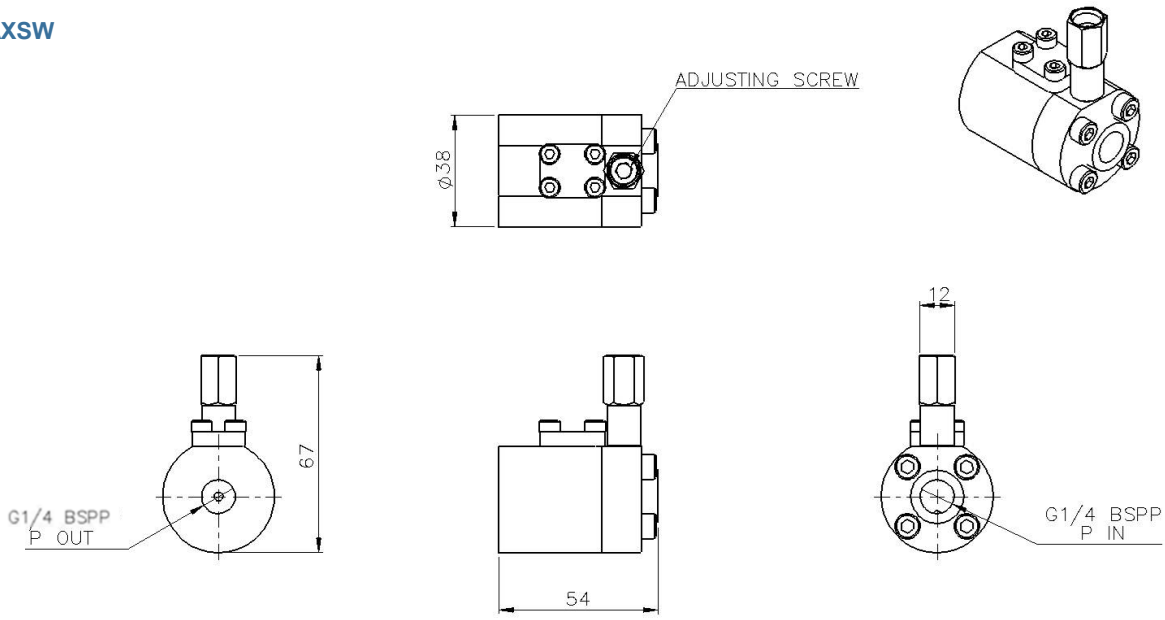

216BXSW

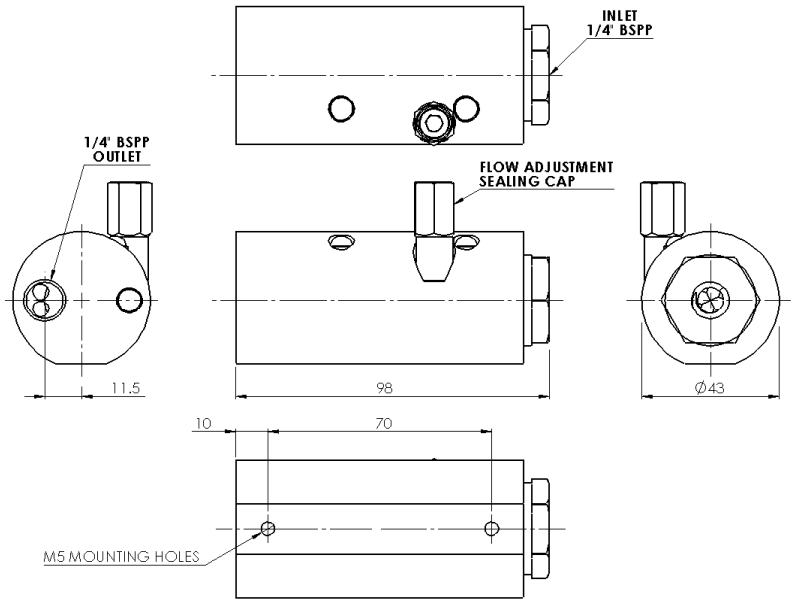

The Water Hydraulics Co. Ltd.
Alexandra House, English Street, Hull, East Yorkshire, HU3 2DJ, United Kingdom.
Tel: +44 (0)1482 595000, E-Mail: sales@waterhydraulics.co.uk.
England Website: www.waterhydraulics.co.uk
Whilst every endeavour has been made to ensure accuracy, this publication cannot be considered to represent

V01.25

bsi ISO 9001 Quality Management Systems CERTIFIED
FM 87247

Select regulation range and allow the pressure margin needed to compensate. Check minimum operating pressure and heat loss across the valve. Water service removes hydraulic oil from the fluid circuit. Minimise unnecessary pressure loss; request configuration-specific approval evidence.

Pressure Compensating Flow Control Valve V.01.25.pdf, p. 2. Manufacturer labels and dimensions retained.