Pressure Reducing Valves


Selection data & performance | Manufacturer technical reference.

A patented range of valves designed to control pressure in a hydraulic system using tap water to EU directive 98/83/EC. Designed specifically for fluids with low viscosity, the valve offers accurate control with high resistance to flow erosion experienced in pressure control applications.

SPECIFICATION	
Max Inlet Pressure	180 Bar
P Out Setting Range	1 10 to 30 Bar 2 30 to 100 Bar 3 70 to 160 Bar
Maximum Flow	0-30 L/min
Feed Gallery Diameter	6mm
Porting	1/4" BSP (Parallel)
Construction Materials	316 Stainless Steel & Polymer
Media	Water



Flow Characteristics

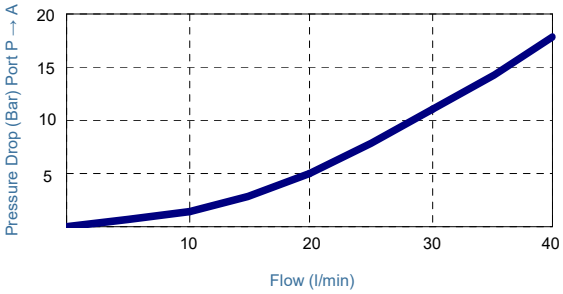

Function

Designed to protect equipment from high system pressure in multi function circuits. An example of use is to limit the force of a cylinder when higher system pressure is needed for other functions. The valve is designed to limit the pressure in the P out port even if there is zero flow demand in this line. This function ensures cylinder force control even under stall or reaching an end stop condition. The valve restricts the inlet when nearing the control pressure setting and with the same action, relieves the service line to tank ensuring only minimal energy is lost from the system.

The pressure can be reduced to a maximum of 70% of the inlet pressure in one stage, e.g. 100 bar system pressure, minimum reduced pressure 30 bar.

Reverse Flow

The valve does not offer a restriction with reverse flow.

ORDERING CODE	DN6
 Reducing Valve 10 to 30 bar	109BXSW
 Reducing Valve 30-100 bar	209BXSW
 Reducing Valve 70-160 bar	309BXSW


Define downstream set pressure, supply variation and flow. Check minimum regulating differential, drain/backpressure effects and relieving requirements. Water service removes hydraulic oil from the fluid circuit. Minimise unnecessary pressure loss; request configuration-specific approval evidence.

Pressure Reducing Valves V.01.25.pdf, p. 1. Manufacturer labels and dimensions retained.

Pressure Reducing Valves

Dimensions, connections & configuration | Manufacturer technical reference.

109BXSW, 209BXSW & 209BXSW

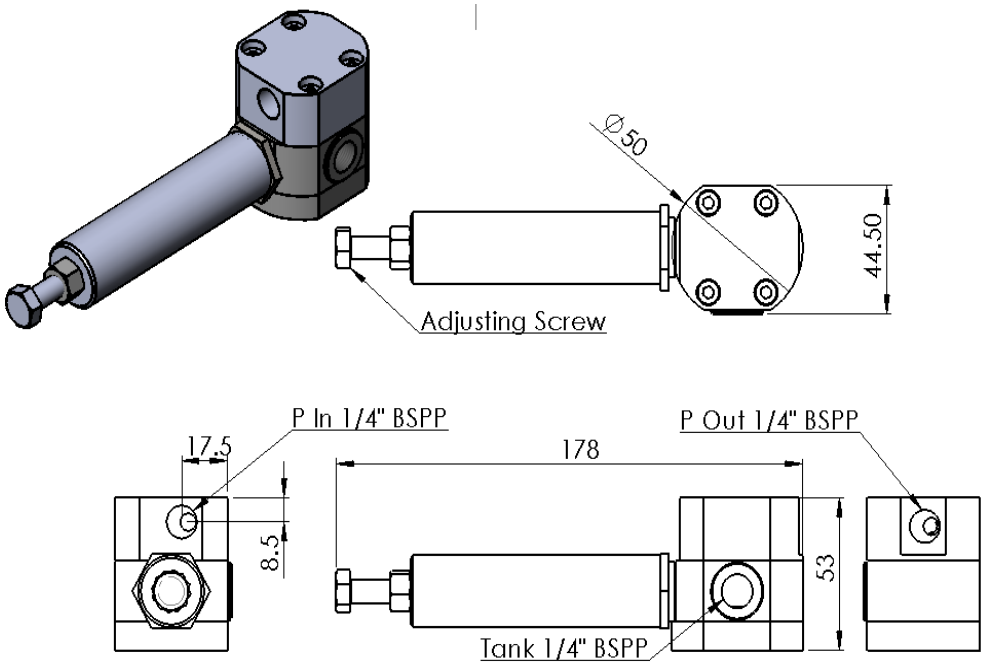

The Water Hydraulics Co. Ltd.
Alexandra House, English Street, Hull, East Yorkshire, HU3 2DJ, United Kingdom.
Tel: +44 (0)1482 595000, E-Mail: sales@waterhydraulics.co.uk.
England Website: www.waterhydraulics.co.uk
Whilst every endeavour has been made to ensure accuracy, this publication cannot be considered to represent part of any contract, whether expressed or implied. The publishers reserve the right to amend specification at their discretion.

V01.25

bsi ISO 9001 Quality Management Systems CERTIFIED
FM 87247

Define downstream set pressure, supply variation and flow. Check minimum regulating differential, drain/backpressure effects and relieving requirements. Water service removes hydraulic oil from the fluid circuit. Minimise unnecessary pressure loss; request configuration-specific approval evidence.

Pressure Reducing Valves V.01.25.pdf, p. 2. Manufacturer labels and dimensions retained.